

## Positive Temperature Coefficient (PTC) Data Sheet

### Description

The 250V series provides radial resettable overcurrent protection with holding current from 0.03A to 2.0A. This series is suitable for applications with higher working voltage up to 250V.

### Features

- Radial leaded devices.
- High voltage surge capabilities
- Flame retardant epoxy polymer insulating material meets UL94 V-0 requirement.
- Over-current protection
- Available in lead-free version.
- Operating Temperature: -40°C~+85°C
- Meets MSL level 1, per J-STD-020

### Applications

- Powered supplies
- Security systems
- Network equipment
- IT equipment
- XDSL equipment
- Motor protection

### Electrical Characteristics

Part Number	Marking	I <sub>hold</sub> (A)	I <sub>trip</sub> (A)	V <sub>max</sub> (V <sub>AC</sub> )	I <sub>max</sub> (A)	Pd typ. (W)	Maximum time to trip		Resistace	
							Current(A)	Times (S)	R <sub>min</sub> (Ω)	R <sub>max</sub> (Ω)
FTR250-030	JK250 030U	0.030	0.060	250	1	0.6	0.15	5.0	35.0	90.0
FTR250-040	JK250 040U	0.040	0.080	250	3	0.7	0.20	6.0	27.0	65.0
FTR250-060	JK250 060U	0.060	0.120	250	3	0.8	0.30	5.0	20.0	45.0
FTR250-080	JK250 080U	0.080	0.160	250	3	0.8	0.40	5.0	10.0	22.0
FTR250-090	JK250 090U	0.090	0.180	250	3	0.8	0.45	5.0	7.0	20.0
FTR250-110	JK250 110U	0.110	0.220	250	3	1.0	0.55	5.0	6.0	12.0
FTR250-120	JK250 120U	0.120	0.240	250	3	1.0	0.60	5.0	6.0	10.5
FTR250-145	JK250 145U	0.145	0.290	250	3	1.0	0.73	15.0	3.5	6.5
FTR250-180	JK250 180U	0.180	0.540	250	10	1.5	0.90	15.0	3.0	10.0
FTR250-200	JK250 200U	0.200	0.400	250	10	1.5	1.00	9.0	3.0	6.0
FTR250-250	JK250 250U	0.250	0.500	250	10	1.5	1.25	7.0	1.6	4.8
FTR250-400	JK250 400U	0.400	0.800	250	10	2.0	2.00	9.0	1.0	3.0
FTR250-600	JK250 600U	0.600	1.200	250	10	2.5	3.00	8.0	0.6	2.0
FTR250-800	JK250 800U	0.800	1.600	250	10	2.7	4.00	18.0	0.4	1.0
FTR250-1000	JK250 1000U	1.000	2.000	250	10	2.9	5.00	21.0	0.3	0.8
FTR250-1500	JK250 1500U	1.500	3.000	250	10	3.9	7.50	23.0	0.2	0.6
FTR250-2000	JK250 2000U	2.000	4.000	250	10	4.5	10.00	28.0	0.1	0.4

- I<sub>hold</sub>= Hold current: maximum current device will pass without tripping in 25°C still air.
- I<sub>trip</sub>= Trip current: minimum current at which the device will trip in 25°C still air.
- V<sub>max</sub>= Maximum voltage device can withstand without damage at rated current (I<sub>max</sub>)
- I<sub>max</sub>= Maximum fault current device can withstand without damage at rated voltage
- Pd typ.= Typical power dissipated from device when in the tripped state at 23°C still air.
- R<sub>min</sub>= Minimum resistance of device in initial (un-soldered) state.
- R<sub>max</sub>= Maximum resistance of device in initial (un-soldered) state.


## Test Procedures and Requirement

Items	Test Conditions	Accept/Reject Criteria
Resistance	In still air @25°C	$R_{min} \leq R \leq R_{max}$
Time to Trip	Specified current, V max , 25°C	$T \leq \text{max. Time to trip (T trip)}$
Hold Current	30 min, at I <sub>hold</sub>	No trip
Trip Cycle Life	V max , I max , 100 cycle	No arcing or burning
Trip Endurance	V max , 24hours	No arcing or burning

## Thermal Derating Chart - I<sub>hold</sub>


Part Number	Ambient Operation Temperature									
	-40°C	-20°C	0°C	25°C	30°C	40°C	50°C	60°C	70°C	85°C
FTR250-030	0.044	0.040	0.035	0.030	0.027	0.025	0.023	0.020	0.017	0.013
FTR250-040	0.058	0.053	0.047	0.040	0.036	0.034	0.031	0.027	0.024	0.019
FTR250-060	0.085	0.079	0.070	0.060	0.055	0.051	0.046	0.041	0.037	0.029
FTR250-080	0.113	0.106	0.094	0.080	0.073	0.068	0.062	0.054	0.049	0.038
FTR250-090	0.131	0.119	0.105	0.090	0.082	0.077	0.069	0.061	0.055	0.043
FTR250-110	0.160	0.145	0.129	0.110	0.100	0.094	0.085	0.075	0.067	0.053
FTR250-120	0.172	0.158	0.140	0.120	0.109	0.102	0.092	0.082	0.073	0.058
FTR250-145	0.210	0.191	0.170	0.145	0.132	0.123	0.112	0.099	0.088	0.070
FTR250-180	0.260	0.238	0.211	0.180	0.164	0.153	0.139	0.122	0.110	0.086
FTR250-200	0.290	0.264	0.234	0.200	0.182	0.170	0.154	0.136	0.122	0.096
FTR250-250	0.390	0.340	0.300	0.250	0.230	0.210	0.180	0.160	0.140	0.100
FTR250-400	0.580	0.528	0.468	0.400	0.364	0.340	0.308	0.272	0.244	0.192
FTR250-600	0.870	0.792	0.702	0.600	0.546	0.510	0.462	0.408	0.366	0.288
FTR250-800	1.160	1.056	0.936	0.800	0.728	0.680	0.616	0.544	0.488	0.384
FTR250-1000	1.550	1.370	1.190	1.000	0.910	0.820	0.730	0.640	0.550	0.410
FTR250-1500	2.400	2.100	1.800	1.500	1.365	1.300	1.150	1.020	0.880	0.660
FTR250-2000	3.100	2.740	2.380	2.000	1.820	1.640	1.460	1.280	1.100	0.820

## Dimensions

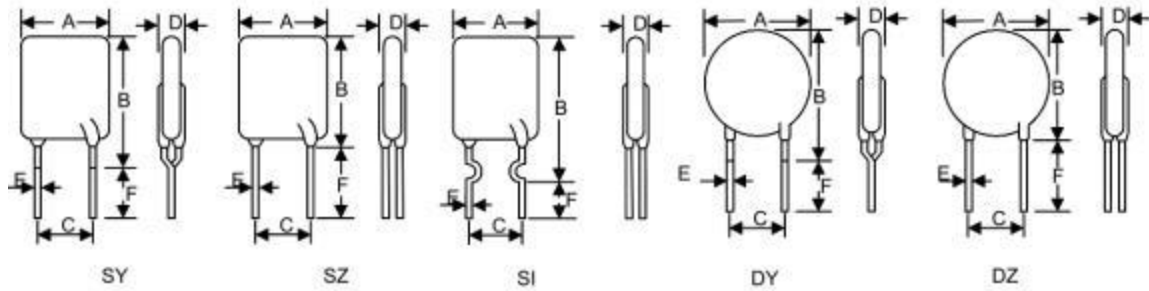


Part Number	Dimensions ( mm )						Style.
	A	B	C	D	E	F	
	Max.	Max.	$\pm 0.6$	Max.	Typ.	Min.	
FTR250-030	6.0	8.0	5.1	4.6	0.6	7.6	DZ
FTR250-040	7.4	13.5 / 12.7	5.1	4.6	0.6	4.6 / 7.6	DY / DZ
FTR250-060	7.4	14.5 / 12.7	5.1	4.6	0.6	4.6 / 7.6	DY / DZ
FTR250-080	7.4	14.5 / 12.7	5.1	4.6	0.6	4.6 / 7.6	DY / DZ
FTR250-090	7.4	14.5 / 12.7	5.1	4.6	0.6	4.6 / 7.6	DY / DZ
FTR250-110	7.0	14.5 / 10.5	5.1	4.6	0.6	4.6 / 7.6	SY / SZ
FTR250-120	7.0	14.5 / 10.5	5.1	4.6	0.6	4.6 / 7.6	SY / SZ
FTR250-145	7.5	15.0 / 11.0	5.1	4.6	0.6	4.6 / 7.6	SY / SZ
FTR250-180	10.5	18.5 / 14.5	5.1	4.6	0.6	4.6 / 7.6	SY/SZ/DZ
FTR250-200	10.5	18.5/17.0	5.1	4.6	0.6	7.6	SZ / DZ
FTR250-250	9.3	15.0/12.8	5.1	4.6	0.6	7.6	SY/SZ
FTR250-400	11.2	17.0/19.5	5.1	4.6	0.8/0.6	7.6	SZ/SI
FTR250-600	16.0	18.0	5.1	4.6	0.8	7.6	SZ
FTR250-800	20.0	22.0	5.1	4.6	0.8	7.6	SZ
FTR250-1000	21.1	23.6	10.2	4.6	0.8	7.6	DZ
FTR250-1500	21.0	27.5	10.2	4.6	0.8	7.6	SZ
FTR250-2000	26.2	32.8	10.2	4.6	0.8	7.6	SZ

## Marking Code

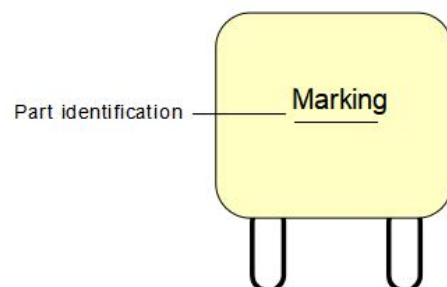

## Recommended Soldering Conditions

Wave Soldering Recommendation Parameters

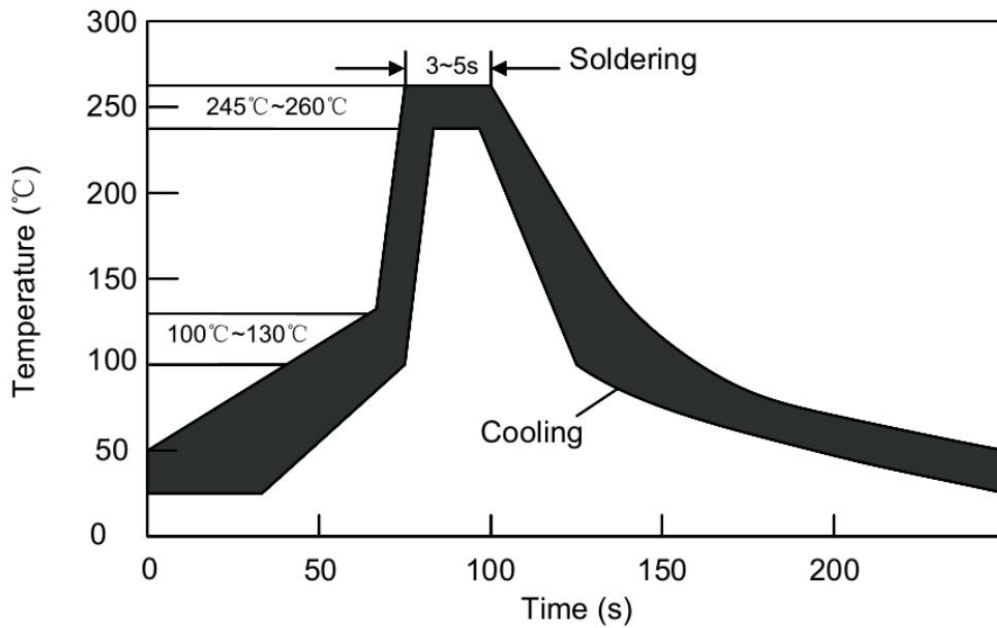


Items	Conditions
Pre-Heating Zone	Refer to the condition recommended by the flux manufacturer. Max. ramping rate should not exceed 4°C/Sec.
Soldering Zone	Max. solder temperature should not exceed 260°C Time within 5°C of actual Max. solder temperature within 3 - 5 seconds Total time from 25°C room to Max. solder temperature within 5 minutes including Pre-Heating time
Cooling Zone	Cooling by natural convection in air. Max. ramping down rate should not exceed 6°C/Sec.

Manual Soldering Recommendation Parameters

Items	Conditions
Soldering condition	The highest power of the manual soldering iron should be 30W or less, soldering temperature should not be higher than 280°C.
Soldering time	The soldering time should be kept within 3 seconds, otherwise it might cause insulation layer cracking, and increased part resistance.
Soldering position	The distance on the leads between the soldering point and bottom of the PPTC body should be equal or greater than 4mm.
Other	The soldering iron should not contact the PPTC body except the leads. If the soldering conditions are kept to lower temperature, less time and larger distance, the outcome of the soldering will be better.

## Partnumber code

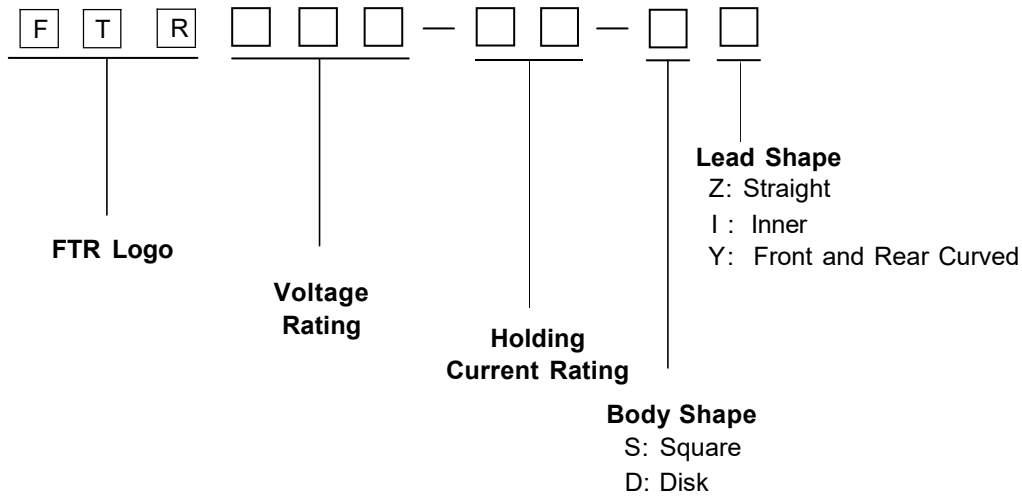



## Environmental Specifications

Operating / Storage temperature	-40°C to +85°C
Maximum Device Surface Temperature in Tripped State	125°C
Passive Aging	+85°C, 1000 hours ±5% typical resistance change
Humidity Aging	+85°C, 85%RH, 1000 hours ±5% typical resistance change
Thermal Shock	+85°C to -40°C 10 times 30% typical resistance change
Solvent Resistance	MIL-STD-202, Method 215 No change
Moisture Level Sensitivity	Level 1, J-STD-020

## Mechanical Specifications

Tensile strength	1.0Kgf, 10 seconds, No visible damage
Bending strength	0.5Kgf, 90°, 3 times, No visible damage
Vibration	Freq: 10-55Hz, Amp: 0.75mm, 1min; No visible damage

## Packaging

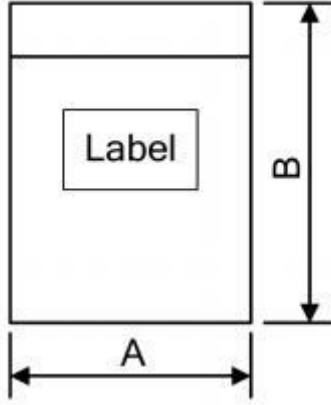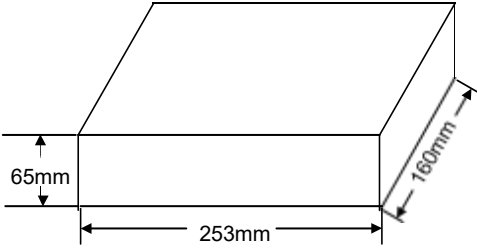Bag	Part Number	Dimension AxB (mm)	Quantity
	FTR250-030	120×150	1000pcs/bag 4000pcs/box
	FTR250-040		
	FTR250-060		
	FTR250-080		
	FTR250-090		
	FTR250-110		
<p data-bbox="156 853 280 882">Inner Box</p> 	FTR250-120	120×150	
	FTR250-145		
	FTR250-180		
	FTR250-200	120×150	500pcs/bag 2000pcs/box
	FTR250-250		
	FTR250-400		
	FTR250-600	150×200	
	FTR250-800		
	FTR250-1000		
	FTR250-1500	150×200	200pcs/bag 800pcs/box
	FTR250-2000		

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Resettable Fuses - PPTC](#) category:*

*Click to view products by [FTR](#) manufacturer:*

Other Similar products are found below :

[RF0077-000](#) [RF0627-000](#) [RF3301-000](#) [RF3382-000](#) [RF3394-000](#) [RF3399-000](#) [SMD125-2](#) [RF1973-000](#) [RF2531-000](#) [RF2873-000](#) [RF3060-000](#) [RF3311-000](#) [TR600-150Q-B-0.5-0.130](#) [RXE090](#) [5E4795/04-1502](#) [TRF250-080T-B-1.0-0.125](#) [SMD100-2](#) [NIS5431MT1TXG](#) [SMD250-2](#) [RS30-090](#) [RS30-600](#) [RS30-800](#) [RS30-900](#) [RS60RB-160](#) [RS60SB-250](#) [SB250-145](#) [K30U400](#) [0ZCH0110AF2E](#) [BK60-110-DI-E0.6](#) [BK250-120-SZ-E0.6](#) [BK60-010-DI-E0.5](#) [BK250-040-DY-E0.6](#) [RF2631-000](#) [NIS4461MT3TXG](#) [NIS5420MT2TXG](#) [NIS5420MT3TXG](#) [NIS6420MT1TWG](#) [RF5032-000](#) [RF5051-000](#) [RF5105-000](#) [RF5062-000](#) [RF5055-000](#) [RF5052-000](#) [2920L075/72MR](#) [BSMD0603-025-24V](#) [BSMD0402L-005](#) [BSMD0603-010-9V](#) [BSMD1812-020-60V](#) [BSMD2920-400-30V](#) [BSMD0603-010-12V](#)