

## Transient Voltage Suppressors (TVS) Data Sheet

### Features

- Glass passivated junction
- Low zener impedance
- Excellent clamping capability
- 200W peak pulse power capability at 10/1000 $\mu$ s waveform, repetition rate (duty cycle):0.01%
- Compatible with industrial standard package SOD-123FL
- Fast response time
- Typical  $I_R$  less than 1 $\mu$ A above 13V.
- Plastic package has underwriters laboratory flammability 94V-0
- IEC61000-4-2 ESD 30KV(air), 30KV(contact)
- Meets MSL level 1, per J-STD-020.

### Mechanical Data

- Case: JEDEC SOD-123FL Moulded plastic
- Terminal:solderplated, solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode except bi-directional models
- Mounting Position: Any

### Applications

- I/O interface
- Vcc BUS
- Low frequency signal transmission line (RS232, RS485, etc.)

### Maximum Ratings and Characteristics

Ratings at 25 $^{\circ}$ C ambient temperature unless otherwise specified.

Rating	Symbol	Value	Units
Peak pulse power dissipation at 10/1000 $\mu$ s waveform (Note1, Fig.1)	$P_{PPM}$	Minimum 200	Watts
Peak pulse current of at 10/1000 $\mu$ s waveform (Note 1, Fig.3)	$I_{PPM}$	See Table	Amps
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load, (JEDEC Method) (Note2)	$I_{FSM}$	20	Amps
Operating junction and Storage Temperature Range.	$T_J, T_{STG}$	-55 to +150	$^{\circ}$ C
Typical thermal resistance junction to lead	$R_{\theta JL}$	100	$^{\circ}$ C/W
Typical thermal resistance junction to ambient	$R_{\theta JA}$	220	$^{\circ}$ C/W

Notes: 1. Non-repetitive current pulse, per Fig.3 and derated above  $T_A=25^{\circ}$ C per Fig.2.

2. 8.3ms single half sine-wave, or equivalent square wave, duty cycle=4 pulses per minutes maximum.

The drawing shows three views of the component: a top view with dimensions A (total width), B (width of the central opening), and C (height of the side flange); a side view with dimensions D (height of the main body) and E (width of the base); and a perspective view with dimensions F (height of the main body) and G (height of the base). A separate diagram shows the 'Recommended Soldering Pad Layout' with dimensions: 1.00 (2X) for the pad width, 1.10 (2X) for the pad height, and 2.00 for the distance between pads.

Symbol	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	3.5	3.90	0.138	0.154
B	2.6	3.00	0.102	0.118
C	0.75	1.10	0.030	0.043
D	1.60	2.00	0.063	0.079
E	0.80Typ.		0.031tTyp.	
F	0.90	1.40	0.035	0.055
G	0.18	0.22	0.007	0.009

## Electrical Characteristics (T<sub>A</sub>=25°C)


Part Number		Device Marking Code		Reverse Stand-Off Voltage	Breakdown Voltage @I <sub>T</sub>	Test Current	Maximum Clamping Voltage @I <sub>PP</sub>	Peak Pulse Current	Reverse Leakage @V <sub>RWM</sub>
Unidirectional	Bidirectional	UNI	BI	V <sub>RWM</sub> (V)	V <sub>BR</sub> (V)	I <sub>T</sub> (mA)	V <sub>C</sub> (V)	I <sub>PP</sub> (A)	I <sub>R</sub> (μA)
SMF5.0A	SMF5.0CA	AE	WE	5.0	6.4~7.0	10	9.2	21.8	800
SMF6.0A	SMF6.0CA	AG	WG	6.0	6.7~7.4	10	10.3	19.4	800
SMF6.5A	SMF6.5CA	AK	WK	6.5	7.2~8.0	10	11.2	17.9	500
SMF7.0A	SMF7.0CA	AM	WM	7.0	7.8~8.6	10	12.0	16.7	200
SMF7.5A	SMF7.5CA	AP	WP	7.5	8.3~9.2	1	12.9	15.5	100
SMF8.0A	SMF8.0CA	AR	WR	8.0	8.9~9.8	1	13.6	14.7	50
SMF8.5A	SMF8.5CA	AT	WT	8.5	9.4~10.4	1	14.4	13.9	10
SMF9.0A	SMF9.0CA	AV	WV	9.0	10.0~11.0	1	15.4	13.0	5
SMF10A	SMF10CA	AX	WX	10.0	11.1~12.3	1	17.0	11.8	5
SMF11A	SMF11CA	AZ	WZ	11.0	12.2~13.5	1	18.2	11.0	1
SMF12A	SMF12CA	BE	XE	12.0	13.3~14.7	1	19.9	10.1	1
SMF13A	SMF13CA	BG	XG	13.0	14.4~15.9	1	21.5	9.3	1
SMF14A	SMF14CA	BK	XK	14.0	15.6~17.2	1	23.2	8.6	1
SMF15A	SMF15CA	BM	XM	15.0	16.7~18.5	1	24.4	8.2	1
SMF16A	SMF16CA	BP	XP	16.0	17.8~19.7	1	26.0	7.7	1
SMF17A	SMF17CA	BR	XR	17.0	18.9~20.9	1	27.6	7.3	1
SMF18A	SMF18CA	BT	XT	18.0	20.0~22.1	1	29.2	6.9	1
SMF20A	SMF20CA	BV	XV	20.0	22.2~24.5	1	32.4	6.2	1
SMF22A	SMF22CA	BX	XX	22.0	24.4~26.9	1	35.5	5.7	1
SMF24A	SMF24CA	BZ	XZ	24.0	26.7~29.5	1	38.9	5.2	1
SMF26A	SMF26CA	CE	YE	26.0	28.9~31.9	1	42.1	4.8	1

## Electrical Characteristics ( $T_A=25^\circ\text{C}$ )

Part Number		Device Marking Code		Reverse Stand-Off Voltage	Breakdown Voltage @ $I_T$	Test Current	Maximum Clamping Voltage @ $I_{PP}$	Peak Pulse Current	Reverse Leakage @ $V_{RWM}$
Unidirectional	Bidirectional	UNI	BI	$V_{RWM}(V)$	$V_{BR}(V)$	$I_T(mA)$	$V_C(V)$	$I_{PP}(A)$	$I_R(\mu A)$
SMF28A	SMF28CA	CG	YG	28.0	31.1~34.4	1	45.4	4.4	1
SMF30A	SMF30CA	CK	YK	30.0	33.3~36.8	1	48.4	4.2	1
SMF33A	SMF33CA	CM	YM	33.0	36.7~40.6	1	53.3	3.8	1
SMF36A	SMF36CA	CP	YP	36.0	40.0~44.2	1	58.1	3.5	1
SMF40A	SMF40CA	CR	YR	40.0	44.4~49.1	1	64.5	3.1	1
SMF43A	SMF43CA	CT	YT	43.0	47.8~52.8	1	69.4	2.9	1
SMF45A	SMF45CA	CV	YV	45.0	50.0~55.3	1	72.7	2.8	1
SMF48A	SMF48CA	CX	YX	48.0	53.3~58.9	1	77.4	2.6	1
SMF51A	SMF51CA	CZ	YZ	51.0	56.7~62.7	1	82.4	2.5	1
SMF54A	SMF54CA	RE	ZE	54.0	60.0~66.3	1	87.1	2.3	1
SMF58A	SMF58CA	RG	ZG	58.0	64.4~71.2	1	93.6	2.3	1
SMF60A	SMF60CA	RK	ZK	60.0	66.7~73.7	1	96.8	2.1	1
SMF64A	SMF64CA	RM	ZM	64.0	71.1~78.6	1	103.0	2.0	1
SMF70A	SMF70CA	RP	ZP	70.0	77.8~86.0	1	113.0	1.8	1
SMF75A	SMF75CA	RR	ZR	75.0	83.3~92.1	1	121.0	1.7	1
SMF78A	SMF78CA	RT	ZT	78.0	86.7~95.8	1	126.0	1.6	1
SMF85A	SMF85CA	RV	ZV	85.0	94.4~104	1	137.0	1.5	1
SMF90A	SMF90CA	RX	ZX	90.0	100~111	1	146.0	1.4	1
SMF100A	SMF100CA	RZ	ZZ	100.0	111~123	1	162.0	1.3	1
SMF110A	SMF110CA	SE	VE	110.0	122~135	1	177.0	1.2	1
SMF120A	SMF120CA	SG	VG	120.0	133~147	1	193.0	1.1	1
SMF130A	SMF130CA	SK	VK	130.0	144~159	1	209.0	1.0	1
SMF150A	SMF150CA	SM	VM	150.0	167~185	1	243.0	0.8	1
SMF160A	SMF160CA	SP	VP	160.0	178~197	1	259.0	0.8	1
SMF170A	SMF170CA	SR	VR	170.0	189~209	1	275.0	0.8	1
SMF180A	SMF180CA	ST	VT	180.0	201~222	1	292.0	0.7	1
SMF200A	SMF200CA	SV	VV	200.0	224~247	1	324.0	0.6	1

Notes: For bidirectional type having VRWM of 10V and less, the IR limit is double.


## Recommended Soldering Conditions

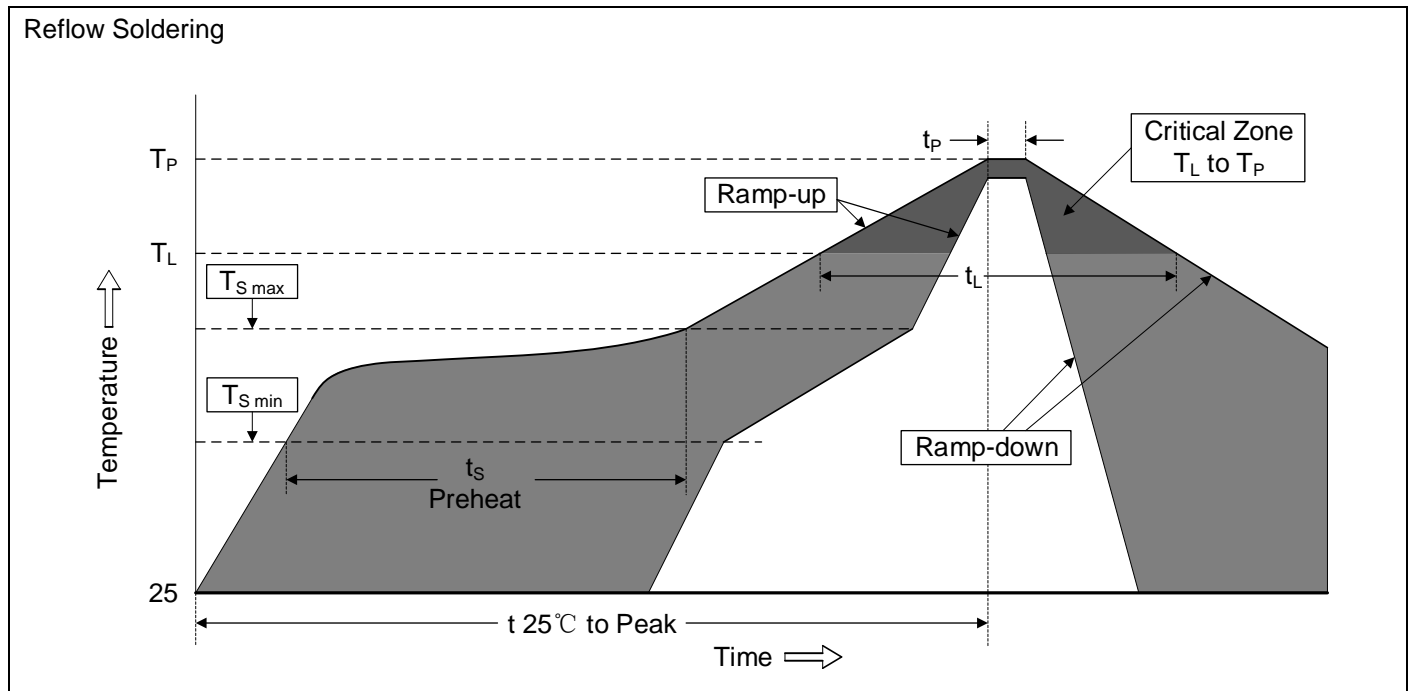

### Recommended Conditions

Profile Feature	Pb-Free Assembly
Average ramp-up rate ( $T_L$ to $T_P$ )	3°C/second max.
Preheat -Temperature Min ( $T_{S\ min}$ ) -Temperature Max ( $T_{S\ max}$ ) -Time (min to max) ( $t_s$ )	150°C 200°C 60-180 seconds
$T_{S\ max}$ to $T_L$ -Ramp-up Rate	3°C/second max.
Time maintained above: -Temperature ( $T_L$ ) -Time ( $t_L$ )	217°C 60-150 seconds
Peak Temperature ( $T_P$ )	260°C
Time within 5°C of actual Peak Temperature ( $t_P$ )	20-40 seconds
Ramp-down Rate	6°C/second max.
Time 25°C to Peak Temperature	8 minutes max.

## Partnumber code

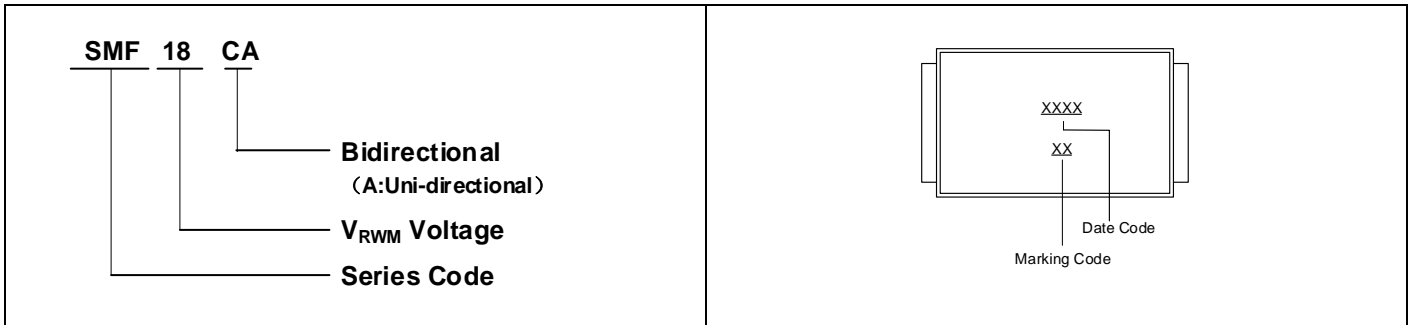

## Ratings and Characteristic Curves ( $T_A=25^\circ\text{C}$ unless otherwise noted)

Figure 1. Peak Pulse Power Rating Curve

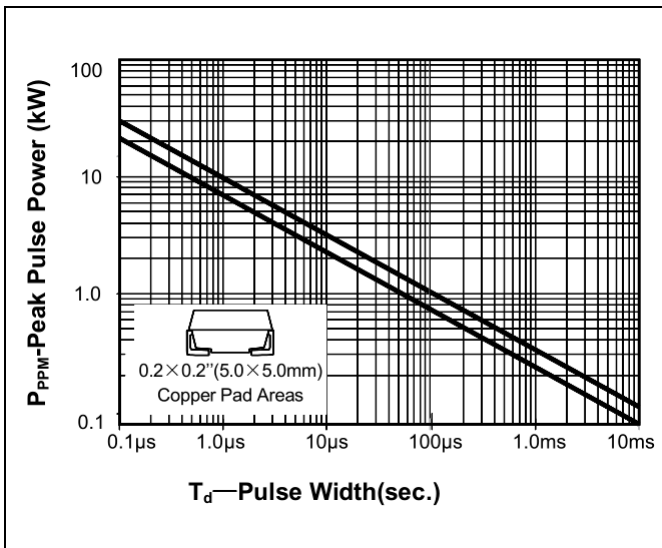


Figure 2. Pulse Derating Curve



Figure 3. Pulse Waveform


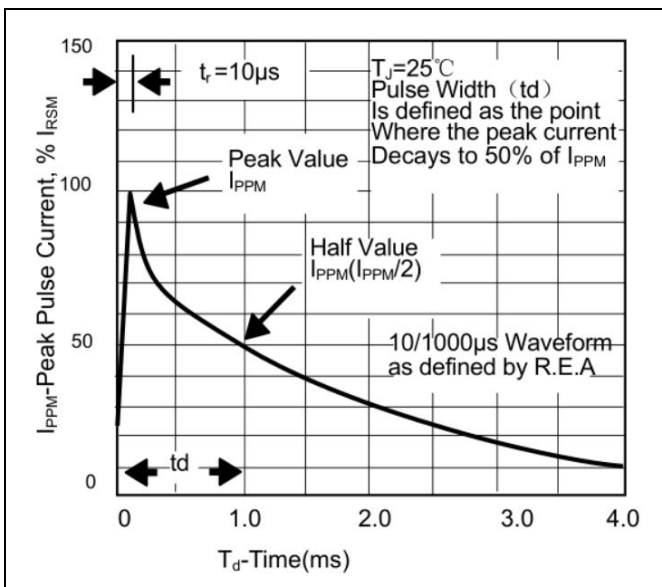


Figure 4. Typical Junction Capacitance

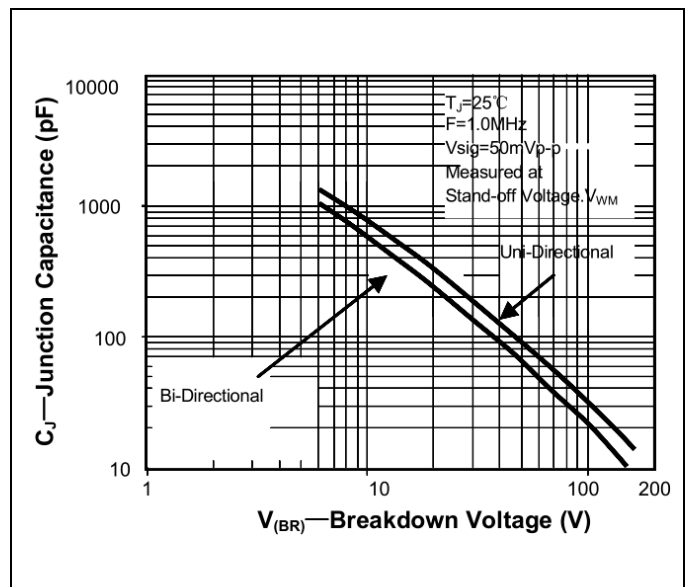

## Packaging

Tape		Symbol	Dimension (mm)
		W	8.00±0.30
		P0	4.00±0.10
		P1	4.00±0.10
		P2	2.00±0.10
		D0	Φ1.50±0.10
		D1	Φ1.00±0.05
		E	1.75±0.10
		F	3.50±0.10
		A	2.00±0.10
		B	3.95±0.10
		K	1.40±0.12
		T	0.23±0.10
		D5	Φ178.0±2.0
		D6	Φ13
W2	9.5		
Quantity: 3000pcs			
Reel			

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:*

*Click to view products by [FTR](#) manufacturer:*

Other Similar products are found below :

[NTE4902](#) [P4SMAJ15A](#) [P4SMAJ26A](#) [SMAJ400CA-TP](#) [TGL34-47CA](#) [ESDAULC45-1BF4](#) [SM1605E3/TR13](#) [SMF20A-TP](#) [P4SMAJ12A](#)  
[CPDUR24V-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [MPLAD30KP45CAE3](#) [MMBZ27VCLQ-7-F](#) [MMAD1108/TR13](#) [MPLAD30KP24A](#)  
[ACPDQC5V0R-HF](#) [DFLT170A-7](#) [NTE4900](#) [NTE4926](#) [NTE4938](#) [SMF22A-TP](#) [SMF12A-TP](#) [SLVU2.8-TP](#) [SMLJ6.5CA-TP](#) [SMAJ6.5CA-](#)  
[TP](#) [MMAD1108E3/TR13](#) [D5V0M1U2LP3-7](#) [SMAJ400A-TP](#) [AOZ8811DT-03](#) [AOZ8831DI-05](#) [AOZ8831DT-03](#) [SMAJ188CA](#) [3SMC33CA](#)  
[BK](#) [CPDQC3V3C-HF](#) [CPDQC12VE-HF](#) [MPLAD30KP170CA](#) [82357120100](#) [5.0SMLJ15CA-TP](#) [5KP18A-TP](#) [P6KE8.2A-TP](#)  
[MPLAD30KP43CAE3](#) [SMAJ43A-TP](#) [D5V0F6U8LP33-7](#) [TVS5501V10MUT5G](#) [5.0SMLJ24CA-TP](#) [SMAJ110CA-TP](#) [MPLAD15KP75CAE3](#)  
[MMAD1103e3/TR13](#) [DFLT40AQ-7](#)