

## Transient Voltage Suppressors (TVS) Data Sheet

### Features

- Glass passivated junction
- Low zener impedance
- Excellent clamping capability
- 200W peak pulse power capability at 10/1000 $\mu$ s waveform, repetition rate (duty cycle):0.01%
- Compatible with industrial standard package SOD-123FL
- Fast response time
- Typical  $I_R$  less than 1 $\mu$ A above 13V.
- Plastic package has underwriters laboratory flammability 94V-0
- IEC61000-4-2 ESD 30KV(air), 30KV(contact)
- Meets MSL level 1, per J-STD-020.

### Mechanical Data

- Case: JEDEC SOD-123FL Moulded plastic
- Terminal:solderplated, solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode except bi-directional models
- Mounting Position: Any

### Applications

- I/O interface
- Vcc BUS
- Low frequency signal transmission line (RS232, RS485, etc.)

### Maximum Ratings and Characteristics

Ratings at 25 $^{\circ}$ C ambient temperature unless otherwise specified.

Rating	Symbol	Value	Units
Peak pulse power dissipation at 10/1000 $\mu$ s waveform (Note1, Fig.1)	$P_{PPM}$	Minimum 200	Watts
Peak pulse current of at 10/1000 $\mu$ s waveform (Note 1, Fig.3)	$I_{PPM}$	See Table	Amps
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load, (JEDEC Method) (Note2)	$I_{FSM}$	20	Amps
Operating junction and Storage Temperature Range.	$T_J, T_{STG}$	-55 to +150	$^{\circ}$ C
Typical thermal resistance junction to lead	$R_{\theta JL}$	100	$^{\circ}$ C/W
Typical thermal resistance junction to ambient	$R_{\theta JA}$	220	$^{\circ}$ C/W

Notes: 1. Non-repetitive current pulse, per Fig.3 and derated above  $T_A=25^{\circ}$ C per Fig.2.

2. 8.3ms single half sine-wave, or equivalent square wave, duty cycle=4 pulses per minutes maximum.

The drawing shows three views of the component: a top view with dimensions A (total width), B (width of the central opening), and C (height of the central opening); a side view with dimensions D (height) and E (width of the side flange); and a perspective view with dimensions F (height of the top flange) and G (height of the bottom flange). A separate diagram shows the 'Recommended Soldering Pad Layout' with dimensions 1.00 (2X) for the pad width, 1.10 (2X) for the pad height, and 2.00 for the distance between pads.

Symbol	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	3.5	3.90	0.138	0.154
B	2.6	3.00	0.102	0.118
C	0.75	1.10	0.030	0.043
D	1.60	2.00	0.063	0.079
E	0.80Typ.		0.031tTyp.	
F	0.90	1.40	0.035	0.055
G	0.18	0.22	0.007	0.009

## Electrical Characteristics ( $T_A=25^{\circ}\text{C}$ )


Part Number		Device Marking Code		Reverse Stand-Off Voltage	Breakdown Voltage @ $I_T$	Test Current	Maximum Clamping Voltage @ $I_{PP}$	Peak Pulse Current	Reverse Leakage @ $V_{RWM}$
Unidirectional	Bidirectional	UNI	BI	$V_{RWM}(V)$	$V_{BR}(V)$	$I_T(mA)$	$V_C(V)$	$I_{PP}(A)$	$I_R(\mu A)$
SMF5.0A	SMF5.0CA	AE	WE	5.0	6.4~7.0	10	9.2	21.8	800
SMF6.0A	SMF6.0CA	AG	WG	6.0	6.7~7.4	10	10.3	19.4	800
SMF6.5A	SMF6.5CA	AK	WK	6.5	7.2~8.0	10	11.2	17.9	500
SMF7.0A	SMF7.0CA	AM	WM	7.0	7.8~8.6	10	12.0	16.7	200
SMF7.5A	SMF7.5CA	AP	WP	7.5	8.3~9.2	1	12.9	15.5	100
SMF8.0A	SMF8.0CA	AR	WR	8.0	8.9~9.8	1	13.6	14.7	50
SMF8.5A	SMF8.5CA	AT	WT	8.5	9.4~10.4	1	14.4	13.9	10
SMF9.0A	SMF9.0CA	AV	WV	9.0	10.0~11.0	1	15.4	13.0	5
SMF10A	SMF10CA	AX	WX	10.0	11.1~12.3	1	17.0	11.8	5
SMF11A	SMF11CA	AZ	WZ	11.0	12.2~13.5	1	18.2	11.0	1
SMF12A	SMF12CA	BE	XE	12.0	13.3~14.7	1	19.9	10.1	1
SMF13A	SMF13CA	BG	XG	13.0	14.4~15.9	1	21.5	9.3	1
SMF14A	SMF14CA	BK	XK	14.0	15.6~17.2	1	23.2	8.6	1
SMF15A	SMF15CA	BM	XM	15.0	16.7~18.5	1	24.4	8.2	1
SMF16A	SMF16CA	BP	XP	16.0	17.8~19.7	1	26.0	7.7	1
SMF17A	SMF17CA	BR	XR	17.0	18.9~20.9	1	27.6	7.3	1
SMF18A	SMF18CA	BT	XT	18.0	20.0~22.1	1	29.2	6.9	1
SMF20A	SMF20CA	BV	XV	20.0	22.2~24.5	1	32.4	6.2	1
SMF22A	SMF22CA	BX	XX	22.0	24.4~26.9	1	35.5	5.7	1
SMF24A	SMF24CA	BZ	XZ	24.0	26.7~29.5	1	38.9	5.2	1
SMF26A	SMF26CA	CE	YE	26.0	28.9~31.9	1	42.1	4.8	1

## Electrical Characteristics ( $T_A=25^\circ\text{C}$ )

Part Number		Device Marking Code		Reverse Stand-Off Voltage	Breakdown Voltage @ $I_T$	Test Current	Maximum Clamping Voltage @ $I_{PP}$	Peak Pulse Current	Reverse Leakage @ $V_{RWM}$
Unidirectional	Bidirectional	UNI	BI	$V_{RWM}(V)$	$V_{BR}(V)$	$I_T(mA)$	$V_C(V)$	$I_{PP}(A)$	$I_R(\mu A)$
SMF28A	SMF28CA	CG	YG	28.0	31.1~34.4	1	45.4	4.4	1
SMF30A	SMF30CA	CK	YK	30.0	33.3~36.8	1	48.4	4.2	1
SMF33A	SMF33CA	CM	YM	33.0	36.7~40.6	1	53.3	3.8	1
SMF36A	SMF36CA	CP	YP	36.0	40.0~44.2	1	58.1	3.5	1
SMF40A	SMF40CA	CR	YR	40.0	44.4~49.1	1	64.5	3.1	1
SMF43A	SMF43CA	CT	YT	43.0	47.8~52.8	1	69.4	2.9	1
SMF45A	SMF45CA	CV	YV	45.0	50.0~55.3	1	72.7	2.8	1
SMF48A	SMF48CA	CX	YX	48.0	53.3~58.9	1	77.4	2.6	1
SMF51A	SMF51CA	CZ	YZ	51.0	56.7~62.7	1	82.4	2.5	1
SMF54A	SMF54CA	RE	ZE	54.0	60.0~66.3	1	87.1	2.3	1
SMF58A	SMF58CA	RG	ZG	58.0	64.4~71.2	1	93.6	2.3	1
SMF60A	SMF60CA	RK	ZK	60.0	66.7~73.7	1	96.8	2.1	1
SMF64A	SMF64CA	RM	ZM	64.0	71.1~78.6	1	103.0	2.0	1
SMF70A	SMF70CA	RP	ZP	70.0	77.8~86.0	1	113.0	1.8	1
SMF75A	SMF75CA	RR	ZR	75.0	83.3~92.1	1	121.0	1.7	1
SMF78A	SMF78CA	RT	ZT	78.0	86.7~95.8	1	126.0	1.6	1
SMF85A	SMF85CA	RV	ZV	85.0	94.4~104	1	137.0	1.5	1
SMF90A	SMF90CA	RX	ZX	90.0	100~111	1	146.0	1.4	1
SMF100A	SMF100CA	RZ	ZZ	100.0	111~123	1	162.0	1.3	1
SMF110A	SMF110CA	SE	VE	110.0	122~135	1	177.0	1.2	1
SMF120A	SMF120CA	SG	VG	120.0	133~147	1	193.0	1.1	1
SMF130A	SMF130CA	SK	VK	130.0	144~159	1	209.0	1.0	1
SMF150A	SMF150CA	SM	VM	150.0	167~185	1	243.0	0.8	1
SMF160A	SMF160CA	SP	VP	160.0	178~197	1	259.0	0.8	1
SMF170A	SMF170CA	SR	VR	170.0	189~209	1	275.0	0.8	1
SMF180A	SMF180CA	ST	VT	180.0	201~222	1	292.0	0.7	1
SMF200A	SMF200CA	SV	VV	200.0	224~247	1	324.0	0.6	1

Notes: For bidirectional type having VRWM of 10V and less, the IR limit is double.


## Recommended Soldering Conditions

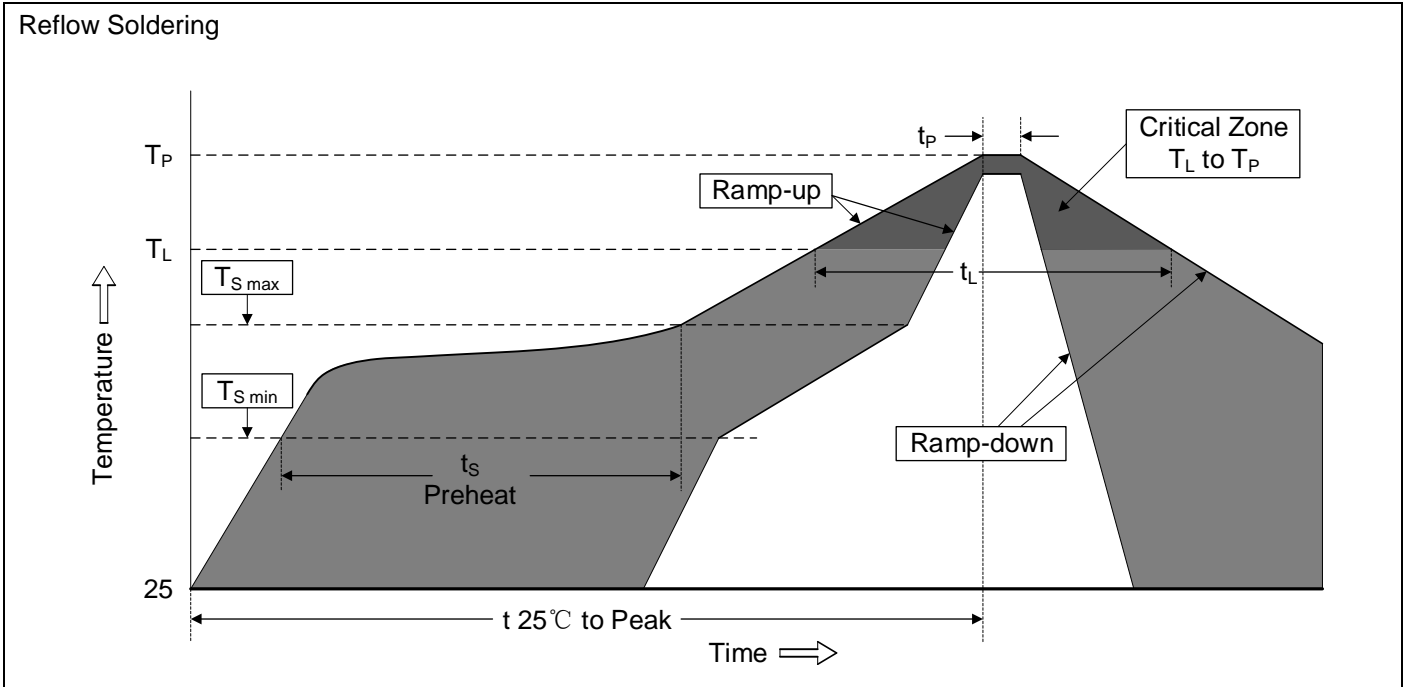

### Recommended Conditions

Profile Feature	Pb-Free Assembly
Average ramp-up rate ( $T_L$ to $T_P$ )	3°C/second max.
Preheat -Temperature Min ( $T_{S\ min}$ ) -Temperature Max ( $T_{S\ max}$ ) -Time (min to max) ( $t_S$ )	150°C 200°C 60-180 seconds
$T_{S\ max}$ to $T_L$ -Ramp-up Rate	3°C/second max.
Time maintained above: -Temperature ( $T_L$ ) -Time ( $t_L$ )	217°C 60-150 seconds
Peak Temperature ( $T_P$ )	260°C
Time within 5°C of actual Peak Temperature ( $t_P$ )	20-40 seconds
Ramp-down Rate	6°C/second max.
Time 25°C to Peak Temperature	8 minutes max.

## Partnumber code

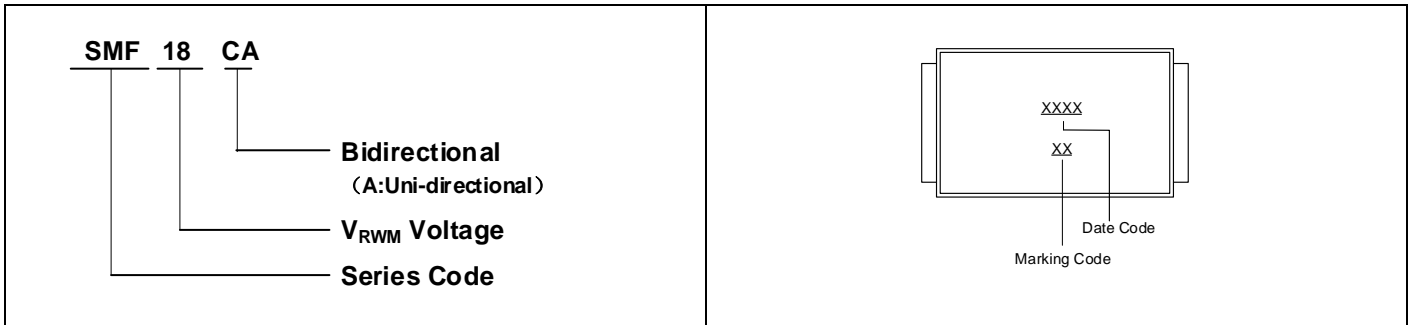

## Ratings and Characteristic Curves ( $T_A=25^\circ\text{C}$ unless otherwise noted)

Figure 1. Peak Pulse Power Rating Curve

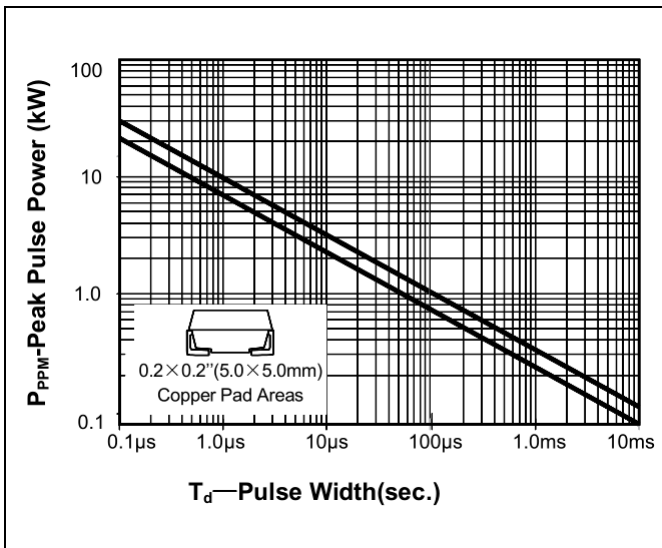


Figure 2. Pulse Derating Curve

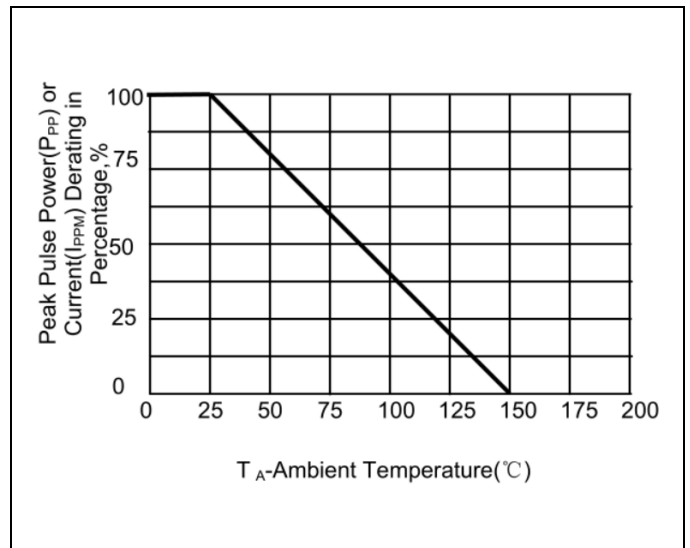


Figure 3. Pulse Waveform




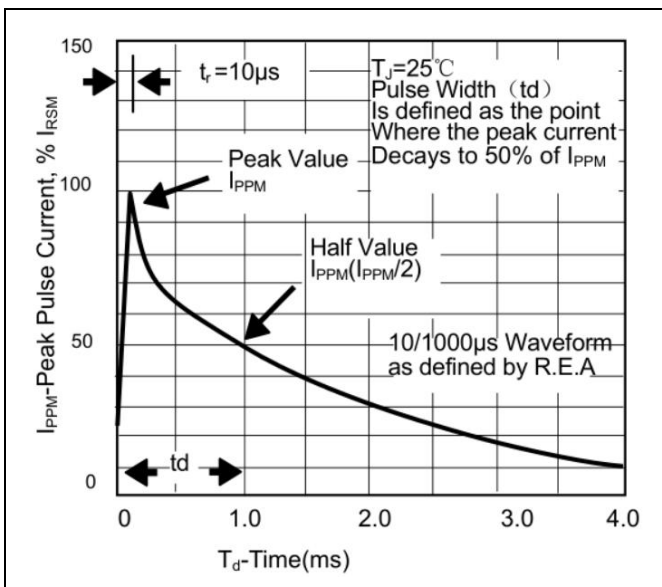


Figure 4. Typical Junction Capacitance

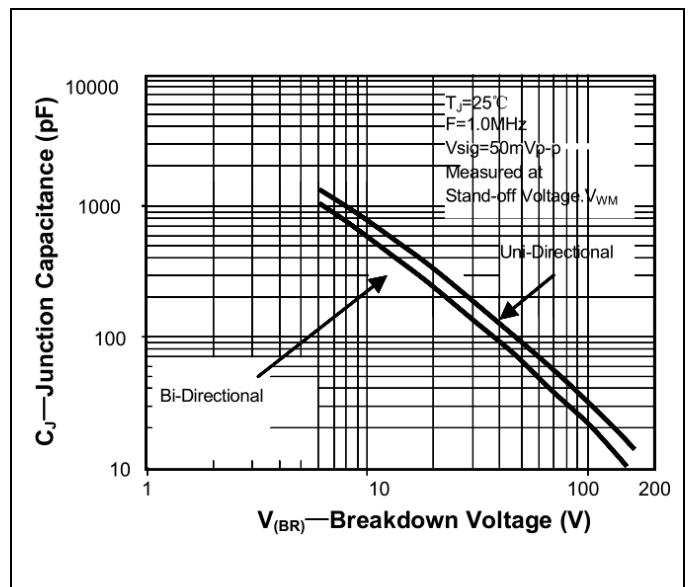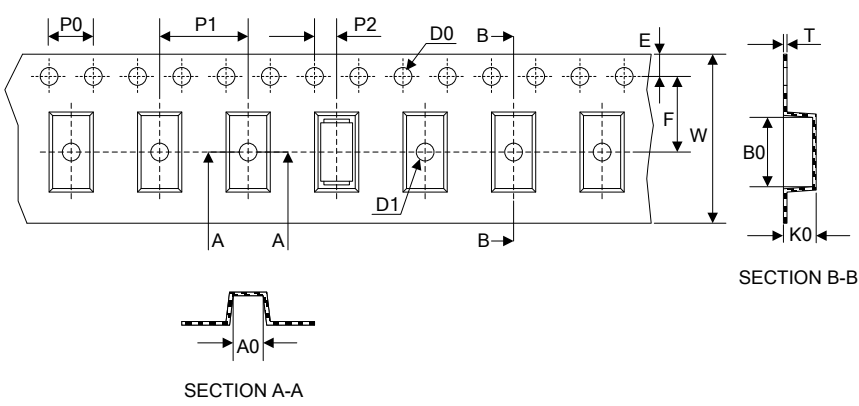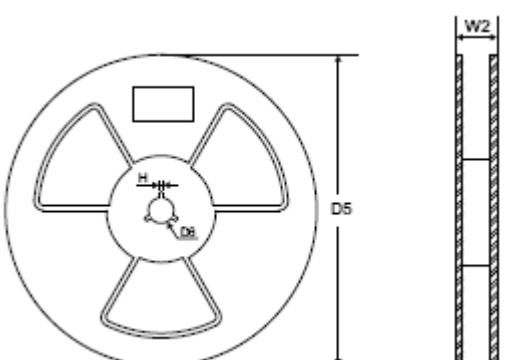

## Packaging

Tape		Symbol	Dimension (mm)
		W	8.00±0.30
		P0	4.00±0.10
		P1	4.00±0.10
		P2	2.00±0.10
		D0	Φ1.50±0.10
		D1	Φ1.00±0.05
		E	1.75±0.10
		F	3.50±0.10
		A	2.00±0.10
		B	3.95±0.10
K	1.40±0.12		
T	0.23±0.10		
		D5	Φ178.0±2.0
		D6	Φ13
		W2	9.5
		Quantity: 3000pcs	

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:*

*Click to view products by [FTR](#) manufacturer:*

Other Similar products are found below :

[NTE4902](#) [P4SMAJ15A](#) [P4SMAJ26A](#) [SMAJ400CA-TP](#) [TGL34-47CA](#) [ESDAULC45-1BF4](#) [SM1605E3/TR13](#) [SMF20A-TP](#) [P4SMAJ12A](#)  
[CPDUR24V-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [MPLAD30KP45CAE3](#) [MMBZ27VCLQ-7-F](#) [MMAD1108/TR13](#) [MPLAD30KP24A](#)  
[ACPDQC5V0R-HF](#) [DFLT170A-7](#) [NTE4900](#) [NTE4926](#) [NTE4938](#) [SMF22A-TP](#) [SMF12A-TP](#) [SLVU2.8-TP](#) [SMLJ6.5CA-TP](#) [SMAJ6.5CA-](#)  
[TP](#) [MMAD1108E3/TR13](#) [D5V0M1U2LP3-7](#) [SMAJ400A-TP](#) [AOZ8811DT-03](#) [AOZ8831DI-05](#) [AOZ8831DT-03](#) [SMAJ188CA](#) [3SMC33CA](#)  
[BK](#) [CPDQC3V3C-HF](#) [CPDQC12VE-HF](#) [MPLAD30KP170CA](#) [82357120100](#) [5.0SMLJ15CA-TP](#) [5KP18A-TP](#) [P6KE8.2A-TP](#)  
[MPLAD30KP43CAE3](#) [SMAJ43A-TP](#) [D5V0F6U8LP33-7](#) [TVS5501V10MUT5G](#) [5.0SMLJ24CA-TP](#) [SMAJ110CA-TP](#) [MPLAD15KP75CAE3](#)  
[MMAD1103e3/TR13](#) [DFLT40AQ-7](#)