

# POWER RELAY

## 1 POLE - 10A Low Profile Type

### FTR-H1 Series

#### ■ FEATURES

- Working class: B (for IMQ)/ C (for VDE)
- Type of service: continuous duty
- Low profile (height 16.5 mm)
- 1 form A/ 1 form C 10 A, TV-5 rating available
- Transparency cover type available
- UL class B (130°C) wire class
- High insulation in small package  
Insulation distance : 8 mm (between coil and contacts)  
Dielectric strength : 5,000 VAC  
Surge strength : 10,000 V
- Plastic materials - UL94 flame class V-0  
UL CTI level class 2
- Plastic sealed relay, RT III
- Pin configuration compatible to VS / FBR610 series
- UL, CSA, BSI, VDE, SEMKO recognized
- Conforms to FIMKO, DEMKO
- RoHS compliant  
Please see page 6 for more information



#### ■ PARTNUMBER INFORMATION

[Example]      FTR-H1   A   A   005   V - RG  
                   (a)   (b)   (c)   (d)   (e)   (f)

(a)	Relay type	FTR-H1: FTR-H1 Series
(b)	Contact configuration	A : 1 form A (SPST-NO) C : 1 form C (SPDT)
(c)	Coil type	A : Standard type (530mW) D : High sensitive type (400mW - V type only)
(d)	Coil rated voltage	005 : 5...48VDC Coil rating table at page 3
(e)	Contact material / TV type	V : Gold plate silver tin oxide (standard type) T : Gold plate silver tin oxide (TV-5 rating type, 1 form A standard)
(f)	Special type	RG : Transparent cover type

Actual marking does not carry the type name : "FTR"

E.g.: Ordering code: FTR-H1AA005V

Actual marking: H1AA005V

## ■ SPECIFICATION

Item			FTR-H1 (AC) A ( )	FTR-H1 AA ( ) T	FTR-H1 (AC) D ( ) V
Contact Data	Configuration		1 form A (SPST-NO) 1 form C (SPDT)	1 form A (SPST-NO)	1 form A (SPST-NO) 1 form C (SPDT)
	Construction		Single		
	Material		Movable: gold plate silver tin oxide, stationary: silver tin oxide		
	Resistance (initial)		Max. 100mOhm at 1A, 6VDC		
	Contact rating		10A, 250VAC, 30VDC		
	Max. carrying current		14A		
	Max. switching voltage		400VAC, 300VDC		
	Max. switching power		2,500VA, 300W		
	Min. switching load*		10 mA, 5VDC		
Life	Mechanical		Min. 20 x 10 <sup>6</sup> operations		
	Electrical	AC load	Min. 100 x 10 <sup>3</sup> operations		
		DC load	Min. 100 x 10 <sup>3</sup> operations		
		Lamp load (TV-5)	-	Min. 25 x 10 <sup>3</sup> operations	-
Coil Data	Rated power		530 mW		400 mW
	Operate power		260 mW		230 mW
	Operating temperature range		-40 °C to +75 °C (no frost) (refer to characteristic data) -40 °C to +70 °C (transparent cover -RG type)		
Timing Data	Operate (at nominal voltage)		Max. 10ms (without bounce)		
	Release (at nominal voltage)		Max. 5ms (no diode)		
Insulation	Resistance (initial)		Min. 1,000MOhm at 500VDC		
	Dielectric strength	Open contacts	1,000VAC (50/60Hz) 1min		
		Contacts to coil	5,000VAC (50/60Hz) 1min		
	Surge strength	Coil to contacts	10,000V / 1.2 x 50µs standard wave		
	Clearance		8mm		
	Creepage		8mm		
	EN61810-1, VDE0435	Voltage	250V		
		Pollution degree	3		
		Material group	IIIa		
		Category	C / 250V		
Other	Vibration resistance	Misoperation	10 to 55Hz double amplitude 1.65mm		
		Endurance	10 to 55Hz double amplitude 3.3mm		
	Shock	Misoperation	Min. 100m/s <sup>2</sup> (11±1ms)		
		Endurance	Min. 1,000m/s <sup>2</sup> (6±1ms)		
	Weight		Approximately 12g		
	Sealing		Sealed RT III		

\* Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

## ■ COIL RATING

Standard type (530 mW)

Coil Code	Rated Coil Voltage (VDC)	Coil Resistance +/- 10% (Ohm)	Must Operate Voltage (VDC) *	Must Release-Voltage (VDC) *	Max. Coil Voltage (VDC)	Rated Power (mW)
005	5	47	3.5	0.5	8.2	530
006	6	68	4.2	0.6	9.9	
009	9	155	6.3	0.9	14.8	
012	12	270	8.4	1.2	19.8	
024	24	1,100	16.8	2.4	39.6	
048	48	4,400	33.6	4.8	79.2	

High sensitive type (400 mW)

Coil Code	Rated Coil Voltage (VDC)	Coil Resistance +/- 10% (Ohm)	Must Operate Voltage (VDC) *	Must Release-Voltage (VDC) *	Max. Coil Voltage (VDC)	Rated Power (mW)
005	5	62	3.75	0.5	9.7	400
006	6	90	4.5	0.6	11.7	
009	9	202	6.75	0.9	17.5	
012	12	360	9	1.2	23.4	
024	24	1,440	18	2.4	46.8	
048	48	5,760	36	4.8	93.6	

Note: All values in the table are valid for 20°C and zero contact current.






\* Specified operate values are valid for pulse wave voltage.

## ■ SAFETY STANDARDS

Type	Compliance	Contact rating
UL	UL 508	Flammability: UL 94-V0 (plastics)
	E63614	10A, 30 VAC (resistive) 10A, 250 VAC (resistive)
CSA	C22.2 No. 14	12A, 250VAC (resistive)
	LR 40304	1/3 HP, 125VAC 1/2 HP, 125VAC Pilot duty: B300 TV-5 (only T type)
VDE	0435, 0631, 0700, 0860	10A, 250 VAC (cosφ=1), 3A, 250 VAC (cosφ=0.4) 10 250 VAC (0ms)
	40015054	5/80A, 250 VAC (T type)


Complies with SEMKO, BSI, CQC, NEMKO, DEMKO, FIMKO

## CHARACTERISTIC DATA

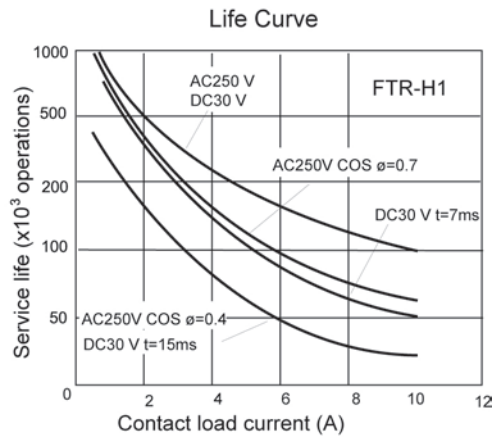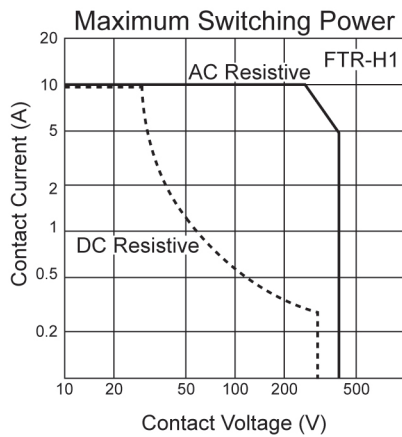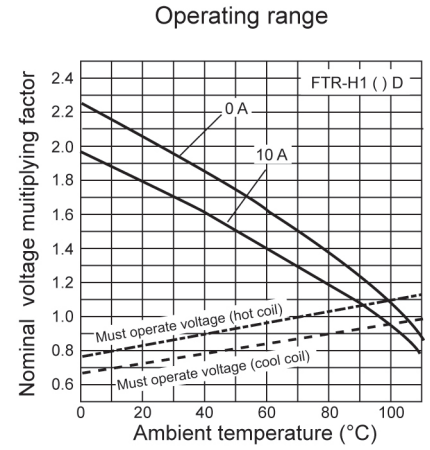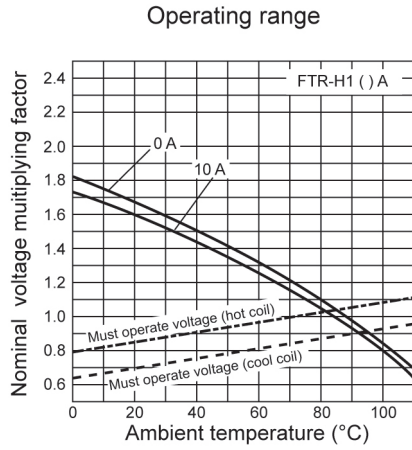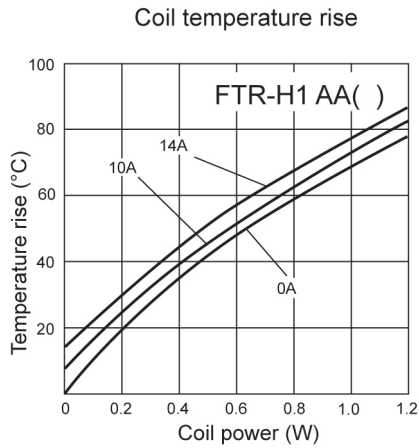

## REFERENCE DATA


Distribution of operate and release voltage

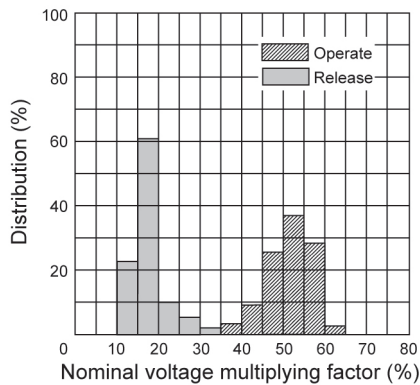


## ■ DIMENSIONS

### ● Dimensions


FTR-H1C type

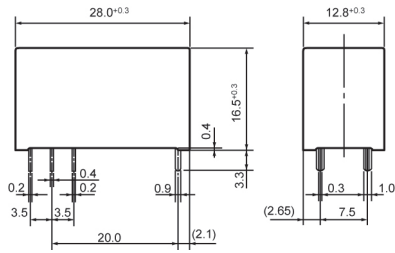




FTR-H1A type

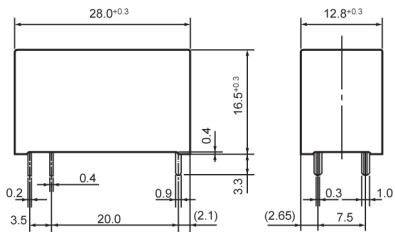

### ● Schematics (BOTTOM VIEW)



### ■ PC board mounting hole layout (BOTTOM VIEW)



Unit: mm

## RoHS Compliance and Lead Free Information

### 1. General Information

- All signal and power relays produced by Fujitsu Components are compliant with RoHS directive 2002/95/EC including amendments.
- Cadmium as used in electrical contacts is exempted from the RoHS directives on October 21st, 2005. (Amendment to Directive 2002/95/EC)
- All of our signal and power relays are lead-free. Please refer to Lead-Free Status Info for older date codes at: <http://www.fujitsu.com/us/downloads/MICRO/fcai/relays/lead-free-letter.pdf>
- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.

### 2. Recommended Lead Free Solder Profile

- Recommended solder Sn-3.0Ag-0.5Cu.

**Flow Solder condition:**

Pre-heating: maximum 120°C  
Soldering: dip within 5 sec. at  
260°C solder bath

**Solder by Soldering Iron:**

Soldering Iron  
Temperature: maximum 360°C  
Duration: maximum 3 sec.

**We highly recommend that you confirm your actual solder conditions**

### 3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

### 4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

**Fujitsu Components International Headquarter Offices****Japan**

Fujitsu Component Limited  
 Gotanda-Chuo Building  
 3-5, Higashigotanda 2-chome, Shinagawa-ku  
 Tokyo 141, Japan  
 Tel: (81-3) 5449-7010  
 Fax: (81-3) 5449-2626  
 Email: [promothq@ft.ed.fujitsu.com](mailto:promothq@ft.ed.fujitsu.com)  
 Web: [www.fcl.fujitsu.com](http://www.fcl.fujitsu.com)

**North and South America**

Fujitsu Components America, Inc.  
 250 E. Caribbean Drive  
 Sunnyvale, CA 94089 U.S.A.  
 Tel: (1-408) 745-4900  
 Fax: (1-408) 745-4970  
 Email: [components@us.fujitsu.com](mailto:components@us.fujitsu.com)  
 Web: <http://us.fujitsu.com/components>

**Europe**

Fujitsu Components Europe B.V.  
 Diamantlaan 25  
 2132 WV Hoofddorp  
 Netherlands  
 Tel: (31-23) 5560910  
 Fax: (31-23) 5560950  
 Email: [info@fceu.fujitsu.com](mailto:info@fceu.fujitsu.com)  
 Web: [emea.fujitsu.com/components/](http://emea.fujitsu.com/components/)

**Asia Pacific**

Fujitsu Components Asia Ltd.  
 102E Pasir Panjang Road  
 #01-01 Citilink Warehouse Complex  
 Singapore 118529  
 Tel: (65) 6375-8560  
 Fax: (65) 6273-3021  
 Email: [fcal@fcal.fujitsu.com](mailto:fcal@fcal.fujitsu.com)  
 Web: <http://www.fujitsu.com/sg/services/micro/components/>

©2010 Fujitsu Components Europe B.V. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

The contents, data and information in this datasheet are provided by Fujitsu Component Ltd. as a service only to its user and only for general information purposes.

The use of the contents, data and information provided in this datasheet is at the users' own risk.

Fujitsu has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

Fujitsu Components Europe B.V. and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof.

Nor do Fujitsu Components Europe B.V. and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability for any representation or warrant of any kind, express or implied, including warranties of any kind for merchantability or fitness for particular use, with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. July 22, 2010

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [General Purpose Relays](#) category:*

*Click to view products by [Fujitsu](#) manufacturer:*

Other Similar products are found below :

[PCN-105D3MH,000](#) [59641F200](#) [LY1SAC110120](#) [5X827E](#) [5X837F](#) [5X840F](#) [5X842F](#) [5X848E](#) [LY2N-AC120](#) [LY2S-AC220/240](#) [LY2-US-AC120](#) [LY3-US-AC120](#) [LY4F-UA-DC12](#) [LY4F-UA-DC24](#) [LY4F-US-AC120](#) [LY4F-US-AC240](#) [LY4F-US-DC24](#) [LY4F-VD-AC110](#) [LYQ20DC12](#) [M115C60](#) [M115N010](#) [M115N0150](#) [6031007G](#) [603-12D](#) [61211T0B4](#) [61212T400](#) [61222Q400](#) [61243B600](#) [61243C500](#) [61243Q400](#) [61311BOA2](#) [61311BOA6](#) [61311BOA8](#) [61311C0A2](#) [61311COA1](#) [61311COA6](#) [61311F0A2](#) [61311QOA1](#) [61311QOA4](#) [61311T0D6](#) [61311TOA6](#) [61311TOA7](#) [61311TOB3](#) [61311TOB4](#) [61311U0A6](#) [61312Q600](#) [61312T400](#) [61312T600](#) [61313U200](#) [61313U400](#)