

### Features

- For use in low voltage, high frequency inverters
- Free wheeling, and polarity protection applications


### Mechanical data

- **Case:** JEDEC SOD-323 molded plastic body
- **Terminals:** Solder plated, solderable per MIL-STD-750, Method 2026
- **Polarity:** Color band denotes cathode end
- **Mounting Position:** Any

### Marking : SL



### Package outline

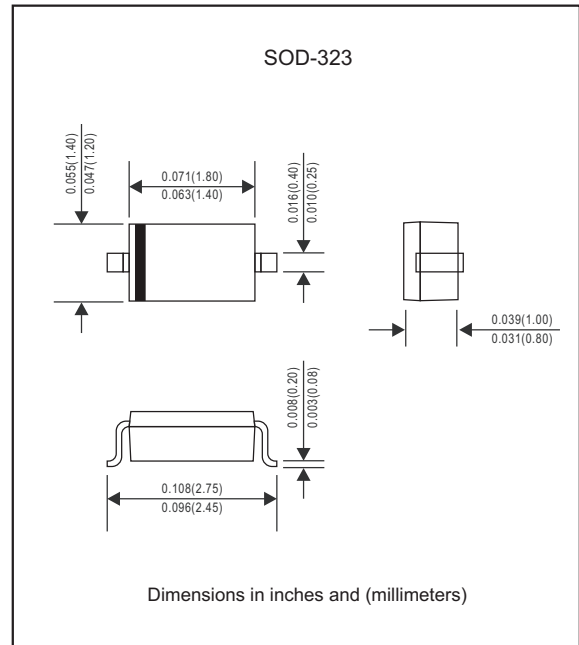


### Maximum ratings and Electrical Characteristics (AT $T_A=25^{\circ}\text{C}$ unless otherwise noted)

PARAMETER	SYMBOLS	B5817WS	B5818WS	B5819WS	UNITS
Peak repetitive peak reverse voltage	$V_{RRM}$				
Working peak	$V_{RWM}$	20	30	40	V
DC Blocking voltage	$V_R$				
RMS Reverse voltage	$V_{R(RMS)}$	14	21	28	V
Average rectified output current	$I_o$		1		A
Peak forward surge current @=8.3ms	$I_{FSM}$		9		A
Power dissipation	$P_d$		250		mW
Thermal resistance junction to ambient	$R_{\theta JA}$		500		K/W
Operating junction temperature range	$T_J$		-55 to +150		$^{\circ}\text{C}$
Storage temperature	$T_{STG}$		-55 to +150		
Non-Repetitive peak reverse voltage	$V_{RM}$	20	30	40	V


PARAMETER	SYMBOLS	Min.	Max.	Unit	Test conditions	
Reverse breakdown voltage	$V_{(BR)}$	20		V	$I_R=1\text{mA}$ B5817WS B5818WS B5819WS	
		30		V		
		40		V		
Reverse voltage leakage current	$I_R$		1	mA	$V_R=20\text{V}$ B5817WS	
					$V_R=30\text{V}$ B5818WS	
					$V_R=40\text{V}$ B5819WS	
Forward voltage	$V_F$		0.45 0.75	V	$I_F=1\text{A}$ $I_F=3\text{A}$ B5817WS B5818WS B5819WS	
			0.55 0.875			
			0.6 0.9			
Diode capacitance	$C_D$		120	pF	$V_R=4\text{V}, f=1.0\text{MHz}$	

**Rating and characteristic curves**


**FIG. 1- FORWARD CURRENT DERATING CURVE**

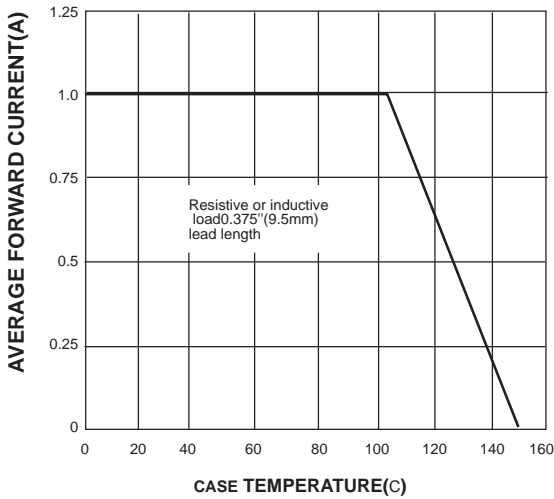


**FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

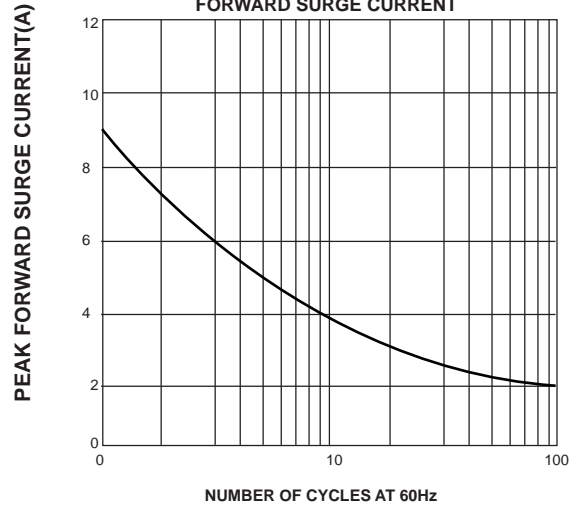


**FIG. 3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS**

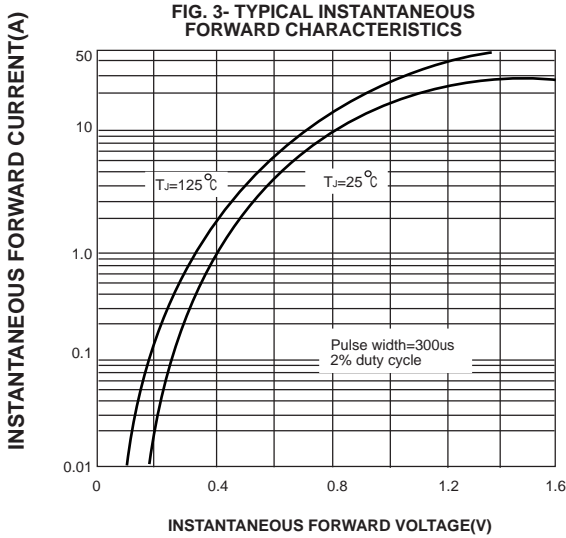


**FIG. 4- TYPICAL REVERSE CHARACTERISTICS**

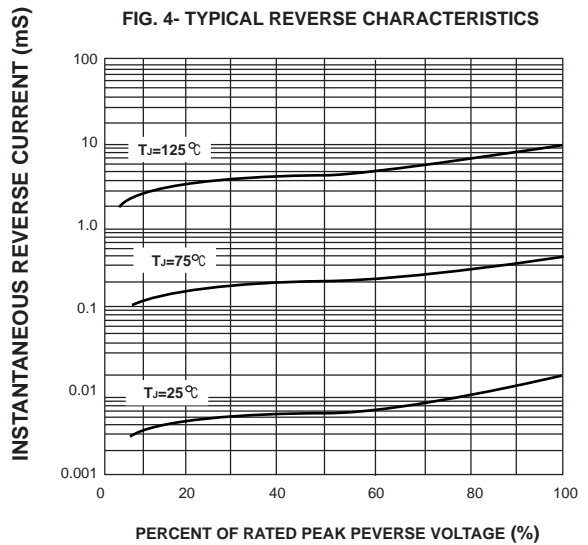

**FIG. 5- TYPICAL JUNCTION CAPACITANCE**

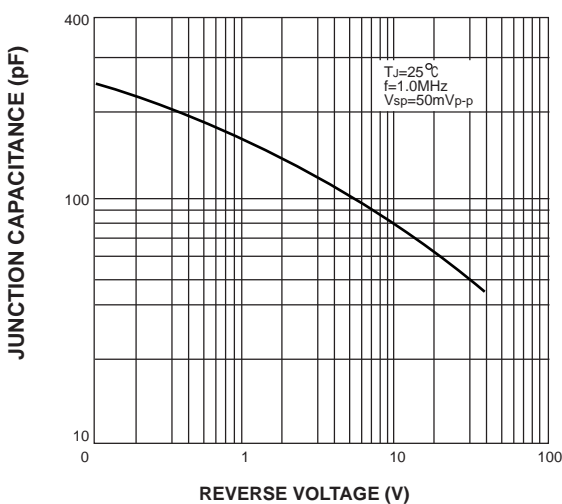

**FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE**

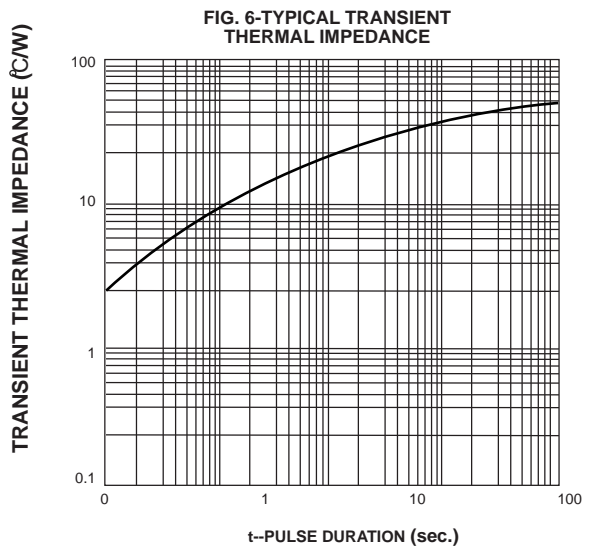

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Schottky Diodes & Rectifiers](#) category:*

*Click to view products by [FUXINSEMI](#) manufacturer:*

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [GS1JE-TP](#) [RB160M-50TR](#) [BAS 3010S-02LRH E6327](#)  
[BAT 54-02LRH E6327](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SBS818-TL-E](#) [SK310-T](#)  
[SK33A-TP](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#) [MA4E2501L-1290](#) [MBRB30H30CT-1G](#)  
[DMJ3940-000](#) [SB007-03C-TB-E](#) [SK32A-TP](#) [SK33B-TP](#) [SK35A-TP](#) [SK38B-LTP](#) [SK38B-TP](#) [NRVBM120LT1G](#) [NTE505](#)  
[NTSB30U100CT-1G](#) [SS0503SH-TL-E](#) [VS-6CWQ10FNHM3](#) [CRG04\(T5L,TEMQ\)](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA2100-HF](#)  
[ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [ACDBA260LR-HF](#) [ACDBA1100-HF](#) [MA4E2502L-1246](#) [10BQ060-M3/5BT](#)  
[NRVB130LSFT1G](#) [CRS08TE85LQM](#) [PMAD1108-LF](#)