

## FEATURES


- ❖ 350 Watts peak pulse power per line ( $t_P=8/20\mu s$ )
- ❖ Protect for two I/O lines with bi-directional
- ❖ Low clamping voltage
- ❖ Working voltage:24V
- ❖ Low leakage current
- ❖ RoHS compliant



SOT-23

## MAIN APPLICATIONS

- ❖ RS-232, RS-422 & RS-485
- ❖ Servers, notebook, and desktop
- ❖ Cellular handsets and accessories
- ❖ Control & monitoring systems
- ❖ Portable electronics
- ❖ Wireless bus protection
- ❖ Set-top box

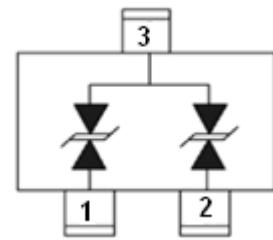

Pin Configuration

## PROTECTION SOLUTION TO MEET

- ❖ IEC61000-4-2 (ESD)  $\pm 30kV$  (air),  $\pm 30kV$  (contact)
- ❖ IEC61000-4-4 (EFT) 40A (5/50ns)
- ❖ IEC61000-4-5 (Lightning) 6A(8/20 $\mu s$ )

## MECHANICAL CHARACTERISTICS

- ❖ SOT-23 package
- ❖ Molding compound flammability rating : UL 94V-0
- ❖ Weight 8 milligrams (approximate)
- ❖ Quantity per reel : 3,000pcs
- ❖ Lead finish : lead free
- ❖ Marking code: CB2

**ABSOLUTE MAXIMUM RATINGS** ( $T_A=25^\circ\text{C}$ , RH=45%-75%, unless otherwise noted)

Parameter	Symbol	Value	Unit
Peak pulse power dissipation on 8/20μs waveform	$P_{PP}$	350	W
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	$V_{ESD}$	+/-30 +/-30	kV
Lead soldering temperature	$T_L$	260 (10 sec.)	°C
Operating junction temperature range	$T_J$	-55 to +125	°C
Storage temperature range	$T_{STG}$	-55 to +150	°C

**ELECTRICAL CHARACTERISTICS** ( $T_A=25^\circ\text{C}$ )


Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Reverse working voltage	$V_{RWM}$				24	V
Reverse breakdown voltage	$V_{BR}$	$I_T=1\text{mA}$	26.7			V
Reverse leakage current	$I_R$	$V_{RWM}=24\text{V}$			1	μA
Clamping voltage	$V_C$	$I_{PP}^{\text{(1)}}=1\text{A}, t_P=8/20\mu\text{s}$			43	V
		$I_{PP}^{\text{(2)}}=6\text{A}, t_P=8/20\mu\text{s}$			60	V
Junction capacitance	$C_J^{\text{(2)}}$	$V_{RWM}=0\text{V}, f=1\text{MHz}$		15		pF

①Surge waveform: 8/20μs


②  $C_J$  measured @ $V_{RWM}=0\text{V}$ , 1MHz (pin 1 to pin3, pin 2 to pin3)

**RATINGS AND V-I CHARACTERISTICS CURVES** ( $T_A=25^\circ\text{C}$ , unless otherwise noted)


**FIG.1: V-I curve characteristics  
(Bi-directional)**

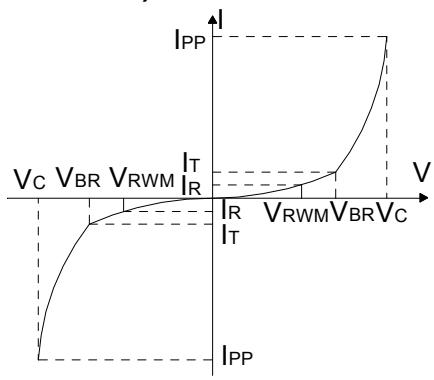


**FIG.2: Pulse waveform (8/20μs)**



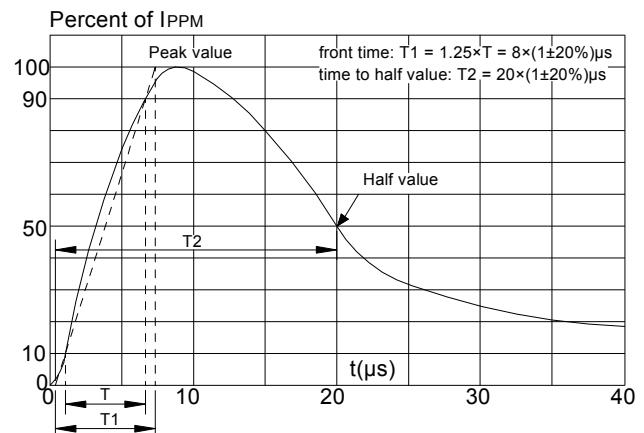


**FIG.3: Pulse derating curve**

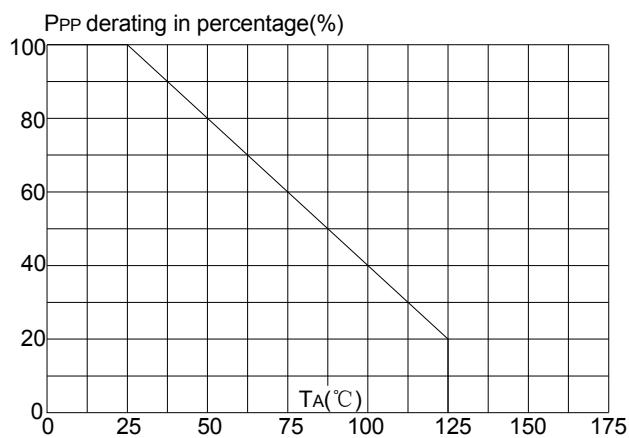

**FIG.4: ESD clamping (30kV contact)**

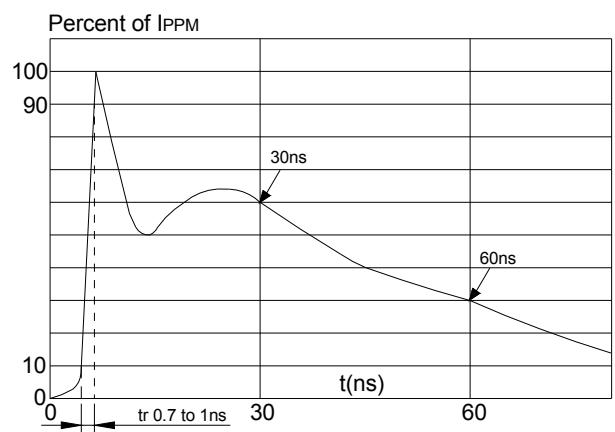


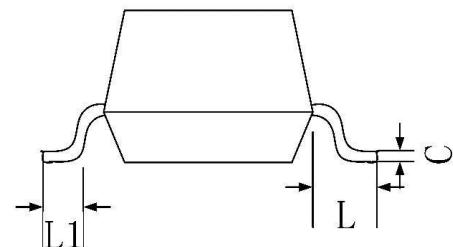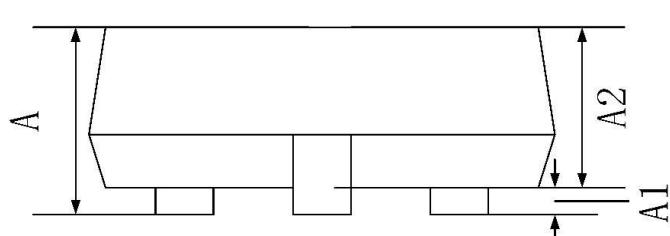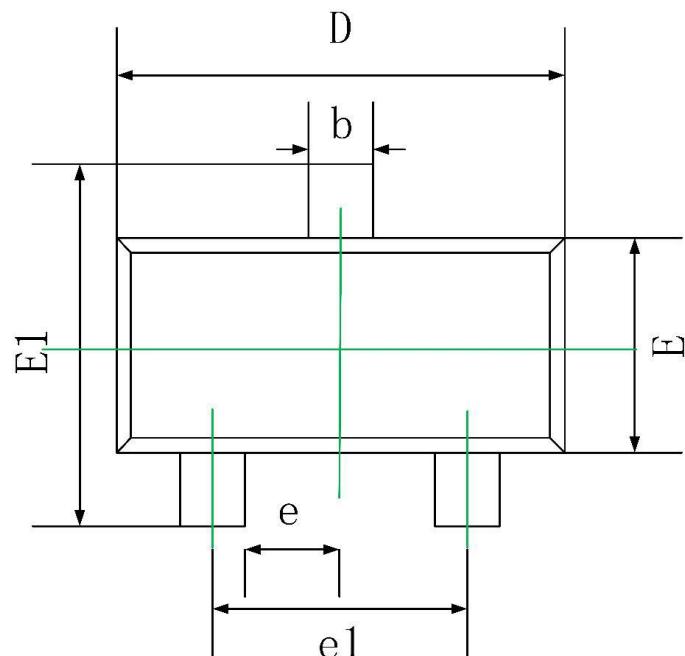**SOT-23 Package Information**


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP.		0.037 TYP.	
e1	1.800	2.000	0.071	0.079
L	0.550 REF.		0.022 REF.	
L1	0.300	0.500	0.012	0.020

## Suggested thermal profiles for soldering processes

- 1.Storage environment: Temperature=5°C~40°C Humidity=55%±25%
- 2.Reflow soldering of surface-mount devices

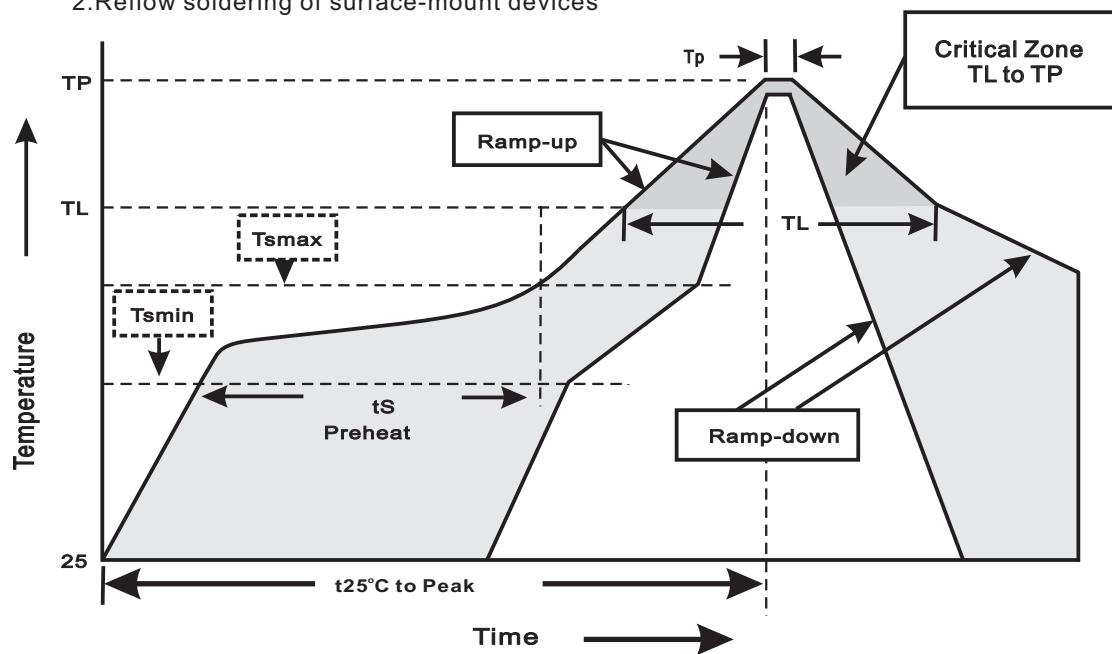

### 3.Reflow soldering

Profile Feature	Soldering Condition
Average ramp-up rate( $T_L$ to $T_P$ )	<3°C/sec
Preheat -Temperature Min( $T_{Smin}$ ) -Temperature Max( $T_{Smax}$ ) -Time(min to max)( $t_S$ )	150°C 200°C 60~120sec
$T_{Smax}$ to $T_L$ -Ramp-upRate	<3°C/sec
Time maintained above: -Temperature( $T_L$ ) -Time( $t_L$ )	217°C 60~260sec
Peak Temperature( $T_P$ )	255°C-0/+5°C
Time within 5°C of actual Peak Temperature( $t_P$ )	10~30sec
Ramp-down Rate	<6°C/sec
Time 25°C to Peak Temperature	<6minutes

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for ESD Suppressors / TVS Diodes category:***

***Click to view products by FUXINSEMI manufacturer:***

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [DESD5V0U1BB-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#) [P6KE8.2A](#)  
[SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS](#) [E6327](#) [ESD105-B1-02EL](#) [E6327](#) [ESD112-B1-02EL](#) [E6327](#) [ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)  
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DESD5V0U1BL-7B](#) [DRTR5V0U4SL-7](#)  
[SCM1293A-04SO](#) [ESD200-B1-CSP0201](#) [E6327](#) [SM12-7](#) [SMF8.0A-TP](#) [SMLJ45CA-TP](#) [SMQA1000T1G](#) [CEN955 W/DATA](#) [82350120560](#)  
[VESD12A1A-HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [IP4042CX5/LF,135](#) [D1213A-01LP4-7B](#) [D1213A-02WL-7](#) [1SMB33CAT3G-XYZ](#) [MMAD1108/TR13](#) [5KP100A](#) [5KP15A](#)