

Features

- On-Resistance: 0.8Ω (TYP)
- -3dB Bandwidth: 80MHz
- Single-Supply Operation: +1.8V ~ +5.5V
- Break-Before-Make Switching
- Rail-to-Rail Operation
- Low Static Power
- TTL/CMOS Compatible
- Operating Temperature: -40°C ~ +125°C
- Small Package:
GS3005 Available in TDFN-3x3-10L and MSOP-10 Packages

General Description

The GS3005 is low on-resistance (0.8Ω), fast single-pole double-throw (SPDT) CMOS switch with operation range +1.8V ~ +5.5V. The GS3005 is designed for low operating voltage, high current switching of signal gating, chopping, modulation or demodulation (modem), and speaker output for cell phone applications.

The device contains a break-before-make (BBM) feature. The control input, IN, tolerates input drive signals up to 5.5V, independent of supply voltage.

All devices are specified for the temperature range of -40°C to +125°C. The GS3005 Dual is available in Green TDFN-3X3-10L and MSOP-10 packages.

Applications

- Battery-Operated Equipment
- Wearable Devices
- Computer Peripherals
- Portable Systems
- Cell Phones
- PDAs

Pin Configuration

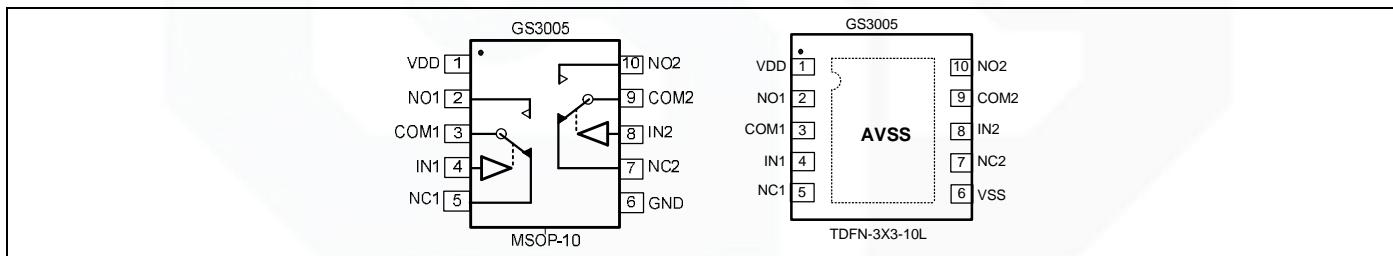


Figure 1. Pin Assignment Diagram

Absolute Maximum Ratings

| Condition | Min | Max |
|--|---------------|---------------|
| Power Supply Voltage (V_{DD} to V_{SS}) | -0.5V | +7.5V |
| Analog Input Voltage (NC NO or COM) | $V_{SS}-0.5V$ | $V_{DD}+0.5V$ |
| PDB Input Voltage | $V_{SS}-0.5V$ | +7V |
| Operating Temperature Range | -40°C | +125°C |
| Junction Temperature | +160°C | |
| Storage Temperature Range | -55°C | +150°C |
| Lead Temperature (soldering, 10sec) | +260°C | |
| Package Thermal Resistance ($T_A=+25^\circ C$) | | |
| MSOP-10, θ_{JA} | 216°C/W | |
| ESD Susceptibility | | |
| HBM | 3500V | |
| MM | 300V | |

Note: Stress greater than those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions outside those indicated in the operational sections of this specification are not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

Package/Ordering Information

| MODEL | CHANNEL | ORDER NUMBER | PACKAGE DESCRIPTION | PACKAGE OPTION | MARKING INFORMATION |
|--------|---------|--------------|---------------------|--------------------|---------------------|
| GS3005 | Dual | GS3005-FR | TDFN-3X3-10L | Tape and Reel,3000 | GS3005 |
| | | GS3005-MR | MSOP-10 | Tape and Reel,3000 | GS3005 |

Electrical Characteristics

(At $V_S = +5V$, and $T_A = +25^\circ C$, unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | | | | |
|--------------------------------------|---------------------------------------|---|------|-------|------|----------|
| | | | TYP | MIN | MAX | UNITS |
| ANALOG SWITCH | | | | | | |
| Analog Signal Range | V_{NO}, V_{NC}, V_{COM} | | 0 | V_S | V | |
| On-Resistance | R_{ON} | $V_S = 4.5V, V_{NO} \text{ or } V_{NC} = 3.5V, I_{COM} = -10mA$, Test Circuit 1 | 0.8 | | | Ω |
| | | $V_S = 2.7V, V_{NO} \text{ or } V_{NC} = 1.5V, I_{COM} = -10mA$, Test Circuit 1 | 1.9 | | | Ω |
| On-Resistance Match Between Channels | ΔR_{ON} | $V_S = 4.5V, V_{NO} \text{ or } V_{NC} = 3.5V, I_{COM} = -10mA$, Test Circuit 1 | 0.43 | | 0.47 | Ω |
| | | $V_S = 2.7V, V_{NO} \text{ or } V_{NC} = 1.5V, I_{COM} = -10mA$, Test Circuit 1 | 0.45 | | 0.5 | Ω |
| On-Resistance Flatness | $R_{FLAT(ON)}$ | $V_S = 4.5V, V_{NO} \text{ or } V_{NC} = 1.0V, 2.0V, 3.5V, I_{COM} = -10mA$, Test Circuit 1 | 0.2 | | 0.3 | Ω |
| | | $V_S = 2.7V, V_{NO} \text{ or } V_{NC} = 1.0V, 1.5V, 2.0V, I_{COM} = -10mA$, Test Circuit 1 | 0.2 | | 0.35 | Ω |
| Source OFF Leakage Current | $I_{NC(OFF)}, I_{NO(OFF)}$ | $V_S = 5.5V, V_{NO} \text{ or } V_{NC} = 1.0V, 4.5V, V_{COM} = 4.5V, 1.0V$ | | | 1 | μA |
| Channel ON Leakage Current | $I_{NC(ON)}, I_{NO(ON)}, I_{COM(ON)}$ | $V_S = 5.5V, V_{COM} = 1.0V, 4.5V V_{NO} \text{ or } V_{NC} = 1.0V, 4.5V, \text{or floating}$ | | | 1 | μA |
| DIGITAL INPUTS | | | | | | |
| Input High Voltage | V_{INH} | $V_S = 5V$ | 1.5 | | | V |
| | | $V_S = 3V$ | 0.9 | | | V |
| Input Low Voltage | V_{INL} | $V_S = 5V$ | | 0.55 | | V |
| | | $V_S = 3V$ | | 0.45 | | V |
| Input Leakage Current | I_{IN} | $V_S = 5.5V, V_{IN} = 0V \text{ or } 5.5V$ | | | 1 | μA |



Electrical Characteristics

(At $V_S = +5V$, and $T_A = +25^\circ C$, unless otherwise noted.)


| PARAMETER | SYMBOL | CONDITIONS | | | | |
|--------------------------------|---------------------------------------|---|---------|-----|-----|---------|
| | | | TYP | MIN | MAX | UNITS |
| DYNAMIC CHARACTERISTICS | | | | | | |
| Turn-On Time | T_{ON} | $V_S = 5V, V_{NO} \text{ or } V_{NC} = 3V, V_{IN_H} = 1.5V, V_{IN_L} = 0V, R_L = 300\Omega, C_L = 35pF, \text{ Test Circuit 2}$ | 20 | | | ns |
| | | $V_S = 3V, V_{NO} \text{ or } V_{NC} = 1.5V, V_{IN_H} = 1.5V, V_{IN_L} = 0V, R_L = 300\Omega, C_L = 35pF, \text{ Test Circuit 2}$ | 28 | | | ns |
| Turn-Off Time | T_{OFF} | $V_S = 5V, V_{NO} \text{ or } V_{NC} = 3V, V_{IN_H} = 1.5V, V_{IN_L} = 0V, R_L = 300\Omega, C_L = 35pF, \text{ Test Circuit 2}$ | 23 | | | ns |
| | | $V_S = 3V, V_{NO} \text{ or } V_{NC} = 1.5V, V_{IN_H} = 1.5V, V_{IN_L} = 0V, R_L = 300\Omega, C_L = 35pF, \text{ Test Circuit 2}$ | 22 | | | ns |
| Break-Before-Make Time Delay | T_{BBM} | $V_S = 5V, V_{NO1} \text{ or } V_{NC1} = V_{NO2} \text{ or } V_{NC2} = 3V, R_L = 300\Omega, C_L = 35pF, \text{ Test Circuit 3}$ | 23 | | | ns |
| | | $V_S = 3V, V_{NO1} \text{ or } V_{NC1} = V_{NO2} \text{ or } V_{NC2} = 3V, R_L = 300\Omega, C_L = 35pF, \text{ Test Circuit 3}$ | 27 | | | ns |
| Skew | T_{SKEW} | $V_S = 5V, R_S = 39\Omega, C_L = 50pF, \text{ Test Circuit 4}$ | 9 | | | ns |
| | | $V_S = 3V, R_S = 39\Omega, C_L = 50pF, \text{ Test Circuit 4}$ | 9 | | | ns |
| Off Isolation | O_{ISO} | $R_L = 50\Omega, \text{ Signal} = 0dBm, C_L = 5pF, \text{ Test Circuit 5}$ | f=10MHz | -40 | | db |
| | | | f=1MHz | -60 | | db |
| -3dB Bandwidth | BW | $R_L = 50\Omega, \text{ Signal} = 0dBm, C_L = 5pF, \text{ Test Circuit 6}$ | 80 | | | MHz |
| Source OFF Capacitance | $C_{NC(OFF)}, C_{NO(OFF)}$ | f=1MHz | 20 | | | pF |
| Channel ON Capacitance | $C_{NC(ON)}, C_{NO(ON)}, C_{COM(ON)}$ | f=1MHz | 73 | | | pF |
| POWER REQUIREMENTS | | | | | | |
| Power Supply Range | V_S | | | 1.8 | 5.5 | V |
| Power Supply Current | I_S | $V_{IN} = 0V \text{ or } V_S$ | | | 1 | μA |

Typical Performance characteristics


At $T_A=+25^\circ\text{C}$, and $V_S=+5\text{V}$, unless otherwise noted.

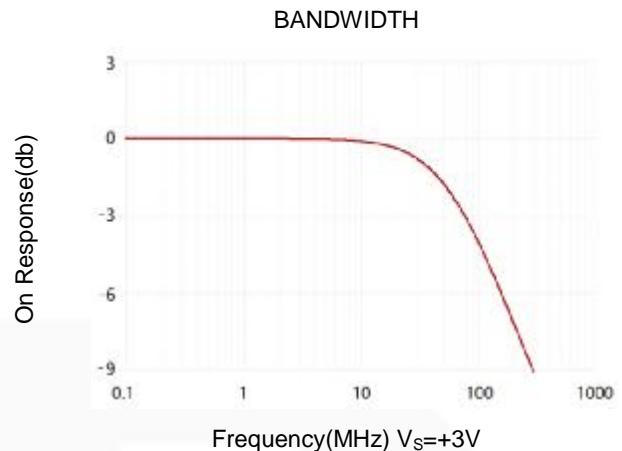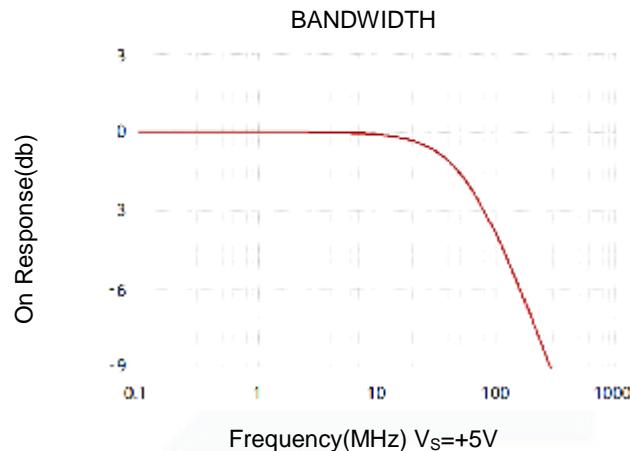


Typical R_{ON} vs Input Voltage (VI)

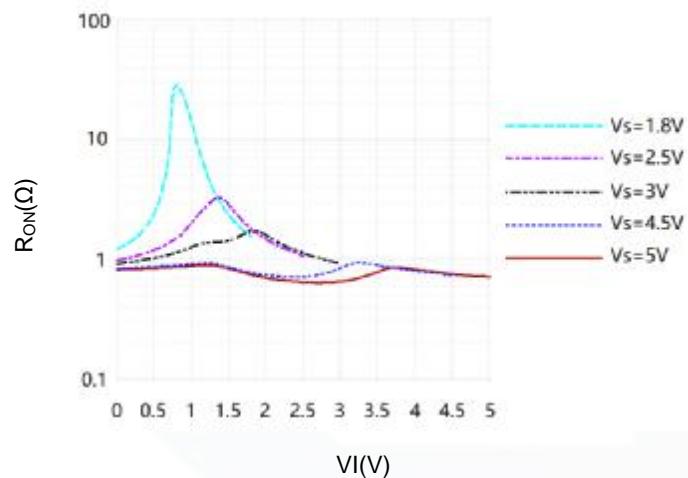


Parameter Measurement Information

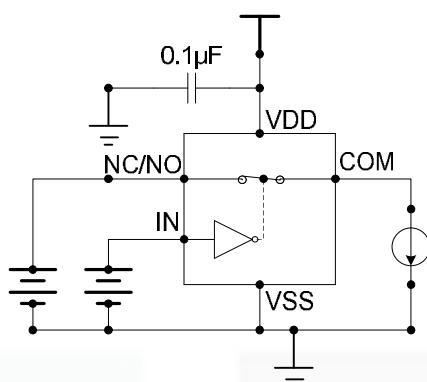

Test Circuit 1. On-Resistance

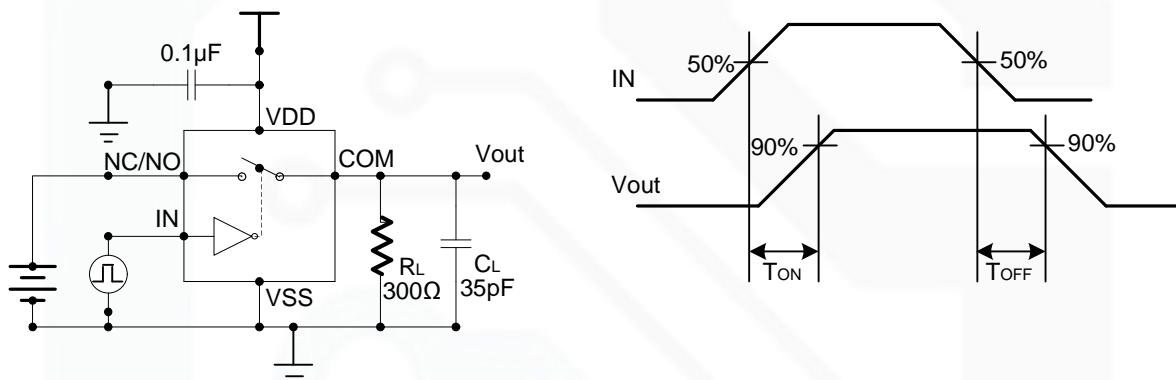


Test Circuit 2. Switching Times

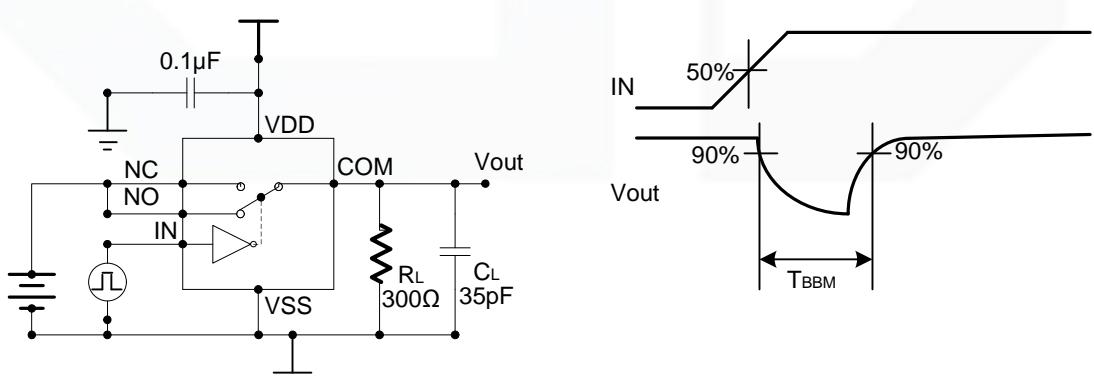


Test Circuit 3. Break-Before-Make Time Delay


Parameter Measurement Information

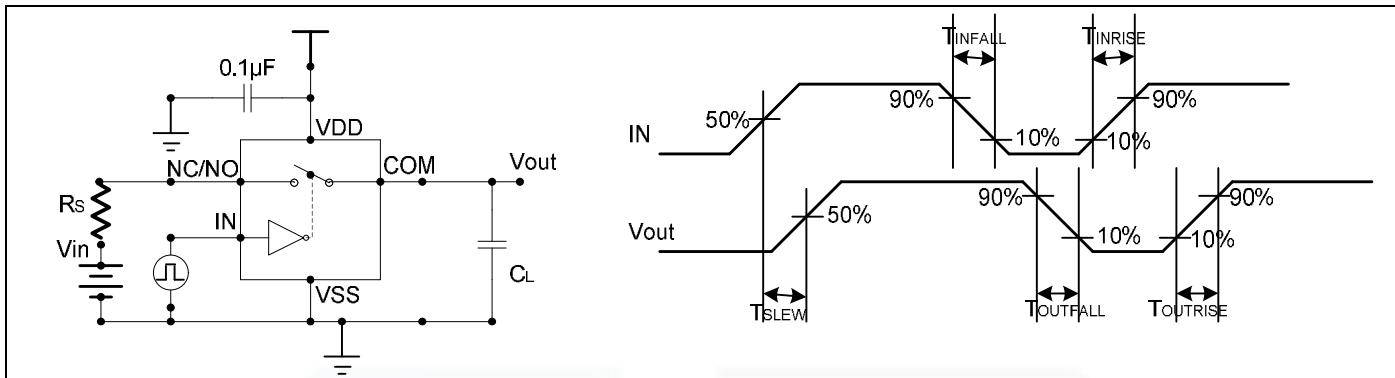

Test Circuit 4. Output Signal Skew

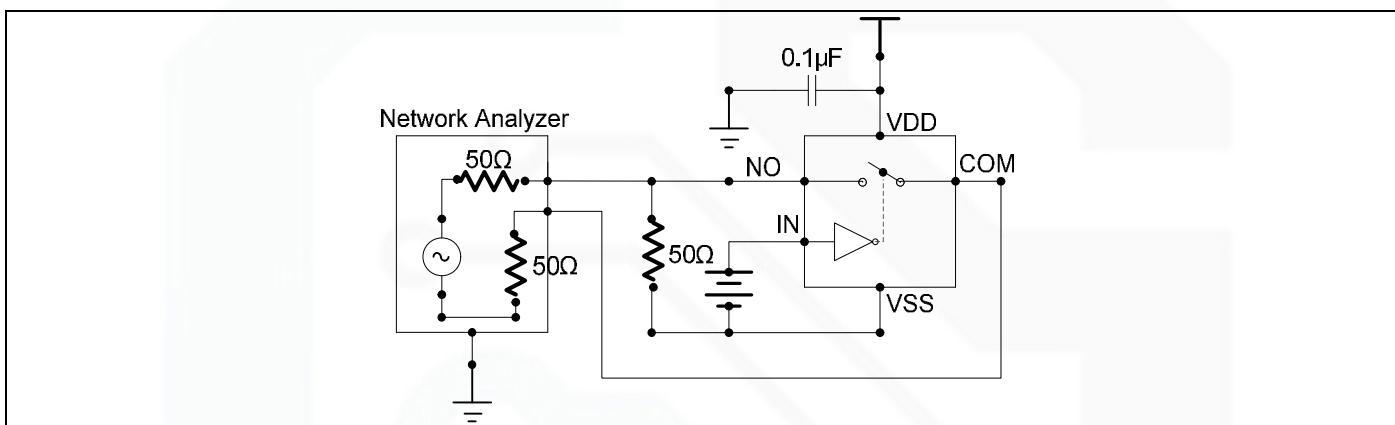


Test Circuit 5. Off Isolation

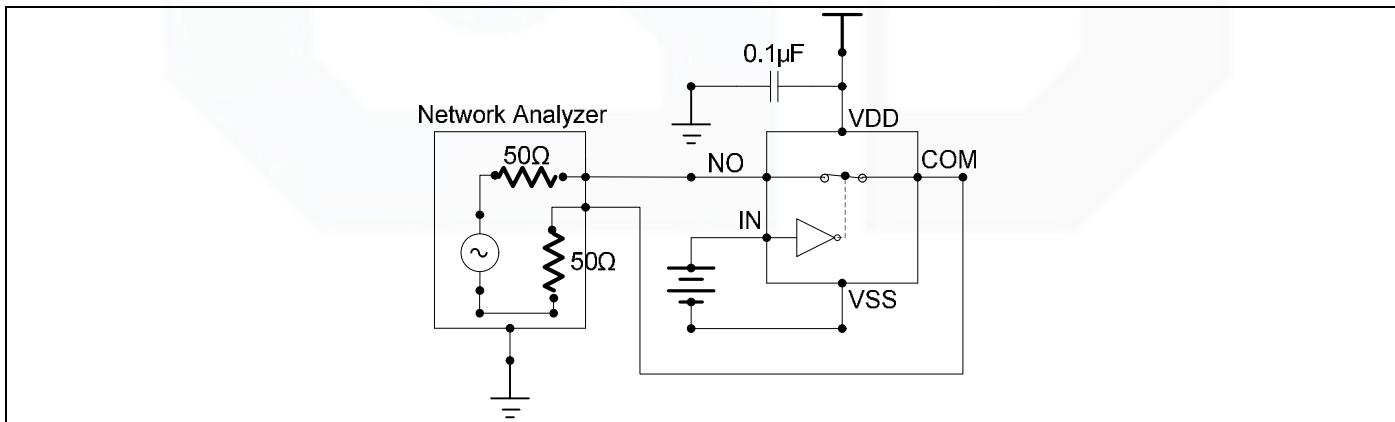


Test Circuit 6. -3dB Bandwidth

Package Information

MSOP-10

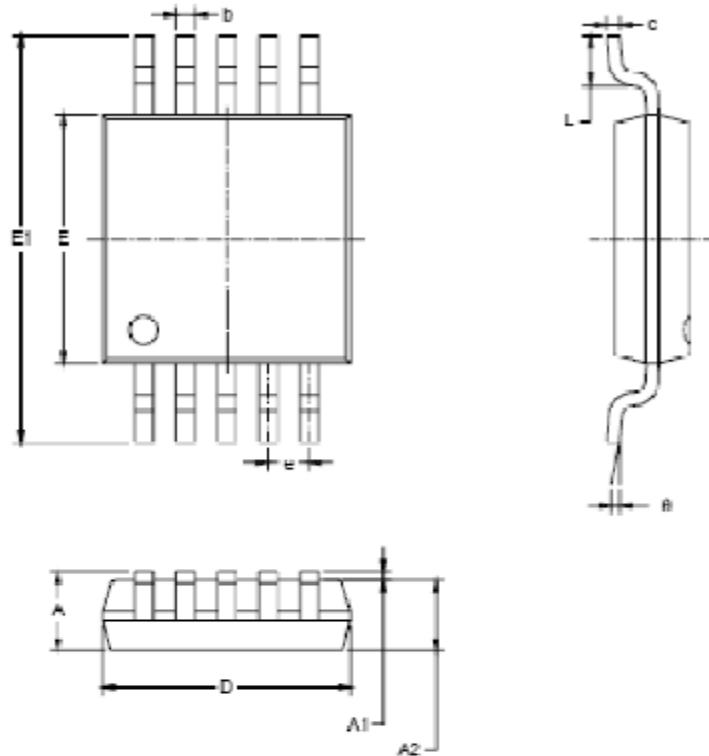

| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|----------|------------------------------|-------|-------------------------|-------|
| | MIN | MAX | MIN | MAX |
| A | 0.820 | 1.100 | 0.032 | 0.043 |
| A1 | 0.020 | 0.150 | 0.001 | 0.005 |
| A2 | 0.750 | 0.950 | 0.030 | 0.037 |
| b | 0.180 | 0.280 | 0.007 | 0.011 |
| c | 0.080 | 0.230 | 0.004 | 0.009 |
| D | 2.900 | 3.100 | 0.114 | 0.122 |
| E | 2.000 | 3.100 | 0.114 | 0.122 |
| E1 | 4.750 | 5.050 | 0.187 | 0.199 |
| e | 0.500 BSC | | 0.020 BSC | |
| L | 0.400 | 0.800 | 0.016 | 0.031 |
| θ | 0° | 6° | 0° | 6° |

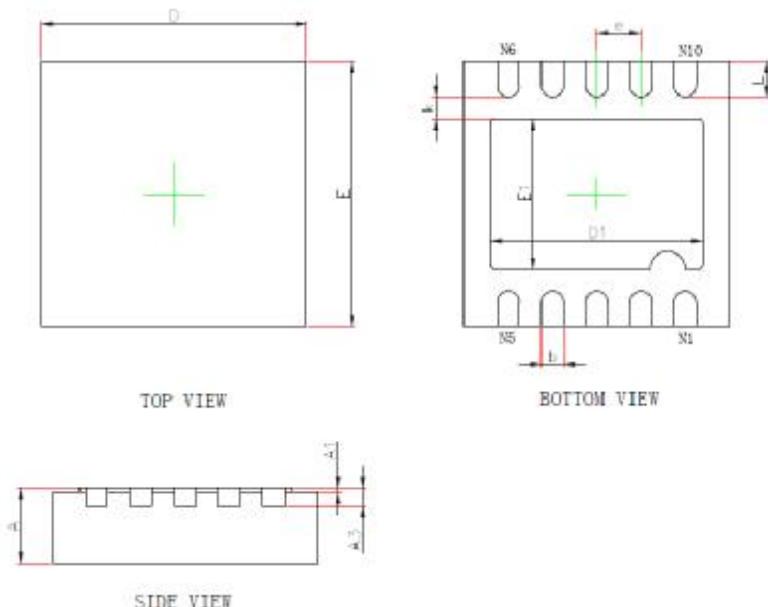TDFN-3X3-10L


| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|-------------|----------------------|-------------|
| | Min. | Max. | Min. | Max. |
| A | 0.700/0.800 | 0.800/0.900 | 0.028/0.031 | 0.031/0.035 |
| A1 | 0.000 | 0.050 | 0.000 | 0.002 |
| A3 | 0.203REF. | | 0.008REF. | |
| D | 2.924 | 3.076 | 0.115 | 0.121 |
| E | 2.924 | 3.076 | 0.115 | 0.121 |
| D1 | 2.300 | 2.500 | 0.091 | 0.098 |
| E1 | 1.600 | 1.800 | 0.063 | 0.071 |
| k | 0.200MIN. | | 0.008MIN. | |
| b | 0.200 | 0.300 | 0.008 | 0.012 |
| e | 0.500TYP. | | 0.020TYP. | |
| L | 0.324 | 0.476 | 0.013 | 0.019 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Analogue Switch ICs](#) category:

Click to view products by [Gainsil manufacturer:](#)

Other Similar products are found below :

[FSA3051TMX](#) [NLVAS4599DTT1G](#) [MAX4992EVB+T](#) [MAX4684ETB+T](#) [BCM6522IPBG](#) [BCM65300IFSBG](#) [MAX14764ETA+T](#)
[TMUX1113RSVR](#) [TMUX1112RSVR](#) [ADG1436TRUZ-EP](#) [BL4684C](#) [PE423422A](#) [PE42359SCAA](#) [PE42540F](#) [RS550YUCM12](#)
[ADGS1414DBCCZ](#) [ADG658YRUZ-REEL7](#) [RS2117YUTQK10](#) [RS2118YUTQK10](#) [RS2227XUTQK10](#) [SP2526A-1EN-L/TR](#) [FSA4157P6X](#)
[BA7603F-E2](#) [MAX4702EUE+](#) [MAX4617CUE+](#) [MAX4599EUT+T](#) [MAX4066ESD+](#) [MAX4052ACSE+](#) [MAX396CAI+](#) [MAX391CPE+](#)
[MAX4730EXT+T](#) [MAX314CPE+](#) [MAX4051AEEE+](#) [BU4066BCFV-E2](#) [MAX313CPE+](#) [BU4S66G2-TR](#) [TS3A4751PWR](#)
[NCN1154MUTAG](#) [DG444DY-E3](#) [NLAS4157DFT2G](#) [NLAS4599DFT2G](#) [NLAS7242MUTBG](#) [NLASB3157DFT2G](#) [NLAST4599DFT2G](#)
[NLAST4599DTT1G](#) [DG403DY-T1-E3](#) [MAX4714EXTT](#) [MAX392CPE](#) [BGSX22G2A10E6327XTSA1](#) [ADG1611BRUZ-REEL7](#)