

Specifications

Materials
 Conductor: Tinned Copper
 Insulation: Flame retardant polyester, White
 Supporting Tape: Polyester, Blue

Electrical
 Voltage Rating: 60V
 Current Rating: 0.5mm pitch=0.5A
 1.0mm pitch=1A


Mechanical & Environmental
 Operating Temperature: 80°C (UL20624)
 105°C (UL20706)

Durability: 30 Cycles

Notes
 For tolerance information, contact GCT

For non-standard options, contact GCT

- Exposed conductor length
- Support strip length
- Conductor thickness/width
- Folding/bending to an angle

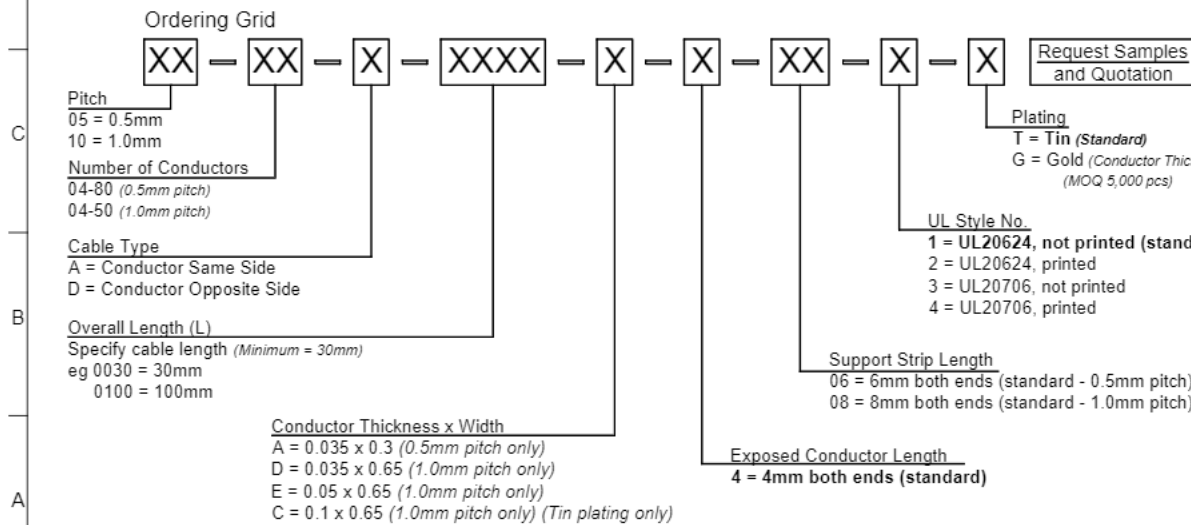

Support Strip and Plating Options by Pitch			
Pitch (mm)	Support Strip Length (mm)	Plating Options (conductor thickness x width (mm))	
		Tin	Gold
0.5	6	0.035 x 0.3 (A)	0.035 x 0.3 (A)
1.0	8	0.035 x 0.65 (D)	0.035 x 0.65 (D)
		0.05 x 0.65 (E)	0.05 x 0.65 (E)
		0.1 x 0.65 (C)	0.05 x 0.65 (E)

See Shielded FFC drawing for shielding options

Part Number N/A		Product Description Flat Flex Cable Ordering Information	
Drawing Date 23rd May 2011			
By CC	Tolerances (Except as Noted) Length	Units: Metric (mm)	
Detail FFC CABLE B PCN	Angle		
Revision B1			
Date 30/06/23			
<p>This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE</p>		 www.gct.co	
Not to Scale	Drawn By SA	Sheet No. 1/1	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [FFC / FPC Jumper Cables](#) category:

Click to view products by [GCT manufacturer](#):

Other Similar products are found below :

[8-1474659-7](#) [FSK-21.5A-20](#) [FSK-23A](#) [FSN-14.5A-6](#) [1474494-5](#) [1557385-1](#) [2-1437211-4](#) [2-6447164-4](#) [1-6437133-3](#) [FSK-21A](#) [FSN-21.5A-32](#) [FSN-24A](#) [2-1437181-9](#) [4-1437186-9](#) [4-1474659-8](#) [5-1474654-9](#) [6-6437158-0](#) [1474544-1](#) [7-6474640-3](#) [8-1474644-8](#) [FSK-22Z-12](#) [1437190-1](#) [2-6437158-6](#) [3-1437213-7](#) [FSK-11.25A-40](#) [FSN-11A-10](#) [FSP-22A](#) [FST-41B-5](#) [1-1437203-7](#) [6447164-6](#) [1474678-7](#) [3-1437219-8](#) [FSK-11.1A-40](#) [FSN-11.5A-3](#) [1437219-2](#) [05-001-152FB](#) [05-001.5-152FB](#) [7-1437166-1](#) [5-1474677-4](#) [3-1447175-2](#) [4-6447189-2](#) [15020-1538](#) [FSK-21.3A-25](#) [07-004.5-172-P](#) [JS05B-12P-030-3-4](#) [JS05A-16P-080-4-8](#) [JS05A-12P-050-3-4](#) [JS05A-16P-100-3-4](#) [JS05A-12P-100-3-4](#) [JS05A-12P-030-3-4](#)