
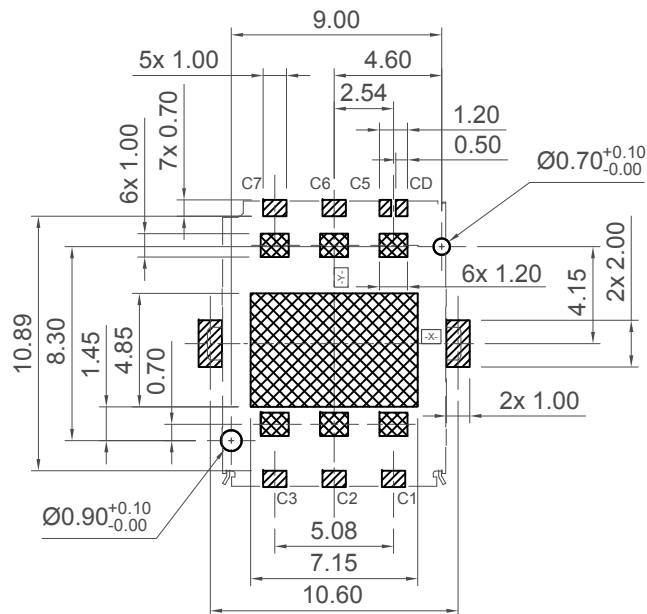
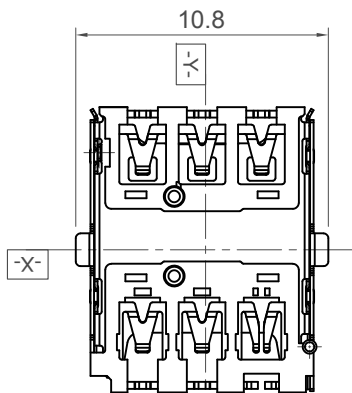
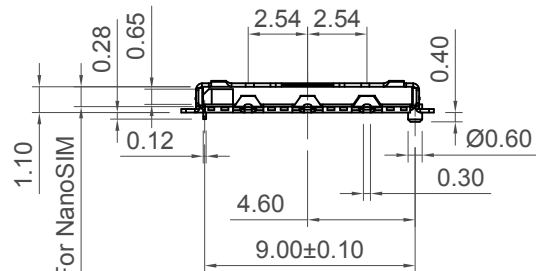



Section A-A

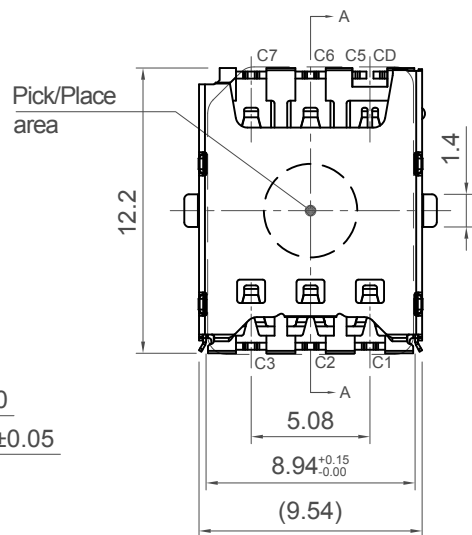

Recommended PCB Layout

As viewed from component side General Tolerance ±0.05
Locating peg holes only applicable to locating peg version

▨ Solder Area ▩ Keep Out Area □ Component Outline

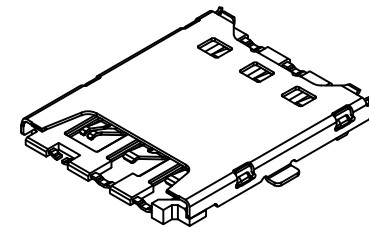

Specification:

Material:

Plastic Housing: LCP 30%GF, UL94V-0, Black
Contact Terminal: Phosphor Bronze, T= 0.12mm
Cover: SUS301-H, T= 0.15mm

Plating:


Contact Terminal:
Contact Area: 3μ" Gold
Solder area: Gold Flash
Underplating: Ni overall 50μ" min.
Cover: Ni overall 50μ" min.

Mechanical:


Duration: 5000 cycles

Electrical:

Voltage Rating: 30V max.
Current Rating: 0.5A max.
Operating Temperature: -40°C to +85°C
Dielectric Withstanding Voltage: 100V AC (60 Sec min.)
Insulation Resistance: 1000 MΩ min.
Contact Resistance: 100 mΩ max.




Ordering Grid

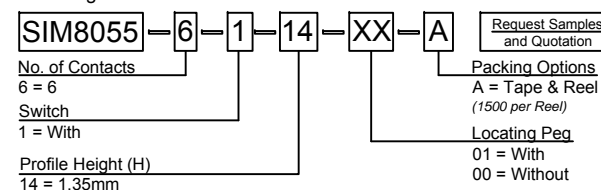

Part Number		Product Description			This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE
SIM8055		Nano SIM Card Connector, Push-Pull Type, with Switch			
Drawing Date		6 Pin, SMT, Profile 1.35mm			
27th November 2017					Not to Scale
By	CC	Tolerances (Except as Noted)	Units:		
Detail	Drawing Release	Length X. ± 0.35 X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.10	Metric (mm)		
Revision	A5	All ± 2°			
Date	22/01/21				Drawn By CC
					Sheet No. 1/3



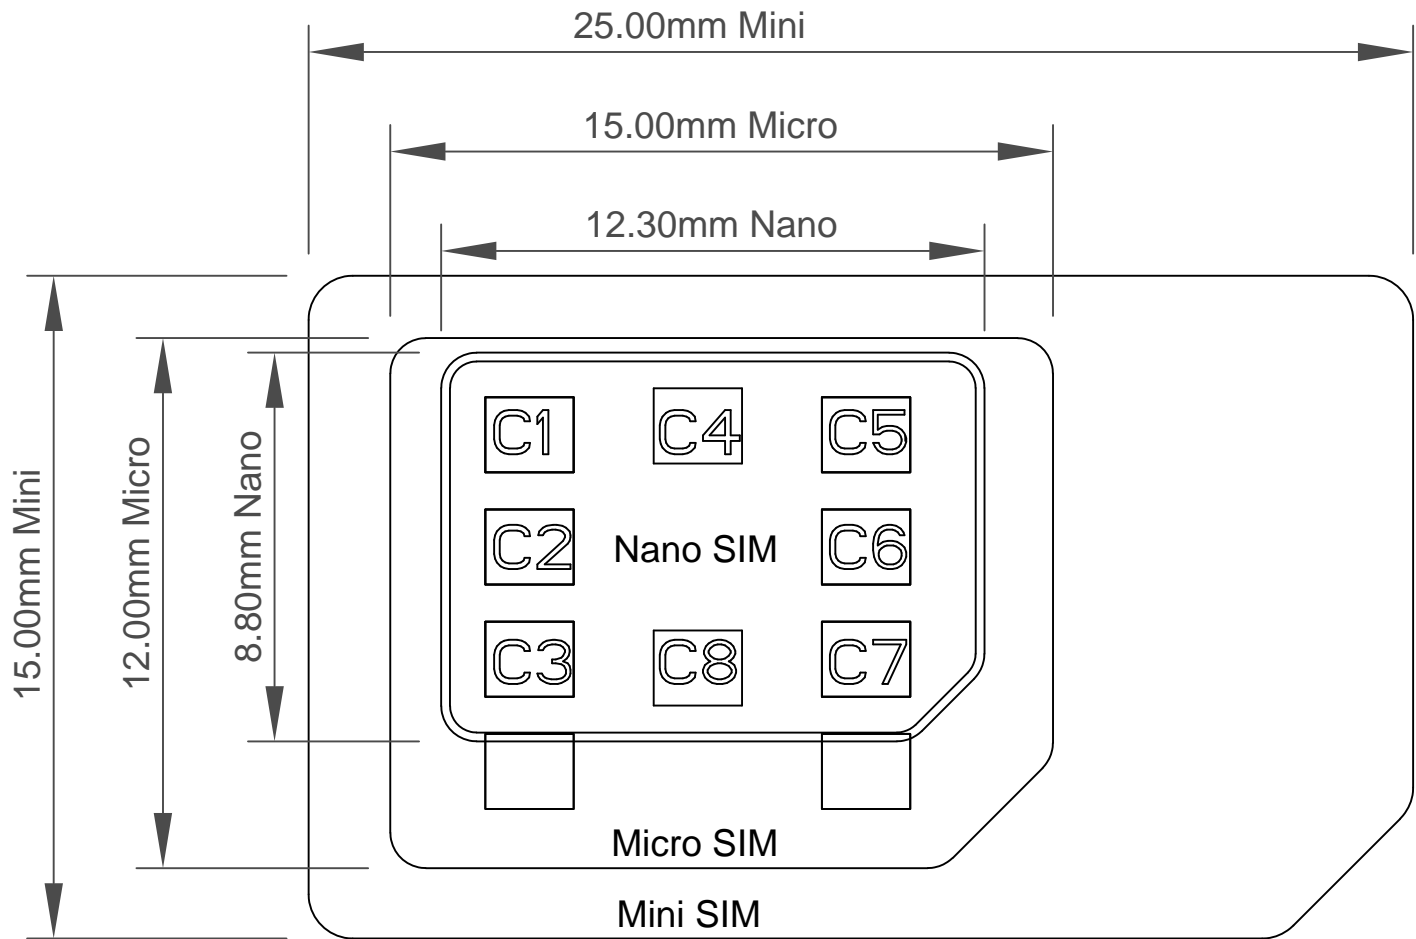

- C1----->VCC
- C2----->RST
- C3----->CLK
- C5----->GND
- C6----->Vpp
- C7----->I/O


Reference

Part Number		Product Description	
SIM8055		Nano SIM Card Connector, Push-Pull Type, with Switch	
Drawing Date		6 Pin, SMT, Profile 1.35mm	
27th November 2017			
By	CC	Tolerances (Except as Noted)	Units:
Detail	Drawing Release	Length	Metric (mm)
Revision	A5	X. ± 0.35	
Date	22/01/21	X.X ± 0.25	
		X.XX ± 0.15	
		X.XXX ± 0.10	
		All ± 2°	
		This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE	
Not to Scale	Drawn By	CC	Sheet No.
			2/3




H
G
F
E
D
C
B
A

1 2 3 4 5 6 7 8

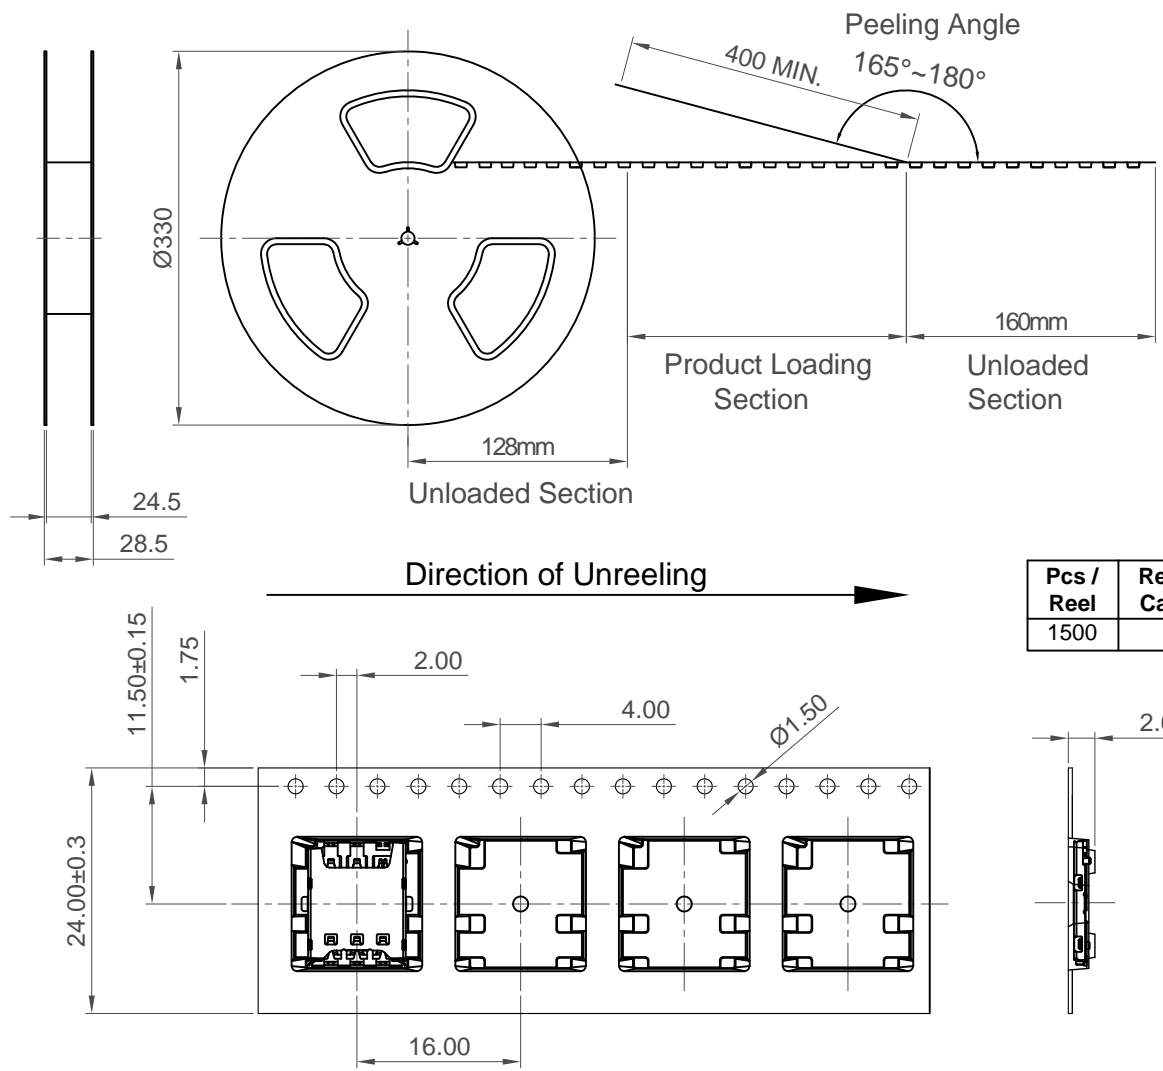

Pcs / Reel	Reels / Carton	Total Quality
1500	9	13500

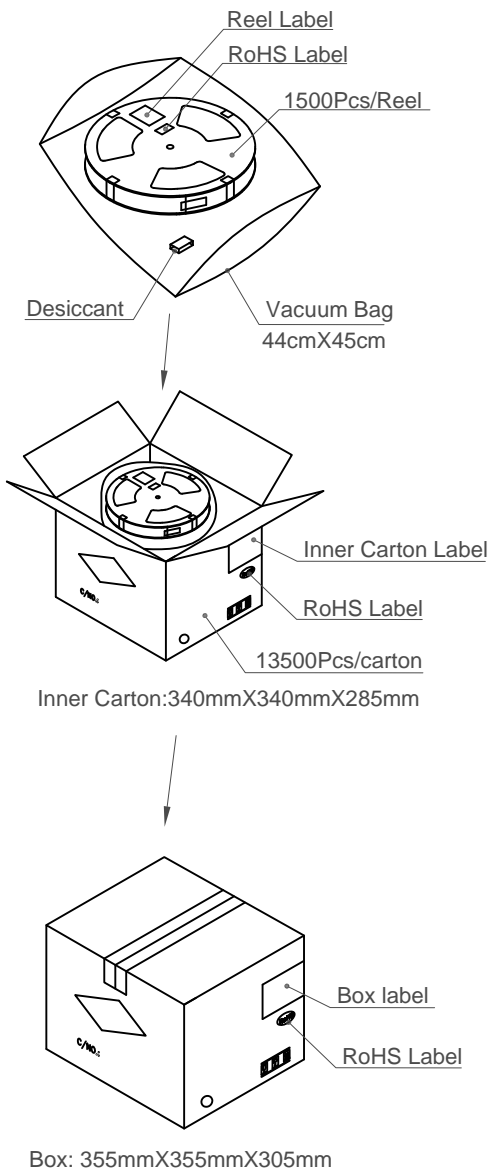

Notes:
Peeling off force of top tape: 0.1-1.3N (Peeling direction as shown)

Materials:
Carrier Tape: Polystyrene (PS)
Top Tape: PE
Reel Tape: Polystyrene (PS)
Bag: PE

Part Number		Product Description	
SIM8055		Nano SIM Card Connector, Push-Pull Type, with Switch	
Drawing Date		6 Pin, SMT, Profile 1.35mm	
27th November 2017			
By	CC	Tolerances (Except as Noted)	Units:
Detail	Drawing Release	Length	Metric (mm)
Revision	A5	Angle	
Date	22/01/21		



This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE



Not to Scale	Drawn By CC	Sheet No. 3/3
--------------	-------------	---------------

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Memory Card Connectors](#) category:

Click to view products by [GCT](#) manufacturer:

Other Similar products are found below :

[M21-033321-005](#) [6407-249V-25273P](#) [6407-249V-25343P](#) [6426-201-21343](#) [69.920.0553.0](#) [FCN-568P068-G/07-4V](#) [809180410000000](#)
[N7E50-7516PG-20-WF](#) [HMCAP001](#) [2041353-2](#) [33CFAE-DN](#) [502431-1011](#) [EN2997S61212BN](#) [EN2997SE61212BN](#) [617230001](#) [NX1-32T-](#)
[KT3K\(05\)](#) [95622-003LF](#) [95079-00CALF](#) [33DVIR-29S12R](#) [125A-78C00](#) [MI20A-50PD-SF-EJL\(71\)](#) [KP10S-SF-PEJ\(812\)](#) [504536-0691](#)
[504580-0691](#) [CCM03-3109 B LFT](#) [MI21-50PD-SF\(91\)](#) [2309923-1](#) [61126-050CAHLF](#) [IC1GA-68PD-1.27DS-EJ\(72\)](#) [GTFP08432B1HR](#)
[G85DT17001P1EU](#) [G85B21611142HHR](#) [GSD090144HR](#) [G85D1140022P1HR](#) [GMCB05801124EU](#) [G85C11101152HHR](#)
[G85B231021B1HR](#) [G85D1160022HHR](#) [112K-TAA0-RA1](#) [115S-ACA2](#) [115S-ACA3](#) [115S-BS00](#) [115S-BT00](#) [115V-AD00](#) [MCSP-Q1-08-A-](#)
[SG-T/R](#) [503960-0695](#) [101B-TAA0-R](#) [101D-TAAA-R01](#) [101D-TAAB-R01](#) [104D-TCA0-R06](#)