
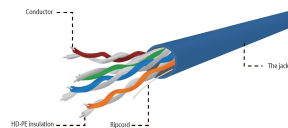


# CAT5e UTP LAN cable (CCA), solid, 1000 ft, blue

UPC-5004E-SOL-B

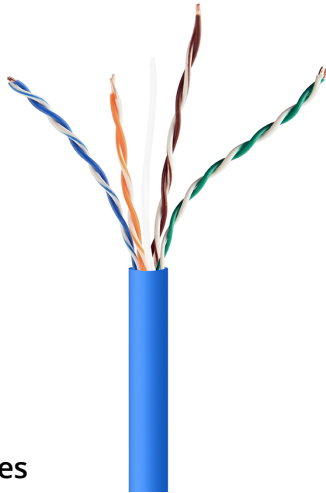

## Features

- UTP unshielded LAN cable with solid wires
- CCA conductors
- Category 5E

## Specifications

Unshielded twisted pair (UTP) LAN cable  
 Category 5E  
 Conductor material: AWG24 solid CCA  
 Length: 1000 ft (305 m)  
 Package: Reelex box  
 Color: blue  
 Conductor resistance (max): 250 ohm/1000m  
 Insulation resistance (min): 5M ohm/km  
 Pair-to-Ground capacitance: < 330PF / 100m  
 Characteristic impedance: < 100Ohm (+/15)  
 Transport and storage temperature: 0 60 degrees  
 Operating temperature: -20 70 degrees

## Packaging

Q'ty in crtn, pcs	2
Crtn volume, CUM	0.059
Crtn weight, kgs	14.34
Individual package size LxWxH:	350x200x350 mm
Carton size LxWxH:	430x365x375 mm
Country of origin	CN
Barcode	8716309123945
Customs code	8544492000

## Certificates



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Ethernet Cables / Networking Cables](#) category:*

*Click to view products by [Gembird](#) manufacturer:*

Other Similar products are found below :

[73-7795-1](#) [MCJB2-10P6Q7-120](#) [84909-0204](#) [1200700174](#) [1200860368](#) [E16A06002M030](#) [E200102-009-S1](#) [AX105346-EW](#) [MT14-187L](#)  
[MWDM2L-51GS-6J1-2.82B](#) [ERWPAB3002M005](#) [190-038045-01](#) [NK5EPC1GRY](#) [NK5EPC4Y](#) [1969343-6](#) [ICD056GVP163D-C0](#)  
[C5UMB3FBG](#) [C631208025](#) [C631208035](#) [C6F1106015](#) [2142758-2](#) [2168427-2](#) [21949-1](#) [2J1866A](#) [RJF SFTP 5E 0500](#) [AX100351](#)  
[UTPCH14GY](#) [45-5684](#) [09459711142](#) [100345-1301](#) [MWDM2L-25P-8K1-.500B](#) [MWDM6L-31S-6C4-.375H](#) [73-7793-1](#) [74764-1101](#)  
[WHU18-3636-048](#) [RJF2SA2G05100BTX](#) [1R4000A39M030](#) [UTPSP6GY](#) [UTPSP2GY](#) [UTPSP10GY](#) [UTPCH5GY](#) [UTP28SP15M](#)  
[UTP28CH100OR](#) [74764-2301](#) [E66A06002M020](#) [NPC-5E-010-GY](#) [SAC-5P-MS/ 1.0-920/FS SCO AR](#) [1-3636-601-5211](#) [1-3636-600-5212](#) [1-3636-461-5208](#)