

# Single Phase Glass Passivated Silicon Bridge Rectifier


**V<sub>RRM</sub> = 50 V - 400 V**
**I<sub>O</sub> = 10 A**

## Features

- Low forward voltage
- High surge overload rating
- Ideal for printed circuit boards
- High temperature soldering: 260°C/ 10 s
- Types from 50 V up to 400 V V<sub>RRM</sub>
- Not ESD Sensitive

## Applications

- Switching power supply
- Home appliances, office devices
- Industrial auto-equipments

**BR-10 Package**


## Maximum ratings at T<sub>A</sub> = 25 °C, unless otherwise specified

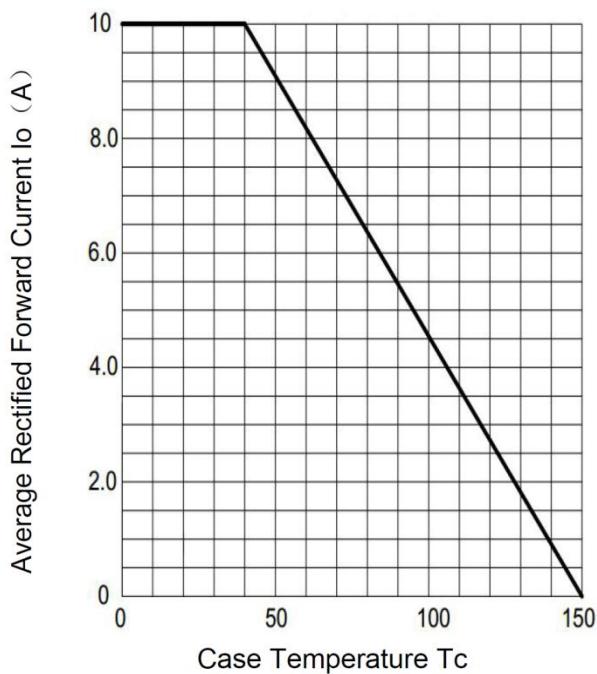
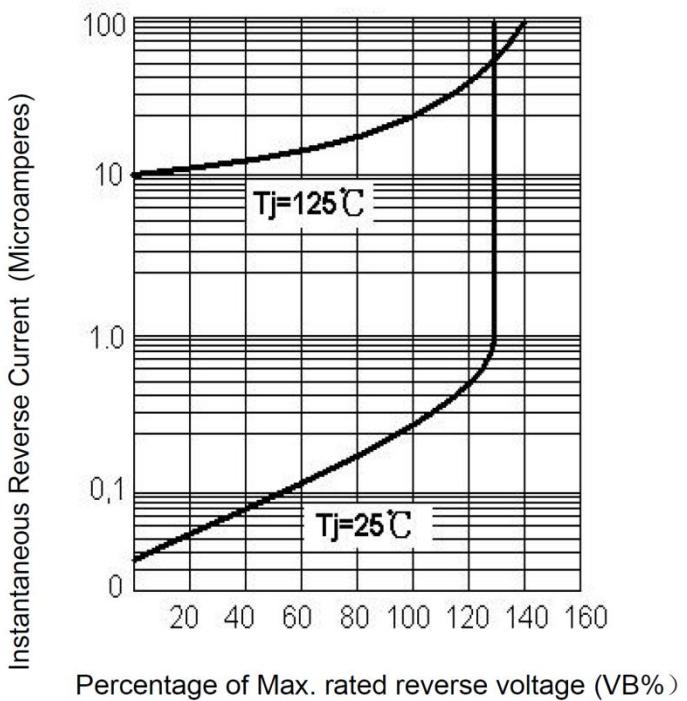
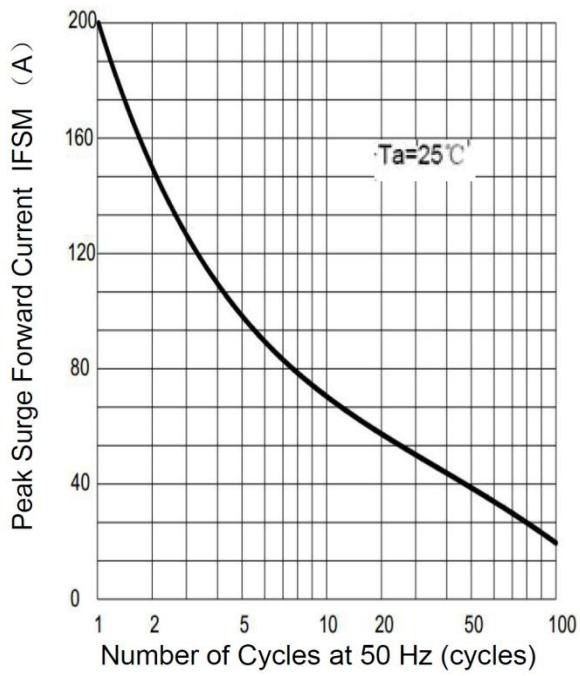
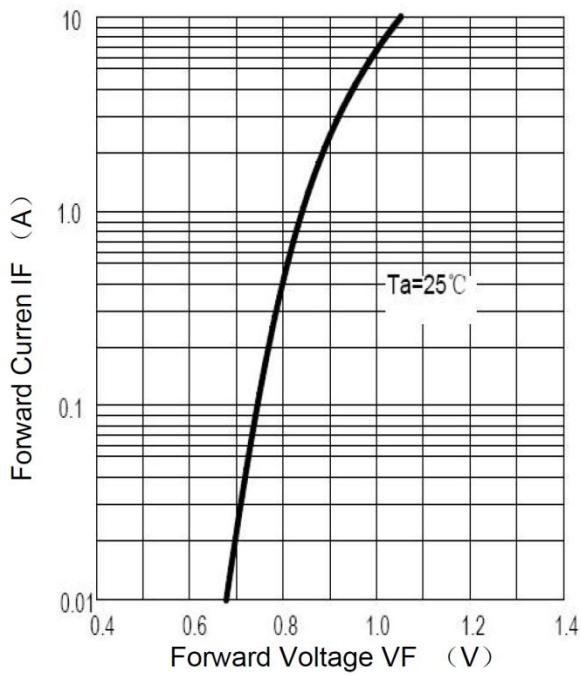
Parameter	Symbol	Conditions	BR1005	BR101	BR102	BR104	Unit
Repetitive peak reverse voltage	V <sub>RRM</sub>		50	100	200	400	V
RMS reverse voltage	V <sub>RMS</sub>		35	70	140	280	V
DC blocking voltage	V <sub>DC</sub>		50	100	200	400	V
Operating temperature	T <sub>j</sub>	-40 to 150	°C				
Storage temperature	T <sub>stg</sub>	-40 to 150	°C				

## Electrical characteristics at T<sub>A</sub> = 25 °C, unless otherwise specified

Single phase, half sine wave, 50 Hz, resistive load

For capacitive load derate current by 20%

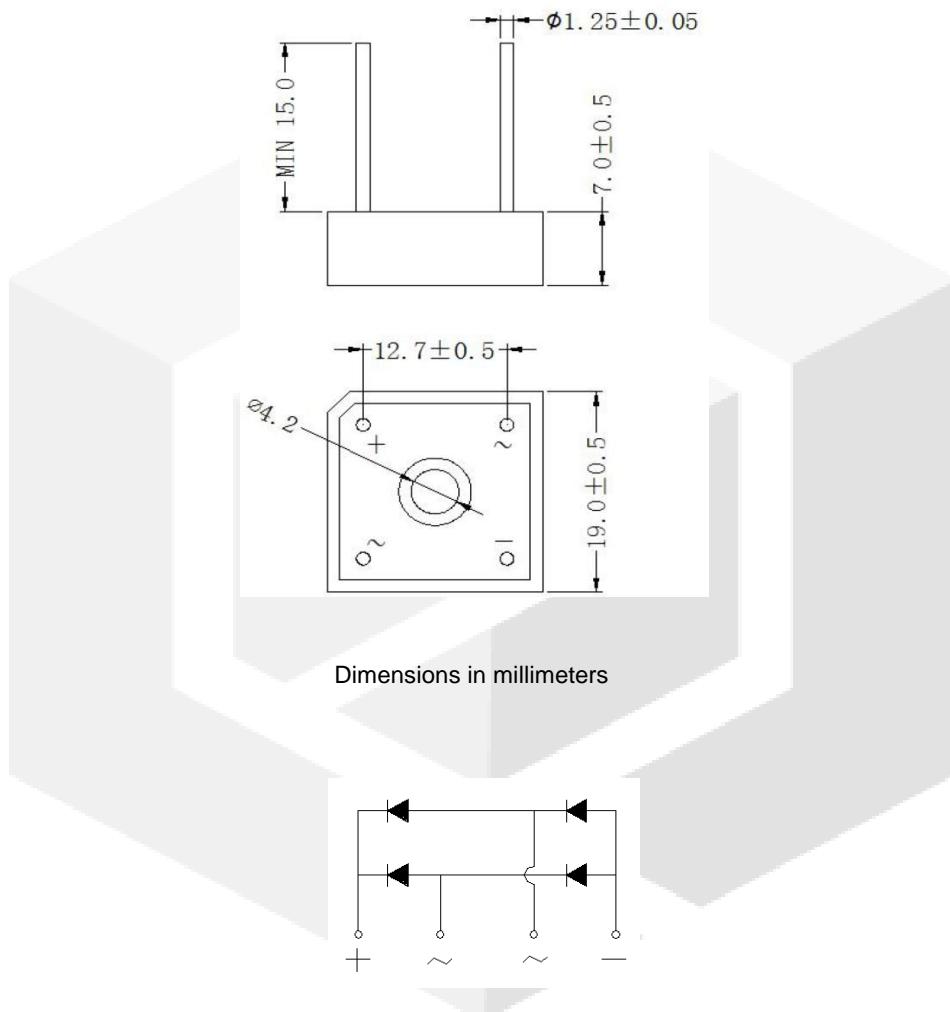
Parameter	Symbol	Conditions	BR1005	BR101	BR102	BR104	Unit
Maximum forward rectified current	I <sub>O</sub>	T <sub>A</sub> = 40 °C	10	10	10	10	A
Peak forward surge current	I <sub>FSM</sub>	t <sub>p</sub> = 8.3 ms	200	200	200	200	A
Maximum forward voltage drop	V <sub>F</sub>	I <sub>F</sub> = 5.0 A	1.05	1.05	1.05	1.05	V
Maximum reverse current at rated DC blocking voltage	I <sub>R</sub>	T <sub>A</sub> = 25 °C T <sub>A</sub> = 125 °C	10 500	10 500	10 500	10 500	μA
Rating for fusing	I <sup>2</sup> t	1 ms < t <sub>p</sub> < 10 ms, T <sub>j</sub> = 25 °C	166	166	166	166	A <sup>2</sup> s
Thermal resistance	R <sub>θJA</sub>		5	5	5	5	°C/W

**Fig.1 Current Derating Curve**

**Fig.2 Typical Reverse Characteristics**

**Fig.3 Max. Surge Current**

**Fig.4 Rated Forward Features**


## Package dimensions and terminal configuration

Product is marked with part number and terminal configuration.

**BR-10**



# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Bridge Rectifiers category:***

***Click to view products by GeneSiC Semiconductor manufacturer:***

Other Similar products are found below :

[MB2510](#) [MB252](#) [MB356G](#) [MB358G](#) [GBJ1504-BP](#) [GBU15J-BP](#) [GBU15K-BP](#) [GBU4A-BP](#) [GBU6B-E3/45](#) [GSIB680-E3/45](#) [DB101-BP](#)  
[DF01](#) [DF10SA-E345](#) [BU1508-E3/45](#) [KBPC50-10S](#) [RS405GL-BP](#) [G5SBA60-E3/51](#) [GBU10J-BP](#) [GBU6M](#) [GBU8D-BP](#) [GBU8J-BP](#)  
[2KBB10](#) [36MB140A](#) [TB102M](#) [MB1510](#) [MB258](#) [MB6M-G](#) [MB86](#) [TL401G](#) [MDA920A2](#) [TU602](#) [TU810](#) [MP501W-BP](#) [MP502-BP](#)  
[BR101-BP](#) [BR84DTP204](#) [BU2008-E3/51](#) [KBPC10/15/2501WP](#) [KBPC25-02](#) [DF06SA-E345](#) [DF1510S](#) [VS-40MT160PAPBF](#) [GBL02-E3/45](#)  
[GBU4G-BP](#) [GBJ2506-BP](#) [GBU6B-E3/51](#) [GSIB15A80-E3/45](#) [DB104-BP](#) [TB354](#) [70MT160KPBF](#)