

BRAIDED WIRE PROTECTION

Bulk tubular non-metallic braid for wire harness protection


102-001 and -002 expandable polyethylene tubular braid



EXPANDABLE POLYETHYLENE TUBULAR BRAID, WHITE (-001) AND BLACK (-002)



-001 White

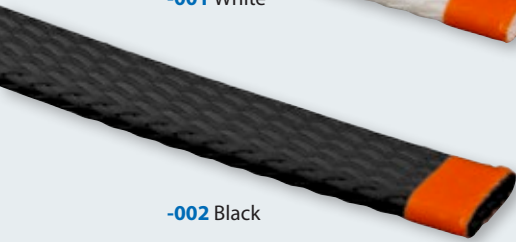

-002 Black



- **Monofilament polyethylene tubular braid**
- **-55° to +125°C temperature range**
- **50,000 PSI yield tensile strength**
- **20% elongation**
- **Good chemical resistance**
- **Good abrasion resistance**

How To Order				
Sample Part Number	102-001	-008	R	-645
Basic No.	102-001 white polyethylene braid 102-002 black polyethylene braid (see Table I)			
Braid Diameter No.	See Table II			
Tracer color option	G = green W = white R = red Y = yellow Omit for none			
Split braid option (-002 only)	-645 (add to 102-002 black braid part number only)			

Table I					
Product Series	Color	Material	Material Dia.	Wall Thickness Nominal	Temperature Range
102-001	White	Polyethylene Terephthalate	.010 (0.25)	.025 (0.6)	-65°F [-54°C] to +250°F [+121°C]
102-002	Black				

Table II					
Dash No.	Ø Nom.	Ref. wire bundle range		Approx. Weight (grams/ft.)	Wall thickness (nominal)
		Min	Max		
-004	.125 (3.2)	.090 (2.3)	.250 (6.4)	.7	.025 (0.6)
-006	.188 (4.8)	.109 (2.8)	.318 (8.1)	1.0	
-008	.250 (6.4)	.125 (3.2)	.375 (9.5)	1.4	
-012	.375 (9.5)	.312 (7.9)	.500 (12.7)	1.9	
-016	.500 (12.7)	.375 (9.5)	.750 (19.1)	3.0	
-020	.625 (15.9)	.375 (9.5)	1.000 (25.4)	3.1	
-024	.750 (19.1)	.500 (12.7)	1.250 (31.8)	3.3	
-032	1.000 (25.4)	.625 (15.9)	1.375 (34.9)	5.8	
-040	1.250 (31.8)	.750 (19.1)	1.500 (38.1)	7.0	
-048	1.500 (38.1)	.781 (19.8)	1.750 (44.5)	8.4	
-056	1.750 (44.5)	.859 (21.8)	1.938 (49.2)	10.1	
-064	2.000 (50.8)	.937 (23.8)	2.187 (55.5)	12.6	



Ideally suited for applications as diverse as rail transportation, marine, and military vehicles, our 102-001 and -002 polyethylene tubular braid is an economical choice with good general-purpose chemical and abrasion resistance. The monofilament material offers wide expandability for quick and easy installation over cable bundles and connectors.

NOTES

1. Material - polyethylene terephthalate, .010 (0.25) dia.
2. Temperature range -54°C to +125°C

B

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Spiral Wraps, Sleeves, Tubing & Conduit](#) category:

Click to view products by [Glenair](#) manufacturer:

Other Similar products are found below :

[601203-000](#) [CTA-0053](#) [8426-11](#) [8429-9](#) [8445-7.5](#) [8450](#) [120-104-24](#) [120-113-16B](#) [120-116-1-1-09BE](#) [120-116-1-1-09BF](#) [120-116-1-1-09BP](#)
[120-116-1-1-12BE](#) [120-116-1-1-12BP](#) [120-116-1-1-20BP](#) [120-116-1-1-32BE](#) [120-117-40](#) [120-123-06](#) [120-123-10](#) [120-123-14](#) [120-123-16](#)
[120-125-12BL](#) [120-125-12R](#) [120-125-16](#) [120-125-16R](#) [120-125-16Y](#) [120-125-20R](#) [120-125-24Y](#) [120-125-28](#) [120-125-28R](#) [120-125-32](#)
[120-125-32R](#) [120-125-40](#) [120-125-56](#) [120-126-09](#) [120-126-09BL](#) [120-126-12](#) [120-126-12BL](#) [120-126-14](#) [120-126-16](#) [120-126-16BL](#) [120-](#)
[126-20](#) [120-126-20BL](#) [120-126-20R](#) [120-126-24](#) [120-126-28](#) [120-126-32](#) [120-126-40BL](#) [120-126-52](#) [120-126-52BL](#) [120-104-12](#)