
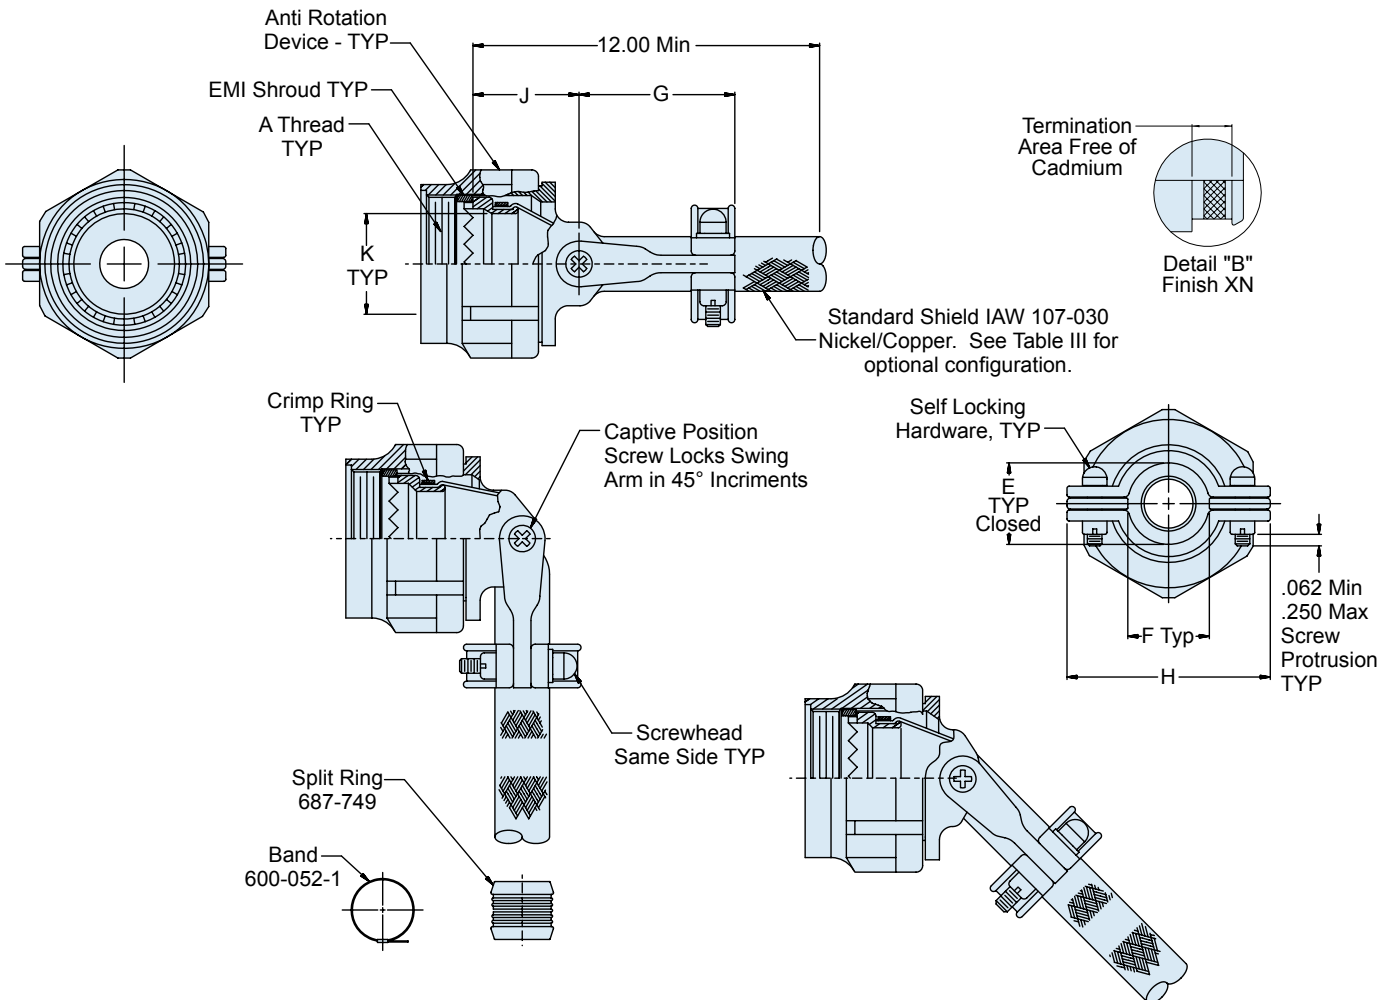


A

CONNECTOR DESIGNATOR:	
A	MIL-DTL-5015, -26482 Series II, and -83723 Series I and III
F	MIL-DTL-38999 Series I, II (see note 3)
H	MIL-DTL-38999 Series III and IV
SELF-LOCKING	
ROTATABLE COUPLING	

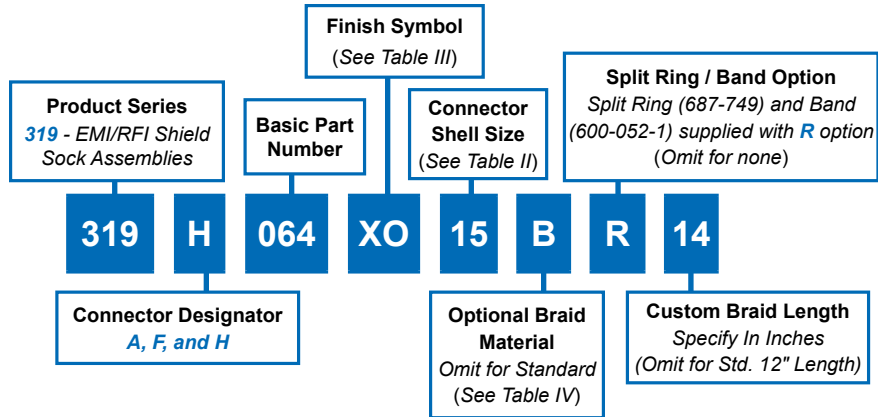

319-064 Composite Swing-Arm Backshell with Shield Sock and Self-Locking Rotatable Coupling



TABLE II: SHELL SIZE

Shell Size		E ± .031	F Min.	G Max.	H Max.	J ± .06	K Min. (H Code)	K Min. (A Code)	K Min. (F Code)
A, F	H								
08	09	.265 (6.7)	.22 (5.6)	1.06 (26.9)	.98 (24.9)	.94 (23.9)	.264 (6.7)	.265 (6.7)	.275 (7.0)
10	11	.310 (7.9)	.27 (6.9)	1.09 (27.7)	1.05 (26.7)	.97 (24.6)	.390 (9.9)	.370 (9.4)	.412 (10.5)
12	13	.390 (9.9)	.35 (8.9)	1.18 (30.0)	1.20 (30.5)	1.03 (26.2)	.504 (12.8)	.506 (12.9)	.526 (13.4)
14	15	.506 (12.9)	.47 (11.9)	1.24 (31.5)	1.30 (33.0)	1.09 (27.7)	.630 (16.0)	.580 (14.7)	.657 (16.7)
16	17	.591 (15.0)	.55 (14.0)	1.32 (33.5)	1.44 (36.6)	1.12 (28.4)	.756 (19.2)	.705 (17.9)	.776 (19.7)
18	19	.661 (16.8)	.62 (15.7)	1.39 (35.3)	1.56 (39.6)	1.15 (29.2)	.843 (21.4)	.784 (19.9)	.872 (22.1)
20	21	.744 (18.9)	.70 (17.8)	1.49 (37.8)	1.69 (42.9)	1.18 (30.0)	.969 (24.6)	.909 (23.1)	1.007 (25.6)
22	23	.826 (21.0)	.78 (19.8)	1.55 (39.4)	1.77 (45.0)	1.25 (31.8)	1.091 (27.7)	1.034 (26.3)	1.132 (28.8)
24	25	.896 (22.8)	.85 (21.6)	1.61 (40.9)	1.89 (48.0)	1.28 (32.5)	1.217 (30.9)	1.149 (29.2)	1.257 (31.9)

TABLE III: FINISH

Symbol	Finish
XB	Composite Material—No Plating, Color Black, Brass Interface Shroud and Adapter—Nickel Plated
XMT	2000 Hour Corrosion Resistant Ni-PTFE, Nickel-Fluorocarbon Polymer. <i>1000 Hour Grey™</i>
XN	Composite Material—No Plating, Color Black and Brown, Brass Interface Shroud and Adapter—Selectively Cadmium Plated (See Detail B)
XO	Composite Material—No Plating, Color Black and Brown, Brass Interface Shroud and Adapter—Nickel Plated

TABLE IV: BRAID TYPE

Symbol	Braid Type
A	100% AmberStrand®
B	75%/25% AmberStrand® Blend
L	100% ArmorLite™
<i>Standard</i>	Nickel/Copper 34awg
T	Tin/Copper 34awg

NOTES

1. See Table I in Intro for front-end dimensional details.
2. See composite thermoplastic shield sock assembly procedure for detailed installation instructions.
3. Add mod code -475 to end of part number for use with Series II connectors. Backshell to be supplied less shroud.
4. Coupling nut supplied unplated.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular MIL Spec Strain Reliefs & Adapters](#) category:

Click to view products by [Glenair](#) manufacturer:

Other Similar products are found below :

[896227-000](#) [899170S004](#) [0113-023-000](#) [6000-063-0022](#) [CS6624-000](#) [620AB038Z136](#) [620AS001Z108](#) [620AS038Z112](#) [620AS038Z120](#)
[620AS038Z132](#) [620FB038NF08](#) [620HA038NF09](#) [620HA038NF11](#) [620HA038NF13](#) [620HA038NF25](#) [620HB049NF17](#) [620HS038NF11](#)
[620HS038Z121](#) [620HS042XM19](#) [620HS042XM25](#) [620HS048B17](#) [620MS064NF12](#) [620MS065Z107](#) [620MS065ZNU06](#) [627-123NF21-11](#)
[627-125NF23-6](#) [630J041M06H](#) [630J041M20H](#) [637S010NF0212H](#) [637S010NF0416A](#) [640830-000](#) [659943-000](#) [66241-10A](#) [CW0597-000](#)
[CW0598-000](#) [CW0948-000](#) [CY0122-000](#) [M85049/41-6A W/B](#) [M85049/42-12DS](#) [M85049/47N8](#) [M85049/51-1-14S](#) [M85049/51S16S](#)
[M85049/60-1N16](#) [M85049/60-2G12W](#) [M85049/69-11N](#) [CZ3661-000](#) [D02922-000](#) [70.360.1628.0](#) [703797-000](#) [705825-000](#)