



Series 970 PowerTrip™ Connectors and Accessories
Accessories
930-014 Flange Mount Gaskets

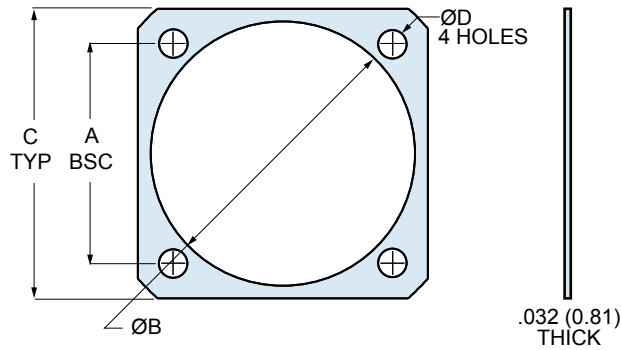

930-014 FLANGE MOUNT GASKETS

Flange mount gaskets protect equipment from moisture ingress and contamination. Conductive gaskets reduce EMI problems. These die-cut elastomeric gaskets fit Series 970 square flange connectors.



About Fluorosilicone

Fluorosilicone (FVMQ) offers excellent resistance to hydrocarbons, oils, petroleum fuels and greases. Suitable for use with mineral-based hydraulic fluids. Continuous operating temperature -60°C to +175°C, +200°C intermittent. Meets MIL-DTL-25988.

FLUOROSILICONE GASKETS

| Shell Size | Part Number | A Bsc. | | B Dia. | | C Typ. | | D Dia. | |
|------------|-------------|--------|-------|--------|-------|--------|-------|--------|------|
| | | In. | mm. | In. | mm. | In. | mm. | In. | mm. |
| 18 | 930-014F18 | 1.015 | 25.78 | 1.187 | 30.15 | 1.383 | 35.13 | .146 | 3.71 |
| 20 | 930-014F20 | 1.140 | 28.96 | 1.374 | 34.90 | 1.508 | 38.30 | .146 | 3.71 |
| 24 | 930-014F24 | 1.281 | 32.54 | 1.562 | 39.67 | 1.718 | 43.64 | .146 | 3.71 |
| 28 | 930-014F28 | 1.568 | 39.83 | 1.874 | 47.60 | 2.138 | 54.31 | .170 | 4.32 |
| 32 | 930-014F32 | 1.734 | 44.04 | 2.062 | 52.37 | 2.328 | 59.13 | .170 | 4.32 |
| 36 | 930-014F36 | 1.984 | 50.39 | 2.302 | 58.47 | 2.578 | 65.48 | .170 | 4.32 |
| 40 | 930-014F40 | 2.234 | 56.74 | 2.562 | 65.07 | 2.828 | 71.83 | .170 | 4.32 |

About Viton®

Viton® fluoroelastomer (FKM) offers excellent resistance to high temperatures, ozone and solvents. Continuous operating temperature -20°C to +200°C.

VITON® GASKETS

| Shell Size | Part Number | A Bsc. | | B Dia. | | C Typ. | | D Dia. | |
|------------|-------------|--------|-------|--------|-------|--------|-------|--------|------|
| | | In. | mm. | In. | mm. | In. | mm. | In. | mm. |
| 18 | 930-014V18 | 1.015 | 25.78 | 1.187 | 30.15 | 1.383 | 35.13 | .146 | 3.71 |
| 20 | 930-014V20 | 1.140 | 28.96 | 1.374 | 34.90 | 1.508 | 38.30 | .146 | 3.71 |
| 24 | 930-014V24 | 1.281 | 32.54 | 1.562 | 39.67 | 1.718 | 43.64 | .146 | 3.71 |
| 28 | 930-014V28 | 1.568 | 39.83 | 1.874 | 47.60 | 2.138 | 54.31 | .170 | 4.32 |
| 32 | 930-014V32 | 1.734 | 44.04 | 2.062 | 52.37 | 2.328 | 59.13 | .170 | 4.32 |
| 36 | 930-014V36 | 1.984 | 50.39 | 2.302 | 58.47 | 2.578 | 65.48 | .170 | 4.32 |
| 40 | 930-014V40 | 2.234 | 56.74 | 2.562 | 65.07 | 2.828 | 71.83 | .170 | 4.32 |

About Conductive Fluorosilicone

High performance silver-filled fluorosilicone has excellent corrosion resistance in harsh environments. 90 dB plane wave shielding effectiveness at 10GHz, continuous operating temperature -55°C to +160°C, resistant to solvents and fuels. Material meets MIL-DTL-83528 Type D.

CONDUCTIVE FLUOROSILICONE GASKETS

| Shell Size | Part Number | A Bsc. | | B Dia. | | C Typ. | | D Dia. | |
|------------|-------------|--------|-------|--------|-------|--------|-------|--------|------|
| | | In. | mm. | In. | mm. | In. | mm. | In. | mm. |
| 18 | 930-014X18 | 1.015 | 25.78 | 1.187 | 30.15 | 1.383 | 35.13 | .146 | 3.71 |
| 20 | 930-014X20 | 1.140 | 28.96 | 1.374 | 34.90 | 1.508 | 38.30 | .146 | 3.71 |
| 24 | 930-014X24 | 1.281 | 32.54 | 1.562 | 39.67 | 1.718 | 43.64 | .146 | 3.71 |
| 28 | 930-014X28 | 1.568 | 39.83 | 1.874 | 47.60 | 2.138 | 54.31 | .170 | 4.32 |
| 32 | 930-014X32 | 1.734 | 44.04 | 2.062 | 52.37 | 2.328 | 59.13 | .170 | 4.32 |
| 36 | 930-014X36 | 1.984 | 50.39 | 2.302 | 58.47 | 2.578 | 65.48 | .170 | 4.32 |
| 40 | 930-014X40 | 2.234 | 56.74 | 2.562 | 65.07 | 2.828 | 71.83 | .170 | 4.32 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular MIL Spec Tools, Hardware & Accessories](#) *category:*

Click to view products by [Glenair](#) *manufacturer:*

Other Similar products are found below :

[0113-201-2025](#) [600-079-06](#) [600-146-06](#) [M10-101982-143](#) [M10-101982-163](#) [M10-101983-183](#) [M10-150912-083](#) [M10-454396-008](#)
[602GB18808](#) [CS3102A-22-14PW](#) [M2887615-CD](#) [627-009](#) [M38999/9-19B](#) [630A007NF083A](#) [630B007M051A](#) [630BJ003NF032H](#) [637-](#)
[149NF04B](#) [M39029/29-215](#) [6408-203V-09273](#) [6426-201-11343](#) [650FS002NF16](#) [660-008NF14S7-01](#) [660-009M22H8-03](#) [660-013NF19U6-](#)
[210](#) [660-015M10S6-17](#) [660-015NF10S5-01](#) [660-015NF14R3.5-01](#) [660-023NF19H6-19](#) [660-024NF11S12-01](#) [660-024NF11S3-01](#) [660-](#)
[024NF17S4-109](#) [660-050XM17F4-01](#) [660-068NF25R6-30G](#) [660-070M23S8-04](#) [660-073MTCH9-20](#) [M83723/61-18W](#) [M83723/61-218R](#)
[M83723/61-224W](#) [667-084-23C](#) [667-084-35C](#) [667-224NF16](#) [687-697NF-1](#) [M85049/94-10-A](#) [M85049/96-7-A](#) [M855282-10A01A](#)
[M85528/2-10B](#) [M855282-18A01A](#) [M85528/2-22A01A](#) [M85528/2-22AA](#) [710HS460NF2508](#)