HiPer-D® Contacts and Tools

#22 crimp contacts for high density HiPer-D® connectors

#22 CRIMP CONTACTS





Material and Finish

Copper alloy, 50 microinches gold plated per ASTM B488 Type II Code C Class 1,27 over nickel plate per QQ-N-290 Class 2, 50-150 microinches.

Socket contact hood: 305 CRES, passivated.

Specifications

AWG Wire Accommodation: #22 - #28
Current Rating: 5 Amps maximum
Voltage Drop (at 5 Amps and 25° C, #22 AWG silver-plated wire): 73 mV. maximum
Temperature Range: -65° to + 200° C.
Socket Minimum Sep. Force: 0.7 ounces

Socket Minimum Sep. Force: 0.7 ounces See SAE AS39029 for additional electrical, mechanical and environmental specifications.

Crimp Tools and Insertion/ Removal Tools


Crimper: 809-015 (M22520/2-01) Positioner: Pin 859-018 (M22520/2-09) Socket 859-019 (M22520/2-06)


Insertion/Removal Tool: 859-020 (M81969/14-01)

Crimp Tensile Strength					
Axial load in minimum pounds.					
Wire Gage	Silver or Tin Coated Copper Wire	Nickel Coated Copper Wire			
#22	12	8			
#24	8	6			
#26	5	3			
#28	3	2			

#22 contacts accept #22 to #28 AWG wire. These gold-plated copper alloy contacts meet the requirements of SAE AS39029. Use with all Series 28 HiPer-D® crimp connectors with size #22 cavities.

Contact Type	Fig.	Wire Size	Part Number	M39029 Part Number
Pin	1	#22-28	850-002-22-360	M39029/58-360
Socket	2	#22-28	850-003-22-354	M39029/57-354

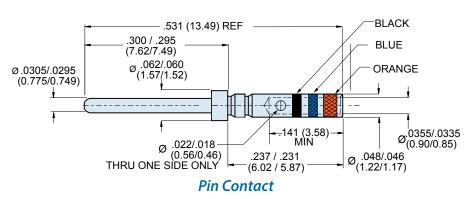

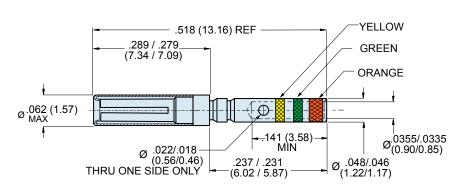

Socket Contact

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Circular MIL Spec Contacts category:

Click to view products by Glenair manufacturer:

Other Similar products are found below:

006-1189-20 71-VEAM 809-023 809-111 811393-000 850-014 97-45-1418P-5(920) 97-45-1418S-4 D-602-0106CS076 AIC12-14P

AIC16-16PG AIC8-12P AIC8-8SG AIC8-8SRAD 1495044-1 BACC47CP2T BACC47CP3S BACC47DP4 BACC47GC1A BACC47GN1

16968/2C 173-900245-91 241611N001 2560-220-2031 27915-38T9 27964-38T112 2M809-118 97-67-36-20 AIC12-16P AIC16-14SG

AIC16-18PG AIC16-18S AIC16-20PG AIC4-4PG CE102S-18 M39029/30-221 M39029/77-430 416-2020-088I MDM-21SH003B-F222

BA-4120-50LD BACC47CN2 BACC47GC3A BACC47GD3A BACC47GM1 52G137 REV A CB2-18-21PS D-602-1116CS2727 D-602
1117CS2727 419-2082-102 419-2085-102