

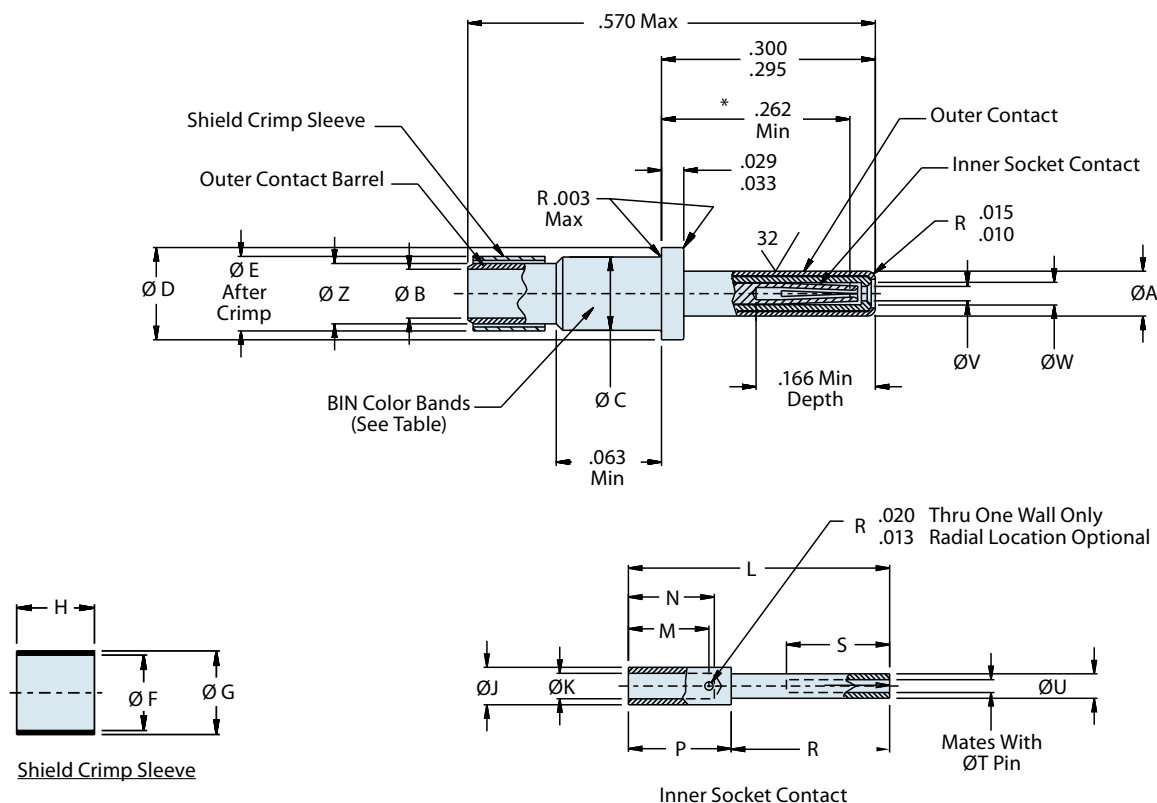
D38999

Ser. I, II, III, IV

**Size #16 Coaxial Pin Contacts for MIL-DTL-38999 Series I, II, III and IV Connectors**


These #16 pin contacts accept 50 ohm and 75 ohm coaxial cable. Inner contact is rated at 1 amp, the outer contact 12 amps. DWV rating is 800 Vac rms sea level, 250 Vac at 50,000 feet. Contacts are packaged individually and are unassembled with instruction sheet. One contact consists of outer contact, fluorocarbon dielectric, inner contact and shield crimp sleeve. Inner and outer contacts are gold-plated copper alloy. Approved to SAE AS39029. VSWR rating 1.5:1 maximum up to 700 MHz. 5000 megohm insulation resistance. Mates with: M39029/77 and /78.

B


**Material and Finish**

Contact Body: Copper Alloy/Gold Plated  
 Center Contact: Copper Alloy/Gold Plated  
 Crimp Sleeve: Copper Alloy/Gold Plated  
 Insulator: Teflon

\* Indicates point at which a square ended pin of the same basic diameter as the mating contact first engages the outer contact spring

**M39029/76**  
**852-008**  
**Size 16 Coaxial Pin**



Type	Cable Accommodation	Part Number	Military Part Number	Color Band		
				1st	2nd	3rd
Pin	M17/119-RG174, M17/113-RG316, M17/094-RG179, Times AA3248, Teledyne 11299, Haveg 8100207, Thermax 75-738-BCCWXE, Tensolite 3088/L707YX-1	<b>852-008-16-424</b>	M39029/76-424	Yellow	Red	Yellow
	M19/093-RG178	<b>852-008-16-425</b>	M39029/76-425	Yellow	Red	Green
	Haveg 61-02051, Revere WH95623	<b>852-008-16-426</b>	M39029/76-426	Yellow	Red	Blue
	Haveg 30-00761, Haveg 30-02024, Haveg 30-02033, Tensolite 24713/A955KK1, Tensolite 26723/A955KK1	<b>852-008-16-427</b>	M39029/76-427	Yellow	Red	Violet

Table I											
BIN Code	ØA	ØB Min	ØC	ØD	ØE Max	ØF Min	ØG Max	H	ØJ Max	ØK Min	ØL Ref
424	.0635 (1.61) .0615 (1.56)	.0670 (1.7018)	.103 (2.62) .101 (2.57)	.130 (3.3) .127 (3.2)	0.108 (2.7)	0.105 (2.7)	0.120 (3.0)	.105 (2.7) .095 (2.4)	0.046 (1.2)	.0210 (0.5)	.392 (10.0)
425	.0635 (1.61) .0615 (1.56)	.0575 (1.4605)	.103 (2.62) .101 (2.57)	.130 (3.3) .127 (3.2)	0.108 (2.7)	0.094 (2.4)	0.120 (3.0)	.105 (2.7) .095 (2.4)	0.046 (1.2)	.0210 (0.5)	.392 (10.0)
426	.0635 (1.61) .0615 (1.56)	.0670 (1.7018)	.103 (2.62) .101 (2.57)	.130 (3.3) .127 (3.2)	0.108 (2.7)	0.105 (2.7)	0.120 (3.0)	.105 (2.7) .095 (2.4)	0.052 (1.3)	.0355 (0.9)	.392 (10.0)
427	.0635 (1.61) .0615 (1.56)	.0575 (1.4605)	.103 (2.62) .101 (2.57)	.130 (3.3) .127 (3.2)	0.108 (2.7)	0.094 (2.4)	0.120 (3.0)	.105 (2.7) .095 (2.4)	0.046 (1.2)	.0270 (0.7)	.392 (10.0)

Table I (continued)										
BIN Code	M	N Min	P	R	S Min	T	U	ØV	ØW	ØZ Max
424	.094 (2.4) .087 (2.2)	0.103 (2.6)	.125 (3.2) .119 (3.0)	.271 (6.9) .269 (6.8)	0.156 (4.0)	.0155 (.39) .0145 (.37)	.030 (.8) .028 (.7)	.022 (.6) .018 (.5)	.041 (1.04) .038 (.097)	0.085 2.2
425	.094 (2.4) .087 (2.2)	0.103 (2.6)	.125 (3.2) .119 (3.0)	.271 (6.9) .269 (6.8)	0.156 (4.0)	.0155 (.39) .0145 (.37)	.030 (.8) .028 (.7)	.022 (.6) .018 (.5)	.041 (1.04) .038 (.097)	0.076 1.9
426	.094 (2.4) .087 (2.2)	0.103 (2.6)	.125 (3.2) .119 (3.0)	.271 (6.9) .269 (6.8)	0.156 (4.0)	.0155 (.39) .0145 (.37)	.030 (.8) .028 (.7)	.022 (.6) .018 (.5)	.041 (1.04) .038 (.097)	0.085 2.2
427	.094 (2.4) .087 (2.2)	0.103 (2.6)	.125 (3.2) .119 (3.0)	.271 (6.9) .269 (6.8)	0.156 (4.0)	.0155 (.39) .0145 (.37)	.030 (.8) .028 (.7)	.022 (.6) .018 (.5)	.041 (1.04) .038 (.097)	0.076 1.9

Table III					
Inner Contact		Outer Contact		Insertion Tool	Extraction Tool
Basic Crimping Tool	Positioner	Basic Crimping Tool	Positioner		
M22520/2-01	M22520/2-35	M22520/4-01	M22520/4-02	M81969/8-07 or M81969/14-03	M81969/8-08 or M81969/14-03

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Circular MIL Spec Contacts](#) category:*

*Click to view products by [Glenair](#) manufacturer:*

Other Similar products are found below :

[006-0984-20](#) [006-1186-20](#) [601101N004](#) [CT0E20-22SS](#) [CT1N20-23SS](#) [CT2-36-10PCAU](#) [CT6F36-10PCA152](#) [M39029/106-616](#) [M39029/18-179](#) [M39029/30-222](#) [M39029/31-235](#) [M39029/48-318](#) [M39029/73-397](#) [M39029/9-133](#) [M39029/9-134](#) [M5000-054-0020L](#) [M5100-057-2162](#) [809-023](#) [809-111](#) [811393-000](#) [850-014](#) [FRCIR01-20-4S-F80-VO](#) [900062-6-8L](#) [97-45-1418P-5\(920\)](#) [97-45-1418S-4](#) [97-45-1622P-5](#) [97-45-1622S-4\(920\)](#) [97-45-1622S-5](#) [97-55-1622S-5](#) [D-602-0104CS076](#) [D-602-0106CS076](#) [AIC12-10P](#) [AIC12-12SG](#) [AIC12-14P](#) [AIC16-16PG](#) [AIC16-2024SG](#) [AIC16S-16PG](#) [AIC8-12P](#) [AIC8-12S](#) [AIC8-8SG](#) [AIC8-8SRAD](#) [1495044-1](#) [BA-4016-50LD](#) [162GB-149-20000-05](#) [BACC47CP2T](#) [BACC47DP4](#) [BACC47GC1A](#) [BACC47GN1](#) [173-900245-91](#) [CA02R28-12PA152F80](#)