


PB-105M

4560 TIE-POINT, EXTERNALLY POWERED SOLDERLESS BREADBOARD

Applications

The PB-105M Externally Powered Solderless Breadboard is a great way to prototype low frequency or DC powered circuits. It is ideal for:

- Educational labs
- Hobbyists

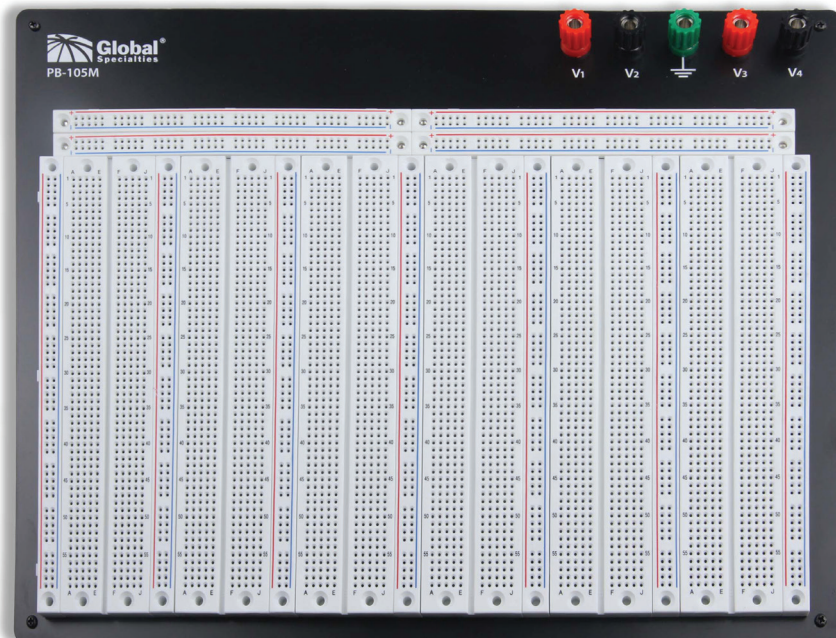

Features

- Comes fully assembled
- Externally powered
- 4560 Tie-points
- 5 Binding posts
- 19 mm standard spaced binding posts
- ABS plastic body
- Square hole style
- Fits 0.4-0.7 mm wire diameter
- Fits 42 total 16-pin ICs
- Nickel plated phosphor bronze spring clip contacts
- Rubber feet
- Aluminum back plate
- Measures 30.5 x 24 x 2.7 cm
- Weighs 900 g
- Maximum current capacity of 1.5 A at 36 V
- RoHS compliant
- Three-year warranty

**Global**[®]
Specialties
A Cal Test Electronics Company

22820 Savi Ranch Parkway
Yorba Linda, CA 92887
800-572-1028
globalspecialties.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [PCBs & Breadboards](#) category:

Click to view products by [Global Specialties](#) manufacturer:

Other Similar products are found below :

[8004](#) [8007](#) [8016](#) [8017](#) [8028](#) [8029](#) [1268-12](#) [1268-10](#) [1320833-1](#) [923252-R](#) [3410](#) [3396](#) [15107](#) [15101](#) [8006](#) [8015](#) [8018](#) [8019](#) [8020](#) [1268-19](#)
[1268-20](#) [8026](#) [1239-19](#) [SBBTH1520-1](#) [SBBTH1506-1](#) [SBBTH4080-1](#) [SBBTH3030-1](#) [SBBTH1508-1](#) [SBBSM2120-1](#) [SBB2808-1](#)
[SBB2805-1](#) [SBB1605-1](#) [SBB1602-1](#) [SBB1005-1](#) [SBB1002-1](#) [3426](#) [32P15WE](#) [ZAS1X206203XRPU160](#) [SBBTH3040-1](#) [SBB0004-1](#)
[SBB830-QTY10](#) [7115](#) [923749-I](#) [RE013-LF](#) [RE014-LF](#) [RE1210-LF](#) [RE200-C3](#) [RE210-S1](#) [RE317-HP](#) [RE438-LF](#)