

Description

The GC11N70 uses advanced super junction technology and design to provide excellent $R_{DS(ON)}$ and low gate charge. This device is suitable for industry AC-DC SMPS requirement of PFC, AC/DC power conversion, and other industrial power application.


General Features

- New technology for high voltage device
- Low on-resistance and low conduction losses
- Small Package
- Ultra Low Gate Charge cause lower driving requirement
- 100% Avalanche Tested
- RoHS Compliant


Application

- Power Factor Correction (PFC)
- Switched Mode Power Supply (SMPS)
- Uninterruptible Power Supply (UPS)

| | | |
|----------|-----------------------------|-------|
| V_{DS} | $R_{DS(ON)}$ @ 10V (max) | I_D |
| 700V | 395mΩ | 11A |



Schematic Diagram

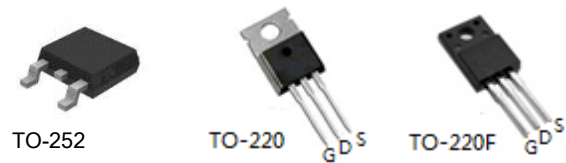

Marking and Pin Assignment

Ordering Information

| Part Number | Marking | Case | Packaging |
|-------------|---------|---------|---------------|
| GC11N70K | GC11N70 | TO-252 | 25000pcs/Reel |
| GC11N70T | GC11N70 | TO-220 | 50pcs/Tube |
| GC11N70F | GC11N70 | TO-220F | 50pcs/Tube |

Absolute Maximum Ratings ($T_C=25^\circ\text{C}$ unless otherwise noted)

| Parameter | Symbol | Value | | Unit |
|---|----------------|------------------|---------|------------------|
| | | TO-252 TO-220 | TO-220F | |
| Drain-Source Voltage | V_{DS} | 700 | | V |
| Gate-Source Voltage | V_{GS} | ±30 | | V |
| Drain Current-Continuous ($T_C=25^\circ\text{C}$) | I_D | 11 | | A |
| Drain Current-Continuous ($T_C=100^\circ\text{C}$) | I_D | 6.6 | | A |
| Drain Current-Pulsed (Note 1) | I_{DM} | 33 | | A |
| Single Pulse Avalanche Energy (Note 2) | E_{AS} | 215 | | mJ |
| Repetitive Avalanche Energy (Note 1) | E_{AR} | 0.32 | | mJ |
| Avalanche Current (Note 1) | I_{AR} | 1.8 | | A |
| Maximum Power Dissipation ($T_C=25^\circ\text{C}$) | P_D | 83 | 31 | W |
| MOSFET dv/dt ruggedness, $V_{DS} = 0 \dots 480\text{V}$ | dv/dt | 50 | | V/ns |
| Reverse diode dv/dt, $V_{DS} = 0 \dots 480\text{V}$, $I_{SD} \leq I_D$ | dv/dt | 15 | | V/μs |
| Operating Junction and Storage Temperature Range | T_J, T_{STG} | -55 To 150 | | $^\circ\text{C}$ |

Thermal Characteristic

| Parameter | Symbol | Value | | Unit |
|---|------------|------------------|---------|------|
| | | TO-252 TO-220 | TO-220F | |
| Thermal Resistance,Junction-to-Case | R_{thJC} | 1.5 | 4 | °C/W |
| Thermal Resistance,Junction-to-Ambient (Note 2) | R_{thJA} | 62 | 80 | °C/W |

Electrical Characteristics ($T_A=25^\circ\text{C}$ unless otherwise noted)

| Parameter | Symbol | Condition | Min | Typ | Max | Unit |
|---|--------------|--|-----|------|-----------|------------|
| On/ Off Characteristics | | | | | | |
| Drain-Source Breakdown Voltage | BV_{DSS} | $V_{GS}=0V, I_D=250\mu A$ | 700 | - | - | V |
| Zero Gate Voltage Drain Current ($T_C=25^\circ\text{C}$) | I_{DSS} | $V_{DS}=700V, V_{GS}=0V$ | - | - | 1 | μA |
| Zero Gate Voltage Drain Current ($T_C=125^\circ\text{C}$) | I_{DSS} | $V_{DS}=700V, V_{GS}=0V$ | - | - | 100 | μA |
| Gate-Body Leakage Current | I_{GSS} | $V_{GS}=\pm 30V, V_{DS}=0V$ | - | - | ± 100 | nA |
| On Characteristics (Note 3) | | | | | | |
| Gate Threshold Voltage | $V_{GS(th)}$ | $V_{DS}=V_{GS}, I_D=250\mu A$ | 2.5 | - | 4.5 | V |
| Drain-Source On-State Resistance | $R_{DS(ON)}$ | $V_{GS}=10V, I_D=5.5A$ | - | - | 395 | m Ω |
| Gate resistance | R_G | $f = 1.0\text{MHz}$ open drain | - | 18 | - | Ω |
| Dynamic Characteristics (Note4) | | | | | | |
| Input Capacitance | C_{iss} | $V_{DS}=100V, V_{GS}=0$ $V, F=1.0\text{MHz}$ | - | 871 | - | PF |
| Output Capacitance | C_{oss} | | - | 37 | - | PF |
| Reverse Transfer Capacitance | C_{rss} | | - | 5 | - | PF |
| Switching Characteristics (Note 4) | | | | | | |
| Turn-on Delay Time | $t_{d(on)}$ | $V_{DD}=400V, I_D=11A$ $V_{GS}=10V, R_{GEN}=25\Omega$ | - | 70 | - | ns |
| Turn-on Rise Time | t_r | | - | 70 | - | ns |
| Turn-Off Delay Time | $t_{d(off)}$ | | - | 145 | - | ns |
| Turn-Off Fall Time | t_f | | - | 59 | - | ns |
| Total Gate Charge | Q_g | $V_{DD}=520V, I_D=11A, V_{GS}=10V$ | - | 22 | - | nC |
| Gate-Source Charge | Q_{gs} | | - | 4 | - | nC |
| Gate-Drain Charge | Q_{gd} | | - | 8 | - | nC |
| Drain-Source Diode Characteristics | | | | | | |
| Continuous Body Diode Current | I_S | $T_C=25^\circ\text{C}$ | - | - | 11 | A |
| Pulsed Diode Forward Current | I_{SM} | $T_C=25^\circ\text{C}$ | - | - | 33 | A |
| Diode Forward Voltage | V_{SD} | $T_J=25^\circ\text{C},$ $I_{SD}=11A, V_{GS}=0V$ | - | - | 1.2 | V |
| Reverse Recovery Time | t_{rr} | $V_R=400V, I_F=I_S,$ $di_F/dt = 100A/\mu s$ | - | 377 | - | ns |
| Reverse Recovery Charge | Q_{rr} | | - | 3.4 | - | μC |
| Peak Reverse Recovery Current | I_{rrm} | | - | 17.8 | - | A |

Notes:

1. Repetitive Rating: Pulse width limited by maximum junction temperature.
2. $I_{AS} = 1.8A, V_{DD} = 50V, R_G = 25\Omega, \text{Starting } T_J = 25^\circ\text{C}$
3. Pulse Test: Pulse Width $\leq 300\mu s, \text{Duty Cycle } \leq 1\% .$
4. Guaranteed by design, not subject to production

Typical Electrical And Thermal Characteristics

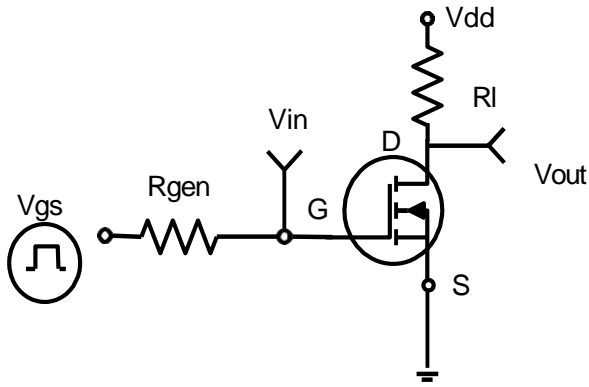


Figure 1. Switching Test Circuit

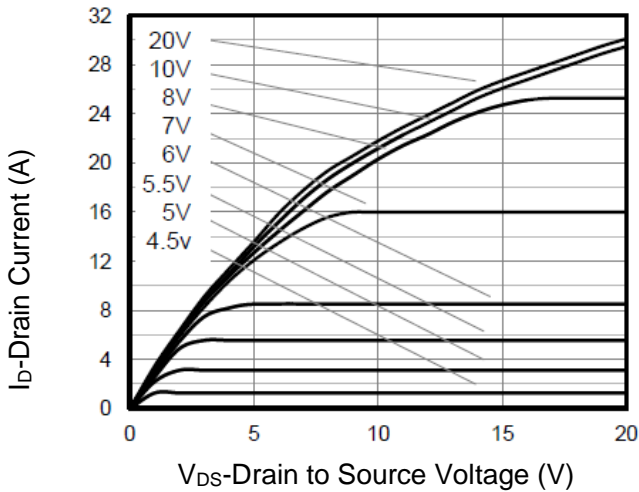


Figure 3. Output Characteristics

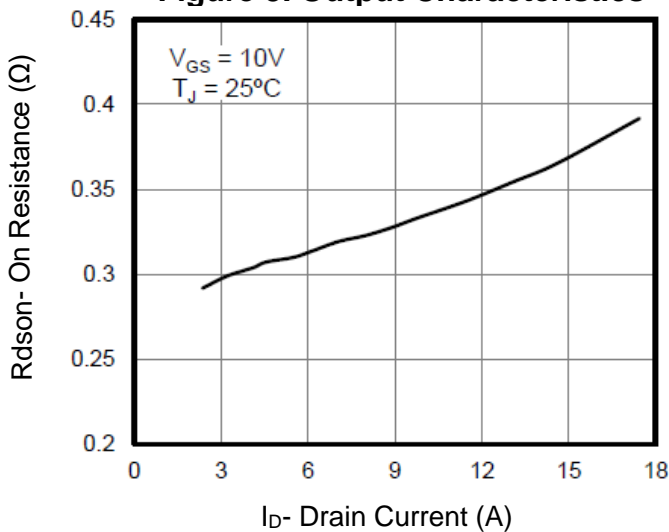


Figure 5. On Resistance vs. Drain Current

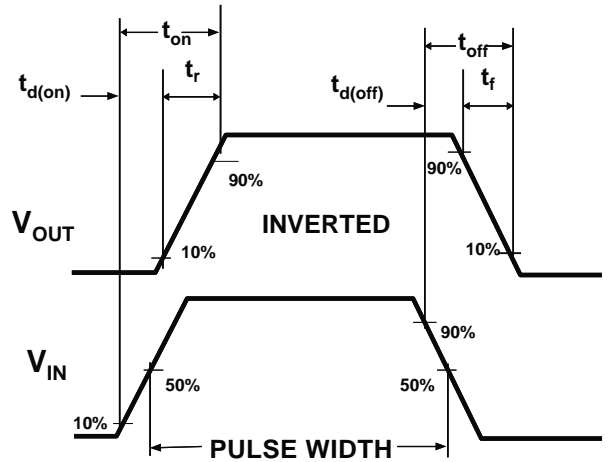


Figure 2. Switching Waveforms

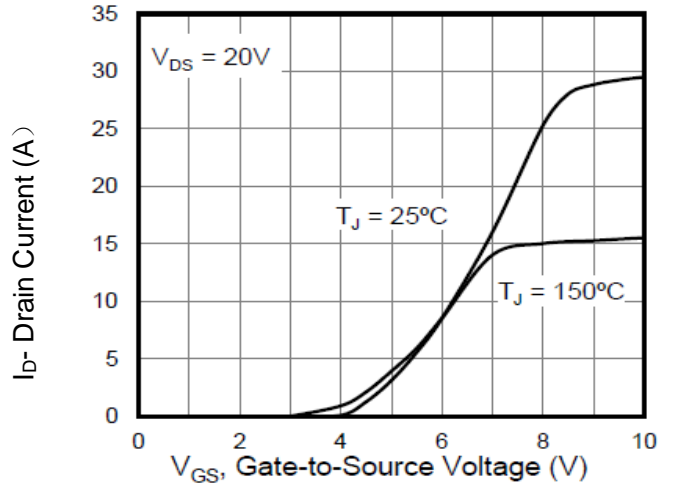


Figure 4. Transfer Characteristics

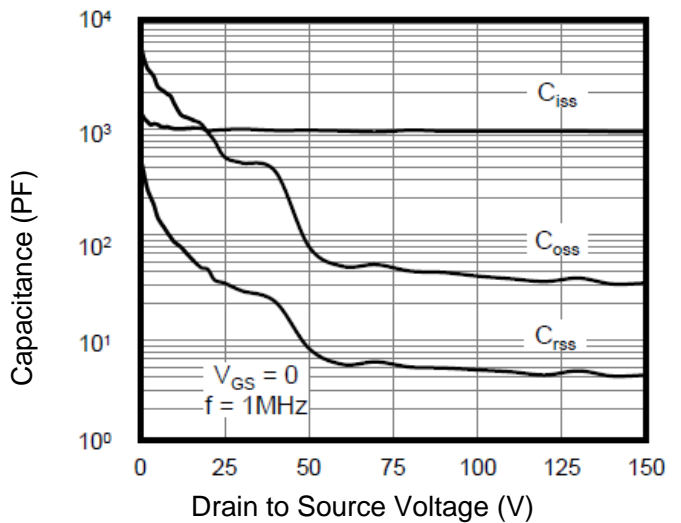


Figure 6. Capacitance

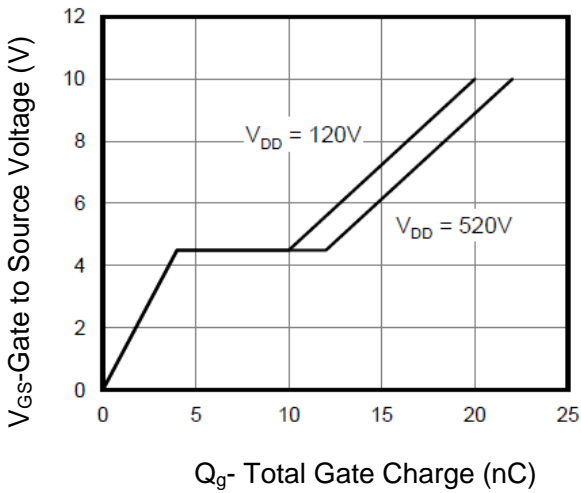


Figure 7. Gate Charge

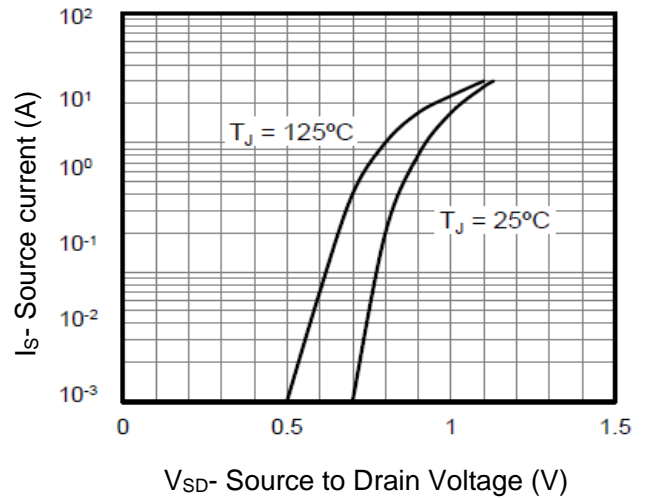


Figure 8. Body Diode Forward Voltage

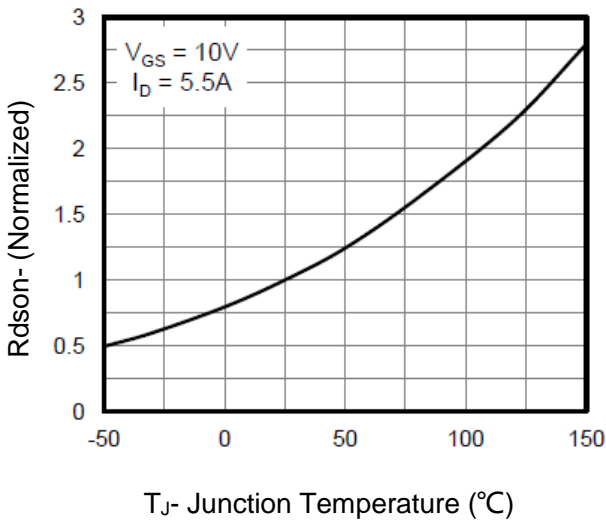


Figure 9. On- Resistance vs. Junction Temperature

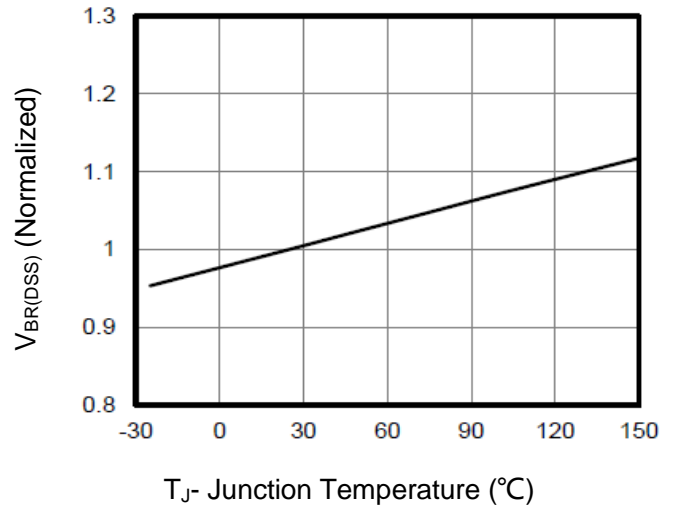


Figure 10. Breakdown Voltage vs. Junction Temperature

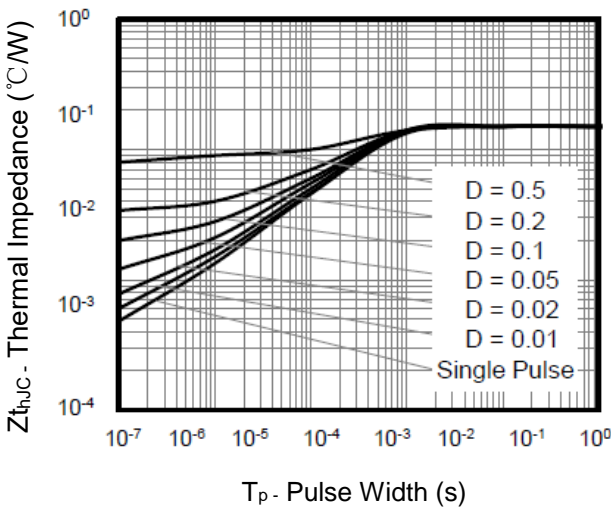


Figure 11. Transient Thermal Impedance (TO-252/TO-220)



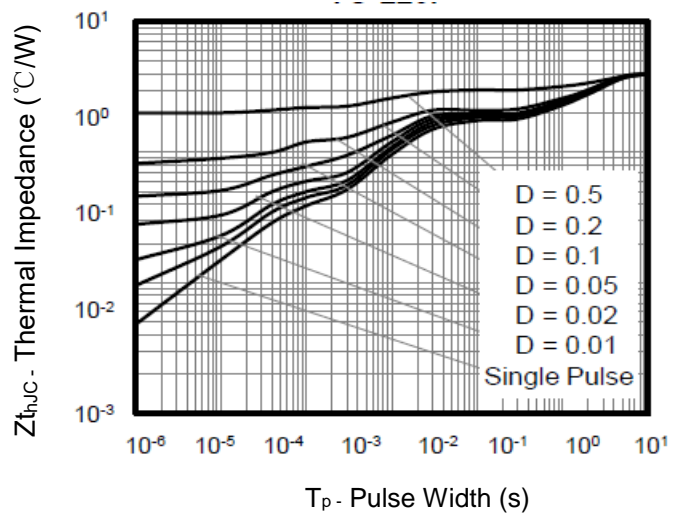


Figure 12. Transient Thermal Impedance (TO-220F)

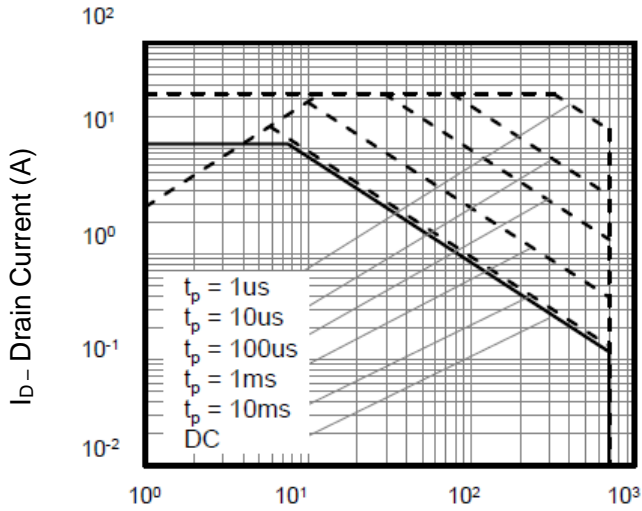

V_{DS} - Drain to Source voltage (V)


Figure 13. Safe Operation Area for TO-252/TO-220

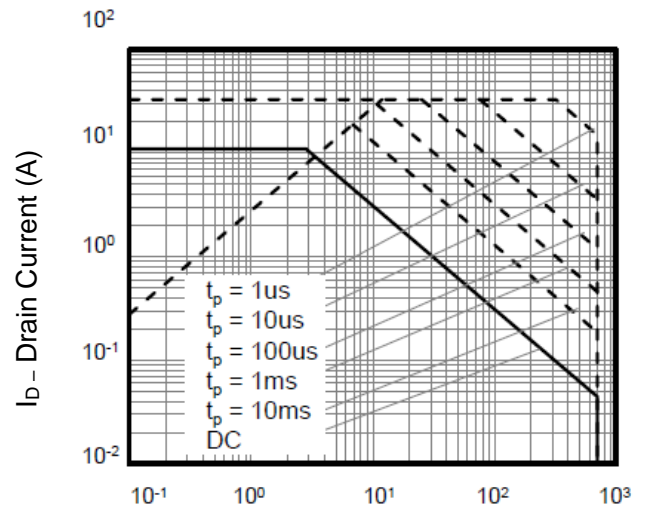

V_{DS} - Drain to Source Voltage (V)

Figure 14. Safe Operation Area for TO-220F


TO-252 Package information

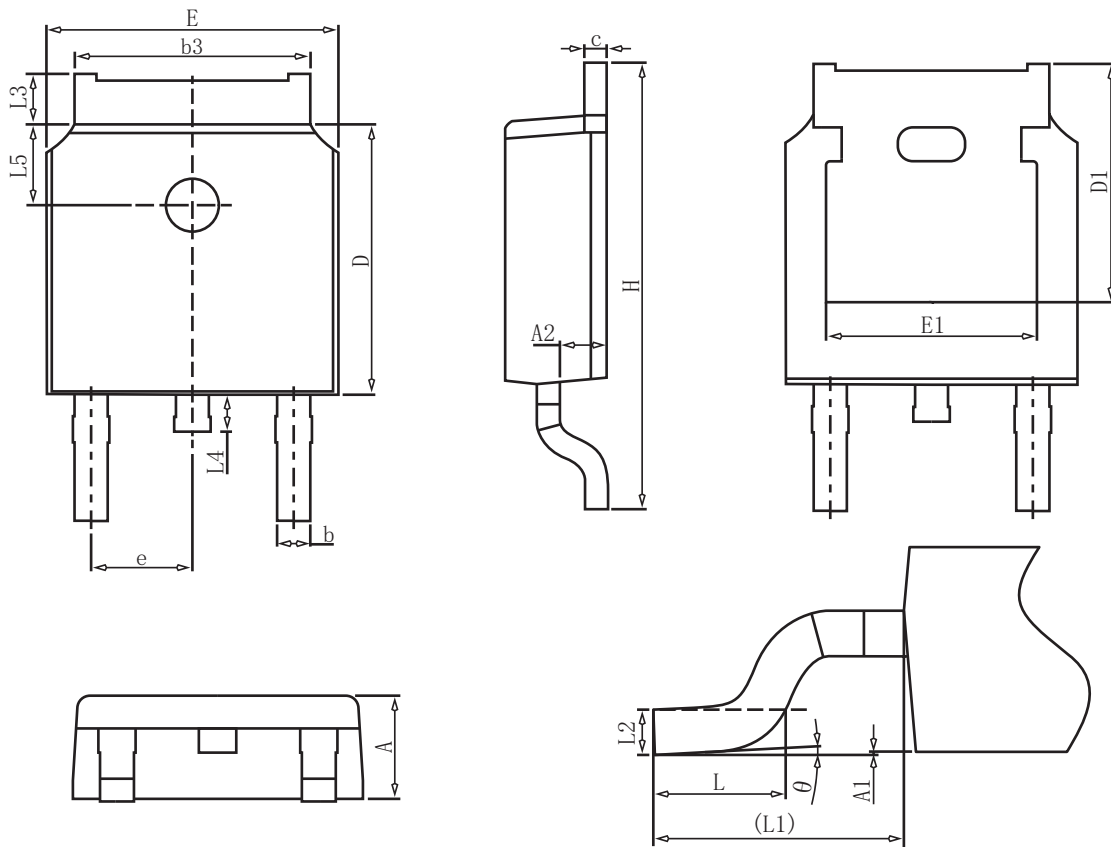

COMMON DIMENSIONS

| SYMBOL | mm | | |
|--------|----------|-------|-------|
| | MIN | NOM | MAX |
| A | 2.20 | 2.30 | 2.40 |
| A1 | 0.00 | - | 0.20 |
| A2 | 0.97 | 1.07 | 1.17 |
| b | 0.68 | 0.78 | 0.90 |
| b3 | 5.20 | 5.33 | 5.50 |
| c | 0.43 | 0.53 | 0.63 |
| D | 5.98 | 6.10 | 6.22 |
| D1 | 5.30REF | | |
| E | 6.40 | 6.60 | 6.80 |
| E1 | 4.63 | - | - |
| e | 2.286BSC | | |
| H | 9.40 | 10.10 | 10.50 |
| L | 1.38 | 1.50 | 1.75 |
| L1 | 2.90REF | | |
| L2 | 0.51BSC | | |
| L3 | 0.88 | - | 1.28 |
| L4 | 0.50 | - | 1.00 |
| L5 | 1.65 | 1.80 | 1.95 |
| θ | 0° | - | 8° |


TO-220 Package information

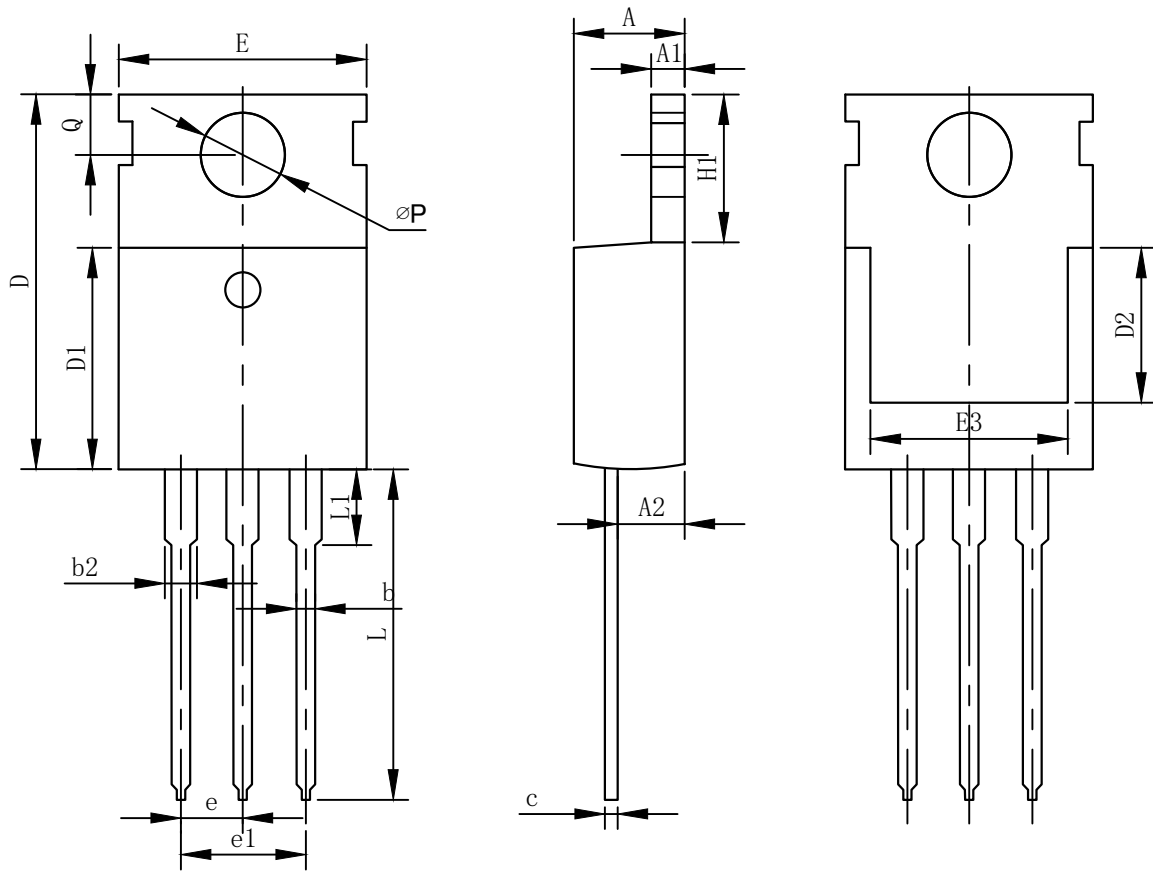

COMMON DIMENSIONS

| SYMBOL | mm | | |
|--------|---------|-------|-------|
| | MIN | NOM | MAX |
| A | 4.37 | 4.57 | 4.70 |
| A1 | 1.25 | 1.30 | 1.40 |
| A2 | 2.20 | 2.40 | 2.60 |
| b | 0.70 | 0.80 | 0.95 |
| b2 | 1.70 | 1.27 | 1.47 |
| c | 0.45 | 0.50 | 0.60 |
| D | 15.10 | 15.60 | 16.10 |
| D1 | 8.80 | 9.10 | 9.40 |
| D2 | 5.50 | - | - |
| E | 9.70 | 10.00 | 10.30 |
| E3 | 7.00 | - | - |
| e | 2.54BSC | | |
| e1 | 5.08BSC | | |
| H1 | 6.25 | 6.50 | 6.85 |
| L | 12.75 | 13.50 | 13.80 |
| L1 | - | 3.10 | 3.40 |
| øP | 3.40 | 3.60 | 3.80 |
| Q | 2.60 | 2.80 | 3.00 |

TO-220F Package information

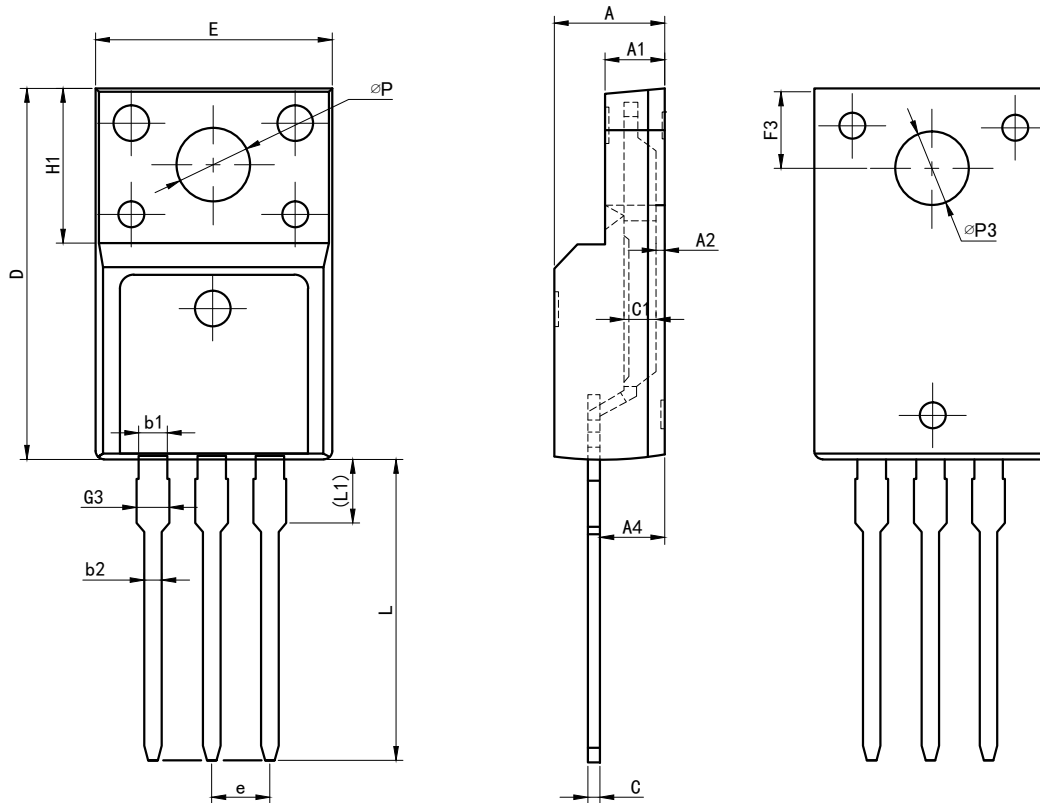

COMMON DIMENSIONS

| SYMBOL | mm | | |
|------------------|---------|-------|-------|
| | MIN | NOM | MAX |
| E | 9.96 | 10.16 | 10.36 |
| A | 4.50 | 4.70 | 4.90 |
| A1 | 2.34 | 2.54 | 2.74 |
| A2 | 0.30 | 0.45 | 0.60 |
| A4 | 2.56 | 2.76 | 2.96 |
| c | 0.40 | 0.50 | 0.65 |
| c1 | 1.20 | 1.30 | 1.35 |
| D | 15.57 | 15.87 | 16.17 |
| H1 | 6.70REF | | |
| e | 2.54BSC | | |
| L | 12.68 | 12.98 | 13.28 |
| L1 | 2.93 | 3.03 | 3.13 |
| $\varnothing P$ | 3.03 | 3.18 | 3.38 |
| $\varnothing P3$ | 3.15 | 3.45 | 3.65 |
| F3 | 3.15 | 3.30 | 3.45 |
| G3 | 1.25 | 1.35 | 1.55 |
| b1 | 1.18 | 1.28 | 1.43 |
| b2 | 0.70 | 0.80 | 0.95 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [GOFORD](#) manufacturer:

Other Similar products are found below :

[614233C](#) [648584F](#) [MCH3443-TL-E](#) [MCH6422-TL-E](#) [FDPF9N50NZ](#) [FW216A-TL-2W](#) [FW231A-TL-E](#) [APT5010JVR](#) [NTNS3A92PZT5G](#)
[IRF100S201](#) [JANTX2N5237](#) [2SK2464-TL-E](#) [2SK3818-DL-E](#) [FCA20N60_F109](#) [FDZ595PZ](#) [STD6600NT4G](#) [FSS804-TL-E](#) [2SJ277-DL-E](#)
[2SK1691-DL-E](#) [2SK2545\(Q,T\)](#) [D2294UK](#) [405094E](#) [423220D](#) [MCH6646-TL-E](#) [TPCC8103,L1Q\(CM](#) [367-8430-0972-503](#) [VN1206L](#)
[424134F](#) [026935X](#) [051075F](#) [SBVS138LT1G](#) [614234A](#) [715780A](#) [NTNS3166NZT5G](#) [751625C](#) [873612G](#) [IRF7380TRHR](#)
[IPS70R2K0CEAKMA1](#) [RJK60S3DPP-E0#T2](#) [RJK60S5DPK-M0#T0](#) [APT5010JVFR](#) [APT12031JFLL](#) [APT12040JVR](#) [DMN3404LQ-7](#)
[NTE6400](#) [JANTX2N6796U](#) [JANTX2N6784U](#) [JANTXV2N5416U4](#) [SQM110N05-06L-GE3](#) [SIHF35N60E-GE3](#)