



A  
B  
C  
D  
E  
F  
G  
H  
I  
J



Art.-Nr. / Item No.	Beschreibung / Description	Länge / Length (L)	AD / OD	Innenleiter Material / Material inner conductor
41081	HDMI 2.1 Kabel 0050 0,5m STD sw	500 ± 20 mm	6.0 ± 0.15 mm	(1/0.254 x 1P + D (1/0.254) + AM + M) x 5 PCS + 1/0.254 x 4C + AM + D (1/0.254) + B (64/0.12ALM)
41082	HDMI 2.1 Kabel 0100 1,0m STD sw	1000 ± 30 mm	6.0 ± 0.15 mm	(1/0.254 x 1P + D (1/0.254) + AM + M) x 5 PCS + 1/0.254 x 4C + AM + D (1/0.254) + B (64/0.12ALM)
41083	HDMI 2.1 Kabel 0150 1,5m STD sw	1500 ± 50 mm	6.0 ± 0.15 mm	(1/0.254 x 1P + D (1/0.254) + AM + M) x 5 PCS + 1/0.254 x 4C + AM + D (1/0.254) + B (64/0.12ALM)
41084	HDMI 2.1 Kabel 0200 2,0m STD sw	2000 ± 50 mm	6.0 ± 0.15 mm	(1/0.254 x 1P + D (1/0.254) + AM + M) x 5 PCS + 1/0.254 x 4C + AM + D (1/0.254) + B (64/0.12ALM)
47575	HDMI 2.1 Kabel 0300 3,0m STD sw	3000 ± 50 mm	7.3 ± 0.15 mm	(7/0.12BC x 1P + 1/0.25TC + AM + M) x 5 PCS + 7/0.12BC x 4C + AM 1/0.25TC + 128/0.12ALM
52766	HDMI 2.1 Kabel 0500 5,0m STD sw	5000 ± 70 mm	7.8 ± 0.2 mm	(1/0.40 x 1P + D (1/0.32) + AM +HM) x 5 PCS + 1/0.40 x 4C + AM + D (1/0.40) + B (128/0.12ALM)

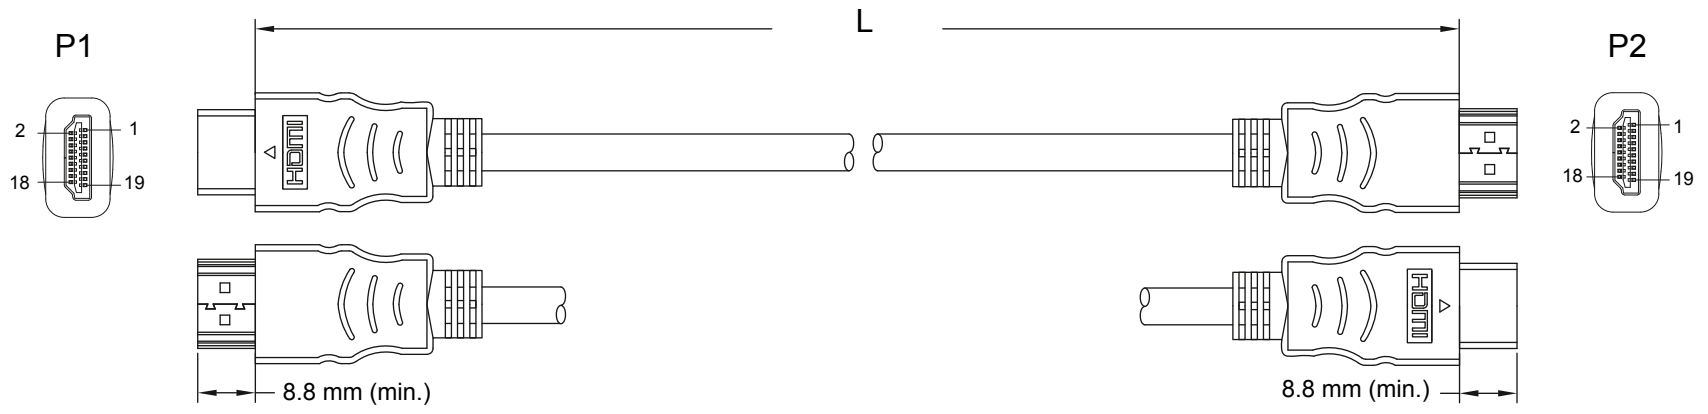

**Ultra High Speed HDMI™ Kabel**

- max. Datenrate 48 Gbit/s
- Hochgeschwindigkeitskabel für 8K @ 60 Hz
- Anschlüsse: 2x HDMI™-Stecker (Typ A)
- Kontakte: vergoldet
- Anzahl Schirmungen: 2 (Aluminiumgeflecht 144x)
- Material Gehäuse: PVC
- Material Kabelmantel: PVC
- Isolationswiderstand: 10 MΩ min.
- Kontaktwiderstand: 5 Ω max.
- Max. Auflösung: 4K Ultra HD 2160p (120 Hz), 8K Ultra HD 4320p (60 Hz)
- Unterstützte Standards: HDR (High Dynamic Range), HDCP 2.2, HDMI™ Ethernet Channel (HEC), 4K 3D, 21:9 Cinemascope, Consumer Electronics Control (CEC) Enhanced Audio Return Channel (eARC)
- Konformität: RoHS

**Ultra High Speed HDMI™ Cable**

- max. Data rate 48 Gbit/s
- High speed cable for 8K @ 60 Hz
- Connectors: 2x HDMI™ plug (Type A)
- Contacts: gold-plated
- Number of shieldings: 2 (aluminum braiding 144x)
- Material housing: PVC
- Material cable jacket: PVC
- Insulation resistance: 10 MΩ min.
- Contact resistance: 5 Ω max.
- Max. Resolution: 4K Ultra HD 2160p (120 Hz), 8K Ultra HD 4320p (60 Hz)
- Supported standards: HDR (High Dynamic Range), HDCP 2.2, HDMI™ Ethernet Channel (HEC), 4K 3D, 21:9 Cinemascope, Consumer Electronics Control (CEC) Enhanced Audio Return Channel (eARC)
- Conformity: RoHS



Änderungen		Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.: 01.02.2021	aw	HDMI 2.1 Kabel XXXX Xm STD sw	1/1
		gepr.: 01.02.2021	aw		
		Norm:			
Änderungen vorbehalten / Subject to change					

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [HDMI, Displayport & DVI Connectors](#) category:*

*Click to view products by [Goobay](#) manufacturer:*

Other Similar products are found below :

[1775247-3](#) [2-1932649-5](#) [30-1231](#) [30-528](#) [2069485-1](#) [30-504](#) [30-519](#) [30-542](#) [47648-2000](#) [2002-400](#) [769-103/021-000](#) [1932649-1](#) [233-368NFG6-17NH](#) [RPI-16338](#) [CCB-HDMIL-1.5M](#) [CCB-HDMIL-1M](#) [CCB-HDMIL-7.5M](#) [CCBP-HDMI-10M](#) [CCBP-HDMI8K-2M](#) [AK-AV-02](#) [AK-AV-11](#) [AK-AV-13](#) [AK-AV-15](#) [AK-HD-100A](#) [AK-HD-100P](#) [AK-HD-15P](#) [AK-HD-30P](#) [DSP-2PH4-04](#) [DSP-4PH4-02](#) [DSP-8PH4-03](#) [AK-AD-38](#) [AK-AD-39](#) [RPI-14662](#) [RPI-16335](#) [A-DPM-DVIF-002-W](#) [A-DPM-DVIF-03-W](#) [A-DPM-HDMIF-002](#) [A-DVI-VGA](#) [A-HDMI90-FML](#) [A-MDPM-DPF-001-W](#) [A-MDPM-HDMIF-02-W](#) [A-MDPM-HDMIF4K-01](#) [75053](#) [75603](#) [75777](#) [75844](#) [75919](#) [A-DPM-HDMIF-002-W](#) [AK-330126-100-S](#) [KAB-07040](#)