



Pin-Belegung / Pin Assignment

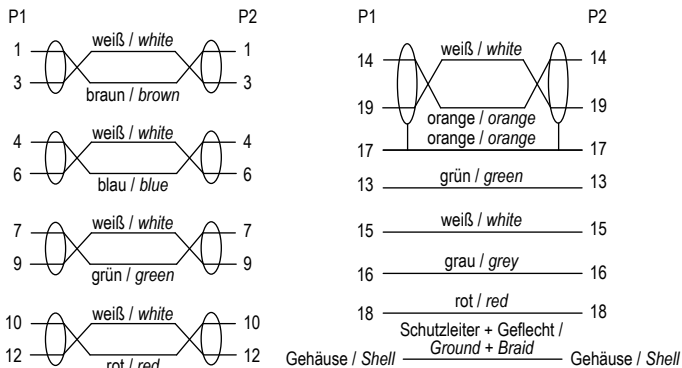

Aderquerschnitt / Wire cross section

5 Signalleitungen / 5 Signal lines



- Leiter der Signalleitung / Signal line conductor: 30 AWG (1/0.254CCS)
- Isolierung der Signalleitung / Signal line insulation: FO-PE
- Erdung / Ground wire: 30 AWG (1/0.254CCS)
- Al. Mylar / Al. Mylar: *5P
- Elektronen-Leiter / Electron conductor: 30 AWG (1/0.254CCS)
- Elektronen-Isolierung / Electron insulation: HD-PE*4C
- Al. Mylar (einseitige Aluminium folie + transparentes Mylar) / Al. Mylar (single-sided aluminium foil + transparent Mylar)
- Erdung / Drain wire: 30 AWG (1/0.254CCS)
- Mantel AD / Jacket OD: 5.5 ± 0.2 mm PVC

Art.-Nr. / Item No.	Beschreibung / Description	Länge / Length (L)	Übertragungsrate / Transmission rate	Kontaktwiderstand / Contact resistance
60619	HDMI 2.0 Kabel 0050 0,5m (15+1) STD sw LC	500 ± 15 mm	max. 18 Gbit/s	5 Ω max.
60620	HDMI 2.0 Kabel 0100 1,0m (15+1) STD sw LC	1000 ± 20 mm	max. 18 Gbit/s	5 Ω max.
60621	HDMI 2.0 Kabel 0150 1,5m (15+1) STD sw LC	1500 ± 30 mm	max. 18 Gbit/s	5 Ω max.
60622	HDMI 2.0 Kabel 0200 2,0m (15+1) STD sw LC	2000 ± 30 mm	max. 18 Gbit/s	5 Ω max.
60623	HDMI 2.0 Kabel 0300 3,0m (15+1) STD sw LC	3000 ± 50 mm	max. 18 Gbit/s	10 Ω max.
60624	HDMI 2.0 Kabel 0500 5,0m (15+1) STD sw LC	5000 ± 100 mm	max. 18 Gbit/s	10 Ω max.
60625	HDMI 2.0 Kabel 0750 7,5m (15+1) STD sw LC	7500 ± 200 mm	max. 10.2 Gbit/s	10 Ω max.
60626	HDMI 2.0 Kabel 1000 10,0m (15+1) STD sw LC	10000 ± 200 mm	max. 10.2 Gbit/s	20 Ω max.

High Speed HDMI™-Kabel mit Ethernet

- hochauflösende Signalübertragung mit bis zu 4K @ 60 Hz (abwärtskompatibel)
- vergoldete HDMI™-Steckverbinder
- integrierter Ethernet-Kanal spart zusätzliche Netzwerk- oder Audiokabel

Anschlüsse: 2x HDMI™-Stecker (Typ A)
 Kabeltyp: Rundkabel
 AWG: 30
 Max. Auflösung: 4K Ultra HD 2160p (60 Hz)
 Isolationswiderstand: 300 V ===, 10 MΩ min.
 Unterstützte Standards: HDR (High Dynamic Range), HDMI™ Ethernet Channel (HEC), 4K 3D, HDCP 2.2, 21:9 Cinemascope, Consumer Electronics Control (CEC), Audio Return Channel (ARC), Audio (1536 kHz), Deep Color (36 Bit), x.v.Colour (xvYCC)

High Speed HDMI™ cable with Ethernet

- high-resolution signal transmission with up to 4K @ 60 Hz (downward compatible)
- gold-plated HDMI™ connectors
- integrated Ethernet channel saves additional network or audio cables

Connections: 2x HDMI™ plug (Type A)
 Cable type: round cable
 AWG: 30
 Max. resolution: 4K Ultra HD 2160p (60 Hz)
 Insulation resistance: 300 V ===, 10 MΩ min.
 Supported standards: HDR (High Dynamic Range), HDMI™ Ethernet Channel (HEC), 4K 3D, HDCP 2.2, 21:9 Cinemascope, Consumer Electronics Control (CEC), Audio Return Channel (ARC), Audio (1536 kHz), Deep Color (36 Bit), x.v.Colour (xvYCC)



Änderungen		Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.: 13.05.2022	ir	HDMI 2.0 Kabel XXXX Xm (15+1) STD sw LC	1/1
		gepr.: 13.05.2022	aw		
		Norm:			
Änderungen vorbehalten / Subject to change				Zeichnungs-Nr.:	von



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [HDMI, Displayport & DVI Connectors](#) category:

Click to view products by [Goobay](#) manufacturer:

Other Similar products are found below :

[30-528](#) [30-504](#) [33DVIR-24S1B](#) [47648-2000](#) [TC142X](#) [HAGBH](#) [AABII](#) [AAIBG](#) [AAIBH](#) [AANBG](#) [52355](#) [XHLJQ-00026](#) [HDMI-019R](#)
[G46M2013201AWEU](#) [ST-0277D00-052-142](#) [PJ-399M](#) [PJ-615-5A](#) [HDMI-S-125-D](#) [PJ-359](#) [PJ-3850-5A](#) [PJ-3250D-5A](#) [KH-PJ-359](#) [HDMI-](#)
[005-ARSW-L116](#) [58490](#) [DS-45404](#) [HD0039](#) [60616](#) [AAMBJ](#) [61275](#) [61297](#) [KABHD](#) [OEM-40](#) [61293](#) [DS-45316](#) [50355](#) [AK-330115-010-S](#)
[AK-330101-002-S](#) [AHCBI](#) [AK-330127-300-S](#) [CG526-B-3.0](#) [64866](#) [CG525-R-1.8](#) [61296](#) [CG865-3](#) [CG517-3.0](#) [EAEBD](#) [65262](#) [DB-340305-](#)
[018-S](#) [DS-55521](#) [ALGLI](#) [KABHD](#) [OEM-35](#)