
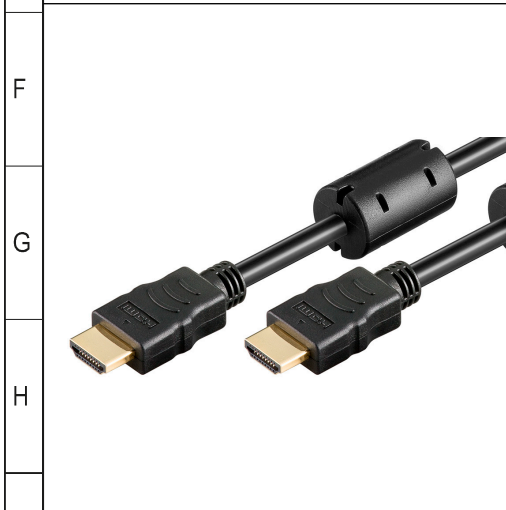
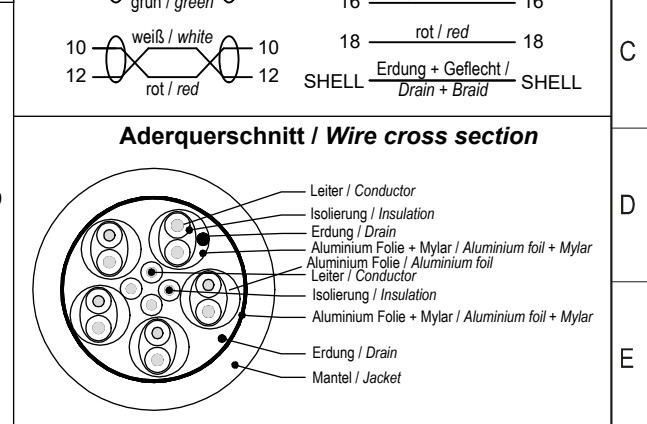


1	2	3	4	5	6	7	8	9	10	11	12	13	14
A	Art.-Nr. / Item No.	Beschreibung / Description	Länge / Length (L)	Kontaktwiderstand / Contact resistance	Max. Übertragungsrate / Max. data transmission rate	AD Kabelmantel / OD cable jacket	Kabeldurchmesser / Cable diameter			Pin-Belegung / Pin Assignment			
B	61299	HDMI 2.0 Kabel Ferrite 0100 1,0m (15+1) sw	1000 ± 20 mm	5 Ω max.	18 Gbit/s	5.5 ± 0.2 mm	30AWG (1/0.254CCS) * 1P + AL) * 4P + (1/0.254CCS) * 1P + E + AM) * 1P + 30# (1/0.254CCS) * 4C + D (1/0.254CCS) + AL						
B	61300	HDMI 2.0 Kabel Ferrite 0150 1,5m (15+1) sw	1500 ± 30 mm	5 Ω max.	18 Gbit/s	5.5 ± 0.2 mm							
B	61301	HDMI 2.0 Kabel Ferrite 0200 2,0m (15+1) sw	2000 ± 30 mm	5 Ω max.	18 Gbit/s	5.5 ± 0.2 mm							
B	61302	HDMI 2.0 Kabel Ferrite 0300 3,0m (15+1) sw	3000 ± 50 mm	10 Ω max.	18 Gbit/s	5.5 ± 0.2 mm							
B	61303	HDMI 2.0 Kabel Ferrite 0500 5,0m (15+1) sw	5000 ± 100 mm	10 Ω max.	10.2 Gbit/s	5.5 ± 0.2 mm	26AWG (1/0.40CCS) * 1P+AM) * 4P + (1/0.40CCS) * 1P + E + AM) * 1P + 30# (1/0.254CCS) + 4C + D (1/0.254CCS) + AL						
B	61304	HDMI 2.0 Kabel Ferrite 1000 10,0m (15+1) sw	10000 ± 200 mm	20 Ω max.	10.2 Gbit/s	5.5 ± 0.2 mm							
C	61305	HDMI 2.0 Kabel Ferrite 1500 15,0m (15+1) sw	15000 ± 300 mm	30 Ω max.	10.2 Gbit/s	7 ± 0.2 mm							

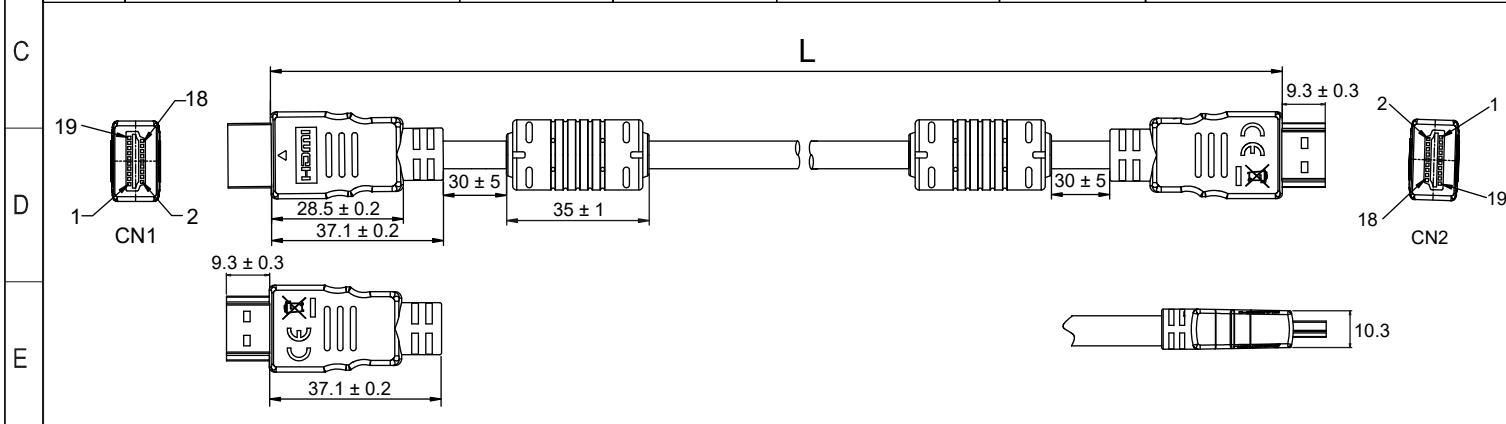

High-Speed-HDMI™-Kabel mit Ethernet (Ferrite)

- hochauflösende Signalübertragung mit bis zu 4K @ 60 Hz (Ultra HD 2160p)
- vergoldete HDMI™-Steckverbinder
- integrierter Ethernet-Kanal

Anschlüsse: 2x HDMI™-Stecker (Typ A)

Material Kabelmantel: PVC

Isolationswiderstand: 300 V ===, 10 MΩ min.

Ferritkern: 2x

Unterstützte Audiostandards: Enhanced Audio Return Channel (eARC), Audio Return Channel (ARC)

Weitere unterstützte Standards: HDR (High Dynamic Range), HDCP 2.2, HDMI™ Ethernet Channel (HEC), 3D, Consumer Electronics Control (CEC)

High Speed HDMI™ Cable with Ethernet (Ferrite)

- high-definition signal transmission with up to 4K @ 60 Hz (Ultra HD 2160p)
- gold-plated HDMI™ connectors
- integrated Ethernet channel

Connections: 2x HDMI™ plug (Type A)

Material cable jacket: PVC

Insulation resistance: 300 V ===, 10 MΩ min.

Ferrite core: 2x

Supported audio standards: Enhanced Audio Return Channel (eARC), Audio Return Channel (ARC)

Other supported standards: HDR (High Dynamic Range), HDCP 2.2, HDMI™ Ethernet Channel (HEC), 3D, Consumer Electronics Control (CEC)

Änderungen		Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.:	09.02.2023	HDMI 2.0 Kabel Ferrite XXXX Xm (15+1) sw	1/1
		gepr.:	09.02.2023		
		Norm:		Zeichnungs-Nr.:	von
Änderungen vorbehalten / Subject to change					

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [HDMI, Displayport & DVI Connectors](#) category:

Click to view products by [Goobay](#) manufacturer:

Other Similar products are found below :

[30-528](#) [30-504](#) [33DVIR-24S1B](#) [47648-2000](#) [TC142X](#) [HAGBH](#) [AABII](#) [AAIBG](#) [AAIBH](#) [AANBG](#) [52355](#) [XHLJQ-00026](#) [HDMI-019R](#)
[G46M2013201AWEU](#) [ST-0277D00-052-142](#) [PJ-399M](#) [PJ-615-5A](#) [HDMI-S-125-D](#) [PJ-359](#) [PJ-3850-5A](#) [PJ-3250D-5A](#) [KH-PJ-359](#) [HDMI-](#)
[005-ARSW-L116](#) [58490](#) [DS-45404](#) [HD0039](#) [60616](#) [AAMBJ](#) [61275](#) [61297](#) [KABHD](#) [OEM-40](#) [61293](#) [DS-45316](#) [50355](#) [AK-330115-010-S](#)
[AK-330101-002-S](#) [AHCBI](#) [AK-330127-300-S](#) [CG526-B-3.0](#) [64866](#) [CG525-R-1.8](#) [61296](#) [CG865-3](#) [CG517-3.0](#) [EAEBD](#) [65262](#) [DB-340305-](#)
[018-S](#) [DS-55521](#) [ALGLI](#) [KABHD](#) [OEM-35](#)