
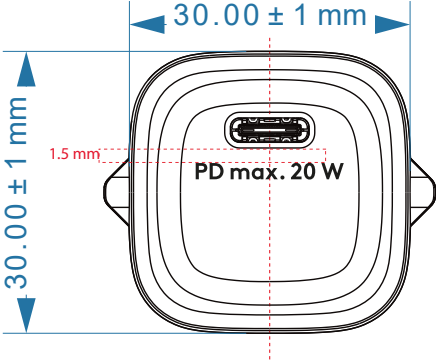
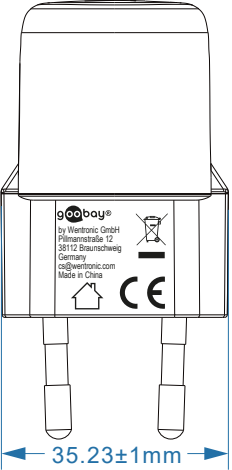
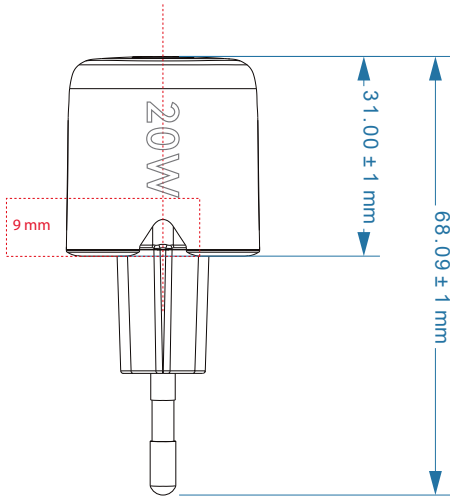



	1	2	3	4	5	6	7	8	9	10	11	12	13	14		
A	<b>Art.-Nr. / Item No.</b>		<b>Farbe / Colour</b>												A	
	65403		schwarz / black													
	65404		weiß / white													
B																B
C																C
D																D
E				<b>USB-C™ PD Schnellladegerät Nano (20 W)</b> <ul style="list-style-type: none"> <li>- Mit 20 W Leistung ist der Ladeadapter speziell auf kleine Geräte wie Smartphones, Bluetooth-Kopfhörer, Tablets oder Powerbanks zugeschnitten</li> <li>- Die integrierte Schutzelektronik des USB-C™-Ladegeräts sichert angeschlossene Geräte gegen Überstrom, Überladung und Überhitzung</li> </ul>			<b>USB-C™ PD Fast Charger Nano (20 W)</b> <ul style="list-style-type: none"> <li>- With 20 W power, the charging adapter is specially tailored to small devices such as smartphones, Bluetooth headphones, tablets or power bank</li> <li>- The integrated protection electronics of the USB-C™ charger protects connected devices against overcurrent, overcharging and overheating</li> </ul>									E
F							<b>Anschlüsse:</b> Eurostecker (Typ C, CEE 7/16) x in, USB-C™ PD (Power Delivery) Buchse			<b>Connectors:</b> Euro plug (Typ C, CEE 7/16), USB-A socket,						F
G				<b>Eingang:</b> 100-240 V ~, 50/60 Hz, 0,5 A <b>Ausgang USB-C™ PD:</b> 5,0 V =, 3,0 A, 15,0 W max. oder 9,0 V =, 2,2 A, 20,0 W max. oder 12,0 V =, 1,7 A, 20,0 W max. oder PPS1: 3,3 - 5,9 V =, 3,0 A, 17,7 W max. oder PPS2: 3,3 - 11,0 V =, 1,8 A, 19,8 W max.			<b>Input:</b> 110-240 V ~, 50/60 Hz, 0.5 A <b>Output USB-C™ PD:</b> 5.0 V =, 3.0 A, 15.0 W max. or 9.0 V =, 2.2 A, 20.0 W max. or 12.0 V =, 1.67 A, 20.0 W max. or PPS1: 3.3 - 5.9 V =, 3.0 A, 17.7 W max. or PPS2: 3.3 - 11.0 V =, 1.8 A, 19.8 W max.						G			
H				<b>Durchschnittliche Effizienz im Betrieb:</b> 88,6 % <b>Effizienz bei geringer Last (10%):</b> 81,3 % <b>Leistungsaufnahme bei Nulllast:</b> 0,04 W <b>Schutzklasse:</b> II <b>Gewicht:</b> 36 g			<b>Average active efficiency:</b> 88.6 % <b>Efficiency at low load (10 %):</b> 81.3 % <b>Power consumption at no load:</b> 0.04 W <b>Protection class:</b> II <b>Weight:</b> 36 g						H			
I	<b>Änderungen</b>			<b>Datum</b>	<b>Name</b>		<b>Bezeichnung</b>					<b>Blatt</b>		I		
	Datum		Name	gez.:	08.12.2023	ir	TRA USB 20W 1 Port 1xC PD nano GaN sw ws PL					1/1				
				gepr.:	08.12.2023		Zeichnungs-Nr.:					von				
J				Norm:			65403, 65404							J		
				Änderungen vorbehalten / Subject to change												
	1	2	3	4	5	6	7	8	9	10	11	12	13	14		



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Wall Mount AC Adapters](#) category:*

*Click to view products by [Goobay](#) manufacturer:*

Other Similar products are found below :

[ADP-163 E](#) [ADP-167 J](#) [ADP-159 A](#) [PSAC05A-050L6](#) [DA10-050US](#) [WSU075-1000-R13](#) [WSU120-2000-R13](#) [WSU180-1330-13](#) [WSU120-2000-13](#) [WSU150-0800-13](#) [WSU075-3200-13](#) [WSU090-2500-13](#) [WSU050-2000-R13](#) [WSU240-1000-13](#) [WSU150-0560-13](#) [WSU240-0500-R13](#) [WSU075-1500-13](#) [WSU050-3000-13](#) [WSU120-1500-13](#) [WSU120-1500-R13](#) [WSU240-0750-13](#) [WSU090-2500-R13](#) [WSU240-1500-13](#) [WSU180-0660-13](#) [WSU090-1300-13](#) [WSU050-1500-13](#) [WSU090-0800-13](#) [WSU120-0700-13](#) [WSU045-3000-13](#) [WSU120-3000-13](#) [WSU090-1300-R13](#) [WSU075-1000-13](#) [WSU060-1250-R13](#) [WSU060-1250-13](#) [WSU050-4000-13](#) [WSU045-1500-R13](#) [PSAC05A-050L6M](#) [AC PLUG-AU3](#) [AC PLUG-MIX3](#) [TRE-A](#) [223-00011](#) [223-00012](#) [AA20R-480A-R](#) [223-00010](#) [KT1001US](#) [BB-SMI6B12V-P230C1](#) [FPBAG1-H](#) [KT1001EU](#) [POSC05200A-0723-WH](#) [POSC05200A-1335-WH](#)