


	1	2	3	4	5	6	7	8	9	10	11	12	13	14
A	Art.-Nr. / Item No.		Länge / Length (L)											
	71472		5 m											
	71475		10 m											
	44841		25 m											
B														
C														
D														
E														
F			Netzkabel - Stromverlängerungskabel aus einer schweren Gummischlauchleitung mit Schutzkappe, Schutzkontaktstecker und -kupplung - für die Anwendung im Freien - ölbeständig					Power cable - power extension cable consisting of a heavy rubber-sheathed cable with a protective cover, safety plug and safety connector - for outdoor use - oil-resistant						
G			Anschlüsse:		Schutzkontaktbuchse (Typ F, CEE 7/3) mit Abdeckung, Schutzkontaktstecker (Typ F, CEE 7/7)			Connectors:		Safety socket (Type F, CEE 7/3) with cover, Safety plug (type F, CEE 7/7)				
			Schutzart:		IP44			Protection level:		IP44				
H			Schutzklasse:		1			Protection class:		1				
	Nennspannung:		250 V ~			Nominal voltage:		250 V ~						
	Nennstromstärke:		16 A			Nominal current:		16 A						
	Last:		max. 3680 W			Load:		max. 3680 W						
	Kabeltyp:		H07RN-F 3G 1.5 mm ²			Cable type:		H07RN-F 3G 1.5 mm ²						
	Material Innenleiter:		Cu (Kupfer)			Material inner conductor:		Cu (copper)						
	Anzahl Innenleiter:		3			Number of inner conductors:		3						
	Material Kabelmantel:		PVC			Material cable jacket:		PVC						
	Material Gehäuse:		PC, PTB, TPE			Material housing:		PC, PTB, TPE						
I	Änderungen				Datum		Name		Bezeichnung				Blatt	
	Datum		Name		gez.:		tf		NK 138 S-XX Xm				1/1	
	22.04.2021		aw		gepr.:		tf		SCHWARZ OUTDOOR IP44					
J					Norm:				Zeichnungs-Nr.:				von	
									71475, 71472, 44841					
	Änderungen vorbehalten / Subject to change													
	1	2	3	4	5	6	7	8	9	10	11	12	13	14

Innenleiter / Inner conductor



$L \pm 2\%$

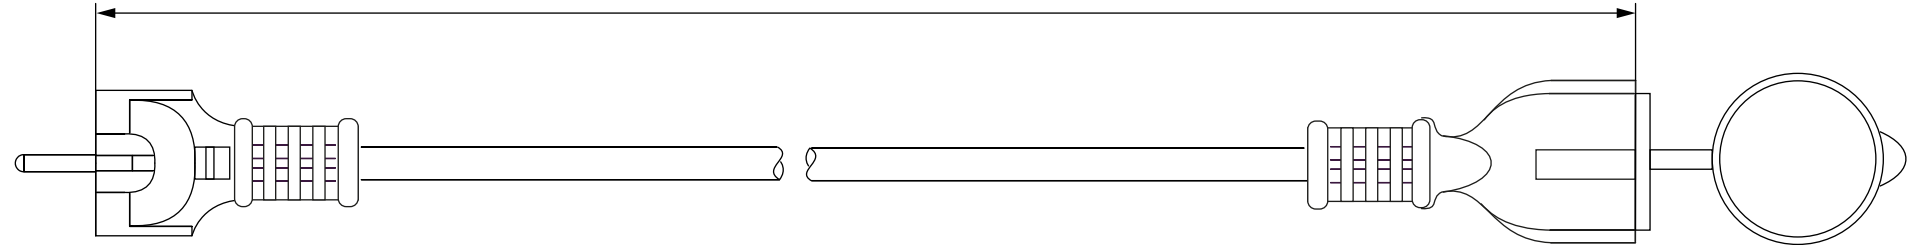

Netzkabel

- Stromverlängerungskabel aus einer schweren Gummischlauchleitung mit Schutzkappe, Schutzkontaktstecker und -kupplung
- für die Anwendung im Freien
- ölbeständig

Anschlüsse: Schutzkontaktbuchse (Typ F, CEE 7/3) mit Abdeckung, Schutzkontaktstecker (Typ F, CEE 7/7)

Schutzart: IP44

Schutzklasse: 1

Nennspannung: 250 V ~

Nennstromstärke: 16 A

Last: max. 3680 W

Kabeltyp: H07RN-F 3G 1.5 mm²

Material Innenleiter: Cu (Kupfer)

Anzahl Innenleiter: 3

Material Kabelmantel: PVC

Material Gehäuse: PC, PTB, TPE

Power cable

- power extension cable consisting of a heavy rubber-sheathed cable with a protective cover, safety plug and safety connector
- for outdoor use
- oil-resistant

Connectors: Safety socket (Type F, CEE 7/3) with cover, Safety plug (type F, CEE 7/7)

Protection level: IP44

Protection class: 1

Nominal voltage: 250 V ~

Nominal current: 16 A

Load: max. 3680 W

Cable type: H07RN-F 3G 1.5 mm²

Material inner conductor: Cu (copper)

Number of inner conductors: 3

Material cable jacket: PVC

Material housing: PC, PTB, TPE



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [AC Power Leads](#) category:

Click to view products by [Goobay](#) manufacturer:

Other Similar products are found below :

[YP-61+YC12](#) [YP21A+YC13](#) [6601](#) [FTP-629Y603](#) [1700001947](#) [IL13-EU1-H05-3100-300-S](#) [2217913-1](#) [P28976-M45](#) [BB-3271V86](#) [P29844-M5](#) [P29844-M10](#) [P28818-M6](#) [387005324](#) [387005325](#) [59903000000](#) [387007040](#) [IL13P-EU1-H05-3100-300](#) [PCAK2](#) [EM9169](#) [32004](#) [32002](#) [W-98979](#) [W-98980](#) [W-98983](#) [W-98987](#) [W-99183](#) [AM TO TYPE-C-0.3M](#) [HC-3C1.5MM-Z-P](#) [HC-CE1.2MM-W-K](#) [AK-RD-07A](#) [LPS275](#) [18049236](#) [LA0055](#) [HC-3C1.5MM-W-P](#) [NUFPWC-03PMMS-LC500](#) [NUF-MSAP-08BMMM-RJ](#) [BEST 053](#) [W-99469](#) [W2243](#) [W-99945](#) [W-99764](#) [W-98642](#) [W-98643](#) [W-99440](#) [W-97783](#) [W-99175](#) [W-97760](#) [W-99243](#) [M02411](#) [W-98692](#)