



1N4001 thru 1N4007

General Purpose Plastic Rectifiers

Reverse Voltage 50 to 1000 Volts Forward Current 1.0 Ampere



Features

- ◆ Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- ◆ Construction utilizes void-free molded plastic technique
- ◆ Low reverse leakage
- ◆ High forward surge capability
- ◆ High temperature soldering guaranteed:
250°C/10 seconds, 0.375" (9.5mm) lead length,
5 lbs. (2.3kg) tension
- ◆ T_J is 150°C (Max.) and T_{STG} is 175°C (Max.) with PI glue



DO-204AL (DO-41)

A-405



Dimensions in inches and (millimeters) Dimensions in inches and (millimeters)

Note: Lead diameter is 0.025(0.64)/0.021(0.53) for suffix "S" part numbers

Mechanical Data

- ◆ Case: JEDEC DO-204AL (DO-41)/A-405, molded plastic body
- ◆ Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026
- ◆ Polarity: Color band denotes cathode end
- ◆ Mounting Position: Any
- ◆ Weight: DO-41 - 0.012 ounce, 0.33 gram
A-405 - 0.008 ounce, 0.23 gram

Maximum Ratings and Electrical Characteristics







Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbols	1N4001	1N4002	1N4003	1N4004	1N4005	1N4006	1N4007	Units
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A=50^\circ\text{C}$	$I_{F(AV)}$					1.0			Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) $T_A=50^\circ\text{C}$	I_{FSM}					30.0			Amps
Maximum full load reverse current, full cycle average 0.375" (9.5mm) lead length at $T_A=75^\circ\text{C}$	$I_{R(AV)}$				30				uA
Maximum instantaneous forward voltage at 1.0A	V_F				1.1				Volts
Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=100^\circ\text{C}$	I_R				5.0	50			uA
Typical reverse recovery time at $I_F=20\text{mA}$, $I_{RM}=1\text{mA}$ (Note 2)	t_{rr}				1.0				uS
Typical junction capacitance at 4.0V, 1MHz	C_J				15				pF
Typical thermal resistance (Note 1)	$R_{\theta JA}$ $R_{\theta JL}$				50.0	25.0			°C/W
Operating junction temperature range	T_J				-55 to +125				°C
Storage temperature range	T_{STG}				-55 to +150				°C

Notes: 1. Thermal resistance from junction to ambient, and from junction to lead at 0.375" (9.5mm) lead length, P.C.B. mounted
2. Measured on Tektronix type "S" recovery plug-in. Tektronix 545 scope or equivalent

RATINGS AND CHARACTERISTIC CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

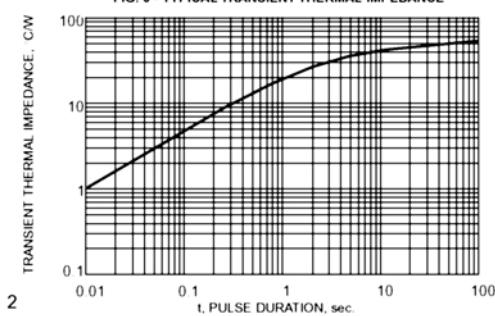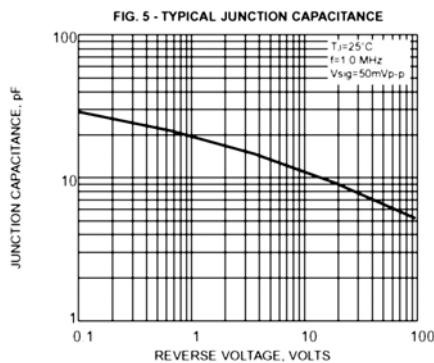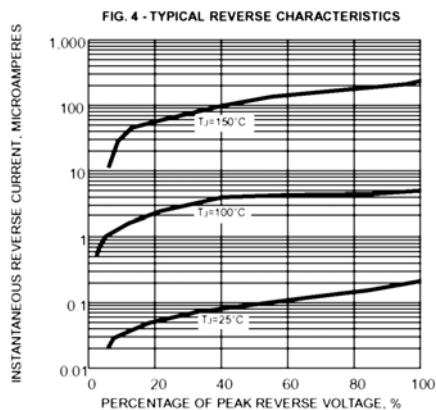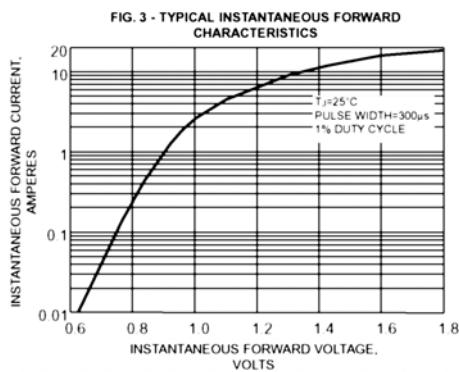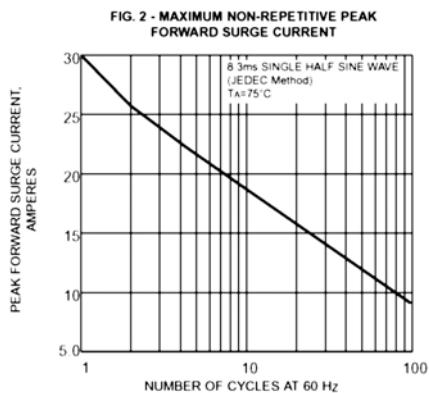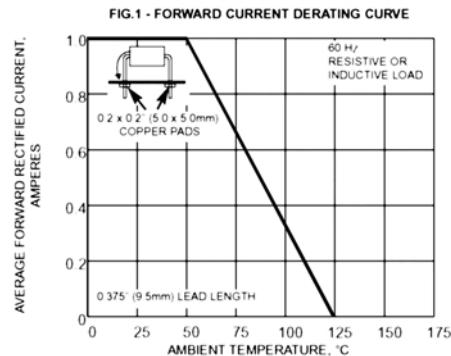

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Diodes - General Purpose, Power, Switching category:

Click to view products by Good-Ark manufacturer:

Other Similar products are found below :

[MMBD3004S-13-F](#) [RD0306T-H](#) [BAV17-TR](#) [BAV19-TR](#) [HSC285TRF-E](#) [1N3611](#) [NTE156A](#) [NTE574](#) [NTE6244](#) [1SS181-TP](#) [1SS193,LF](#)
[1SS400CST2RA](#) [SDAA13](#) [SHN2D02FUTW1T1G](#) [LS4151GS08](#) [1N4449](#) [1N456A](#) [1N4934-E3/73](#) [1N914B](#) [1N914BTR](#) [1SS226-TP](#)
[RFUH20TB3S](#) [D291S45T](#) [BAV300-TR](#) [BAW56DWQ-7-F](#) [BAW75-TAP](#) [MM230L-CAA](#) [IDW40E65D1](#) [JAN1N3600](#) [LL4151-GS18](#)
[053684A](#) [SMMSD4148T3G](#) [707803H](#) [NSVDAN222T1G](#) [CDSZC01100-HF](#) [LL4150-M-08](#) [1N4454-TR](#) [BAV199E6433HTMA1](#) [BAS28-7](#)
[BAW56HDW-13](#) [BAS28 TR](#) [VS-HFA04SD60STR-M3](#) [NSVM1MA152WKT1G](#) [RGP30D-E3/73](#) [BAV99TQ-13-F](#) [BAS21DWA-7](#) [NTE6250](#)
[NTE582-4](#) [NTE582-6](#) [MMDB30-E28X](#)