



GOOD-ARK

# SB320 thru SB360


Schottky Barrier Rectifiers

Reverse Voltage 20 to 60 Volts


Forward Current 3.0 Amperes

## Features

- ◆ Metal-Semiconductor junction with guard ring
- ◆ Epitaxial construction
- ◆ Low forward voltage drop
- ◆ High current capability
- ◆ The plastic material carries UL recognition 94V-0
- ◆ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications



DO-201AD

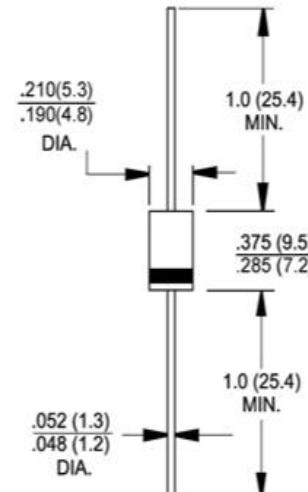

Dimensions in inches and (millimeters)

## Mechanical Data

- ◆ Case : JEDEC DO-201AD molded plastic
- ◆ Polarity : Color band denotes cathode
- ◆ Weight : 0.041 ounce, 1.15 grams
- ◆ Mounting position : Any

## Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

PARAMETER	SYMBOL	SB320	SB330	SB340	SB350	SB360	UNIT
Maximum repetitive peak reverse voltage	VRRM	20	30	40	50	60	V
Maximum RMS voltage	VRMS	14	21	28	35	42	V
Maximum DC blocking voltage	VDC	20	30	40	50	60	V
Maximum average forward rectified current at TL(see Fig.1)	IF(AV)			3			A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	IFSM			100			A
Maximum forward voltage at 3.0A DC	VF		0.50		0.70		V
Maximum DC reverse current at rated DC blocking voltage	T <sub>j</sub> =25°C T <sub>j</sub> =125°C	IR		0.15			mA
				15			
Typical thermal resistance junction to ambient(Note1)	R <sub>θJA</sub>			40			°C/W
Typical thermal resistance junction to lead(Note1)	R <sub>θJL</sub>			18			°C/W
Typical thermal resistance junction to case(Note1)	R <sub>θJC</sub>			23			°C/W
Typical junction capacitance Measured at 1.0MHz and applied reverse voltage of 4.0V DC	C <sub>j</sub>			250			pF
Operating junction temperature range	T <sub>J</sub>		- 55 to + 125		- 55 to + 150		°C
Storage temperature range	T <sub>STG</sub>			- 55 to + 150			°C

Note: 1. Thermal Resistance at .375"(9.5mm)Lead Length, PC Board Mounted.

## RATINGS AND CHARACTERISTIC CURVES

( $T_A = 25^\circ\text{C}$  unless otherwise noted)

FIG.1 - FORWARD CURRENT DERATING CURVE

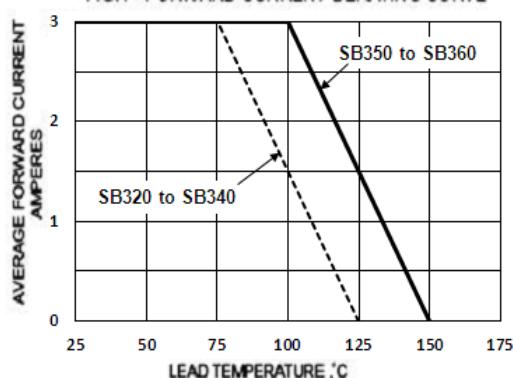


FIG.2 - MAXIMUM NON-REPETITIVE SURGE CURRENT

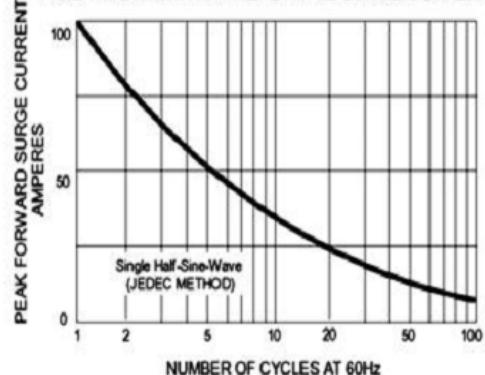


FIG.3 - TYPICAL JUNCTION CAPACITANCE

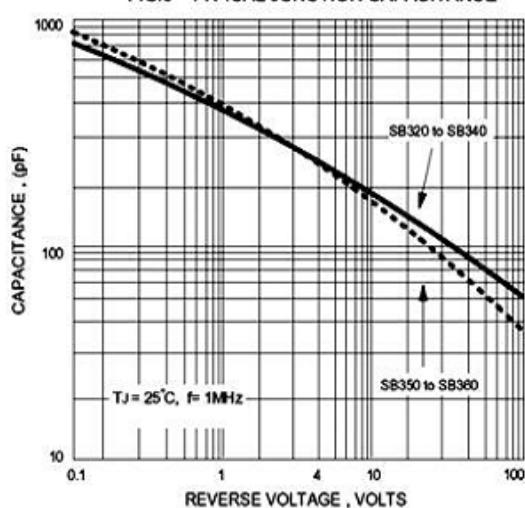


FIG.4 - TYPICAL FORWARD CHARACTERISTICS


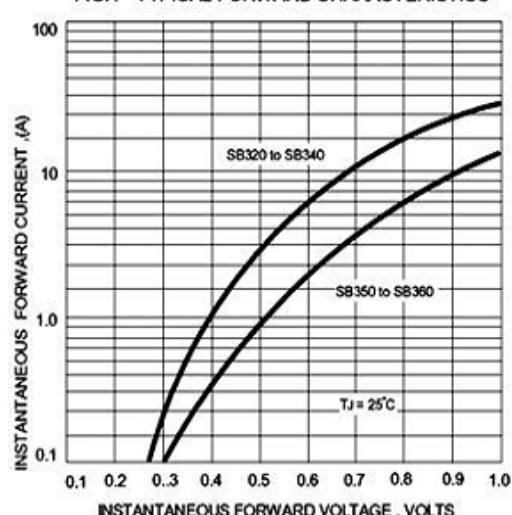


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

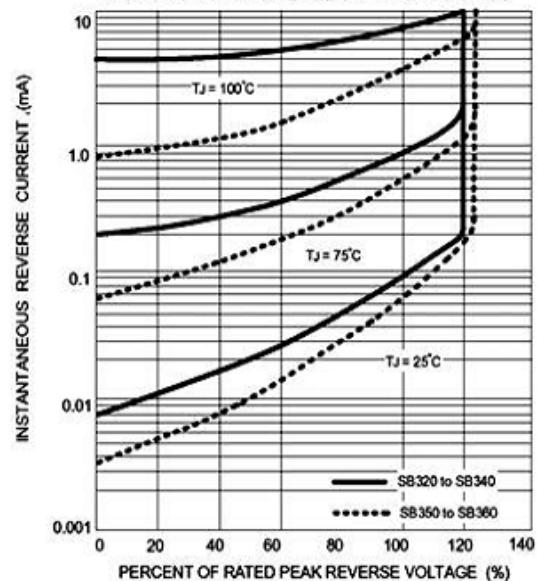

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Schottky Diodes & Rectifiers category:***

***Click to view products by Good-Ark manufacturer:***

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [GS1JE-TP](#) [RB160M-50TR](#) [BAS 3010S-02LRH E6327](#)  
[BAT 54-02LRH E6327](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#)  
[SBAT54CWT1G](#) [SBM30-03-TR-E](#) [SK310-T](#) [SK33A-TP](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM\)](#)  
[MA4E2501L-1290](#) [MBRB30H30CT-1G](#) [BAS 70-02L E6327](#) [DMJ3940-000](#) [SB007-03C-TB-E](#) [SB10015M-TL-E](#) [SB1003M3-TL-E](#) [SK32A-](#)  
[TP](#) [SK33B-TP](#) [SK35A-TP](#) [SK38B-LTP](#) [SK38B-TP](#) [NTE505](#) [NTSB30U100CT-1G](#) [VS-6CWQ10FNHM3](#) [CRG04\(T5L,TEMQ\)](#)  
[ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA140-HF](#) [ACDBA2100-HF](#) [ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [BAT54-](#)  
[13-F](#) [ACDBA340-HF](#) [ACDBA260LR-HF](#)