



SB320 thru SB360

Schottky Barrier Rectifiers
Reverse Voltage 20 to 60 Volts Forward Current 3.0 Amperes

Features


- ◆ Metal-Semiconductor junction with guard ring
- ◆ Epitaxial construction
- ◆ Low forward voltage drop
- ◆ High current capability
- ◆ The plastic material carries UL recognition 94V-0
- ◆ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications



DO-201AD

Mechanical Data

- ◆ Case : JEDEC DO-201AD molded plastic
- ◆ Polarity : Color band denotes cathode
- ◆ Weight : 0.041 ounce, 1.15 grams
- ◆ Mounting position : Any

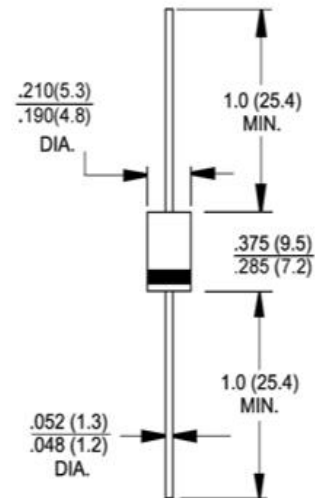

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics






Ratings at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.

PARAMETER	SYMBOL	SB320	SB330	SB340	SB350	SB360	UNIT
Maximum repetitive peak reverse voltage	VRRM	20	30	40	50	60	V
Maximum RMS voltage	VRMS	14	21	28	35	42	V
Maximum DC blocking voltage	VDC	20	30	40	50	60	V
Maximum average forward rectified current at TL(see Fig.1)	IF(AV)	3					A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	IFSM	100					A
Maximum forward voltage at 3.0A DC	VF	0.50			0.70		V
Maximum DC reverse current at rated DC blocking voltage	T _J =25°C	0.15					mA
	T _J =125°C	15					
Typical thermal resistance junction to ambient(Note 1)	R _{θJA}	40					°C/W
Typical thermal resistance junction to lead(Note 1)	R _{θJL}	18					°C/W
Typical thermal resistance junction to case(Note 1)	R _{θJC}	23					°C/W
Typical junction capacitance.Measured at 1.0MHz and applied reverse voltage of 4.0V DC	C _j	250					pF
Operating junction temperature range	T _J	- 55 to + 125			- 55 to + 150		°C
Storage temperature range	TSTG	- 55 to + 150					°C

Note: 1. Thermal Resistance at .375"(9.5mm)Lead Length, PC Board Mounted.

RATINGS AND CHARACTERISTIC CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

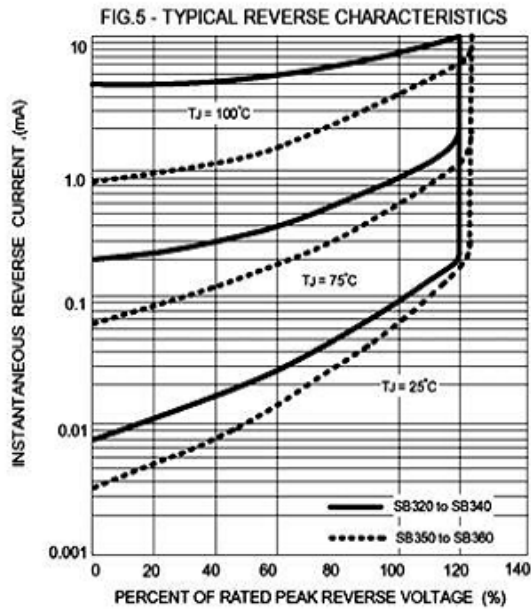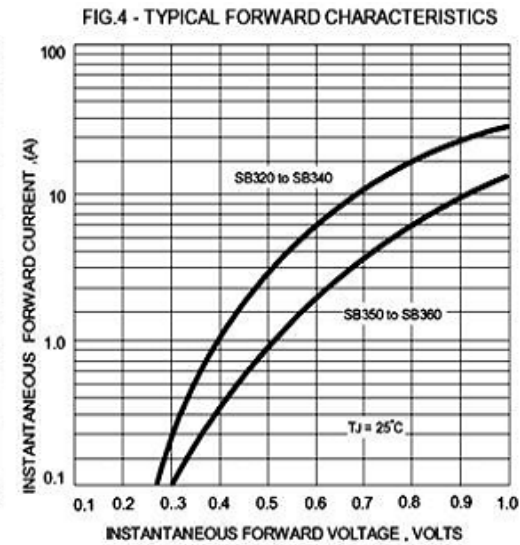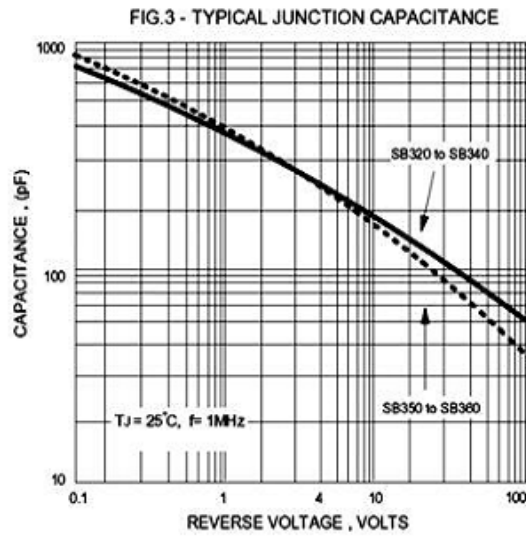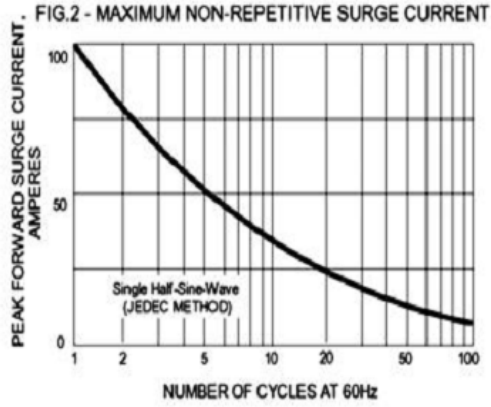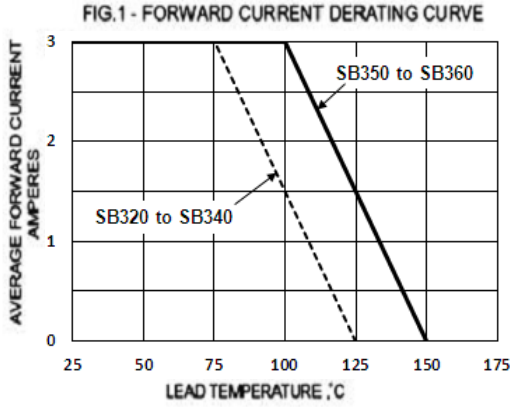

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Schottky Diodes & Rectifiers](#) category:

Click to view products by [Good-Ark](#) manufacturer:

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [GS1JE-TP](#) [RB160M-50TR](#) [BAS 3010S-02LRH E6327](#)
[BAT 54-02LRH E6327](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#)
[SBAT54CWT1G](#) [SBM30-03-TR-E](#) [SK310-T](#) [SK33A-TP](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#)
[MA4E2501L-1290](#) [MBRB30H30CT-1G](#) [BAS 70-02L E6327](#) [DMJ3940-000](#) [SB007-03C-TB-E](#) [SB10015M-TL-E](#) [SB1003M3-TL-E](#) [SK32A-](#)
[TP](#) [SK33B-TP](#) [SK35A-TP](#) [SK38B-LTP](#) [SK38B-TP](#) [NRVBM120LT1G](#) [NTE505](#) [NTSB30U100CT-1G](#) [VS-6CWQ10FNHM3](#)
[CRG04\(T5L,TEMQ\)](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA140-HF](#) [ACDBA2100-HF](#) [ACDBA240-HF](#) [ACDBA3100-HF](#)
[CDBQC0530L-HF](#) [BAT54-13-F](#) [ACDBA340-HF](#)