




SB520 thru SB5D0

Schottky Barrier Rectifiers
Reverse Voltage 20 to 200 Volts Forward Current 5.0 Amperes

Features


- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ Low power loss, high efficiency
- ◆ For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- ◆ Guardring for overvoltage protection

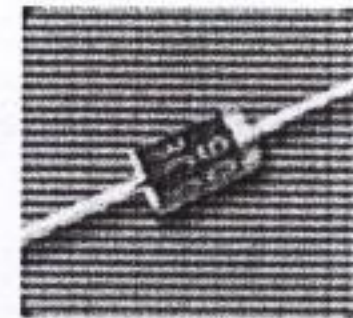

DO-201AD

Mechanical Data

- ◆ **Case:** JEDEC DO-201AD molded plastic body
- ◆ **Terminals:** Plated axial leads, solderable per MIL-STD-750, Method 2026
High temperature soldering guaranteed:
250°C/10 seconds 0.375" (9.5mm) lead length,
5lbs (2.3kg) tension
- ◆ **Polarity:** Color band denotes cathode end
- ◆ **Mounting Position:** Any
- ◆ **Weight:** 0.041 ounce, 1.15 grams

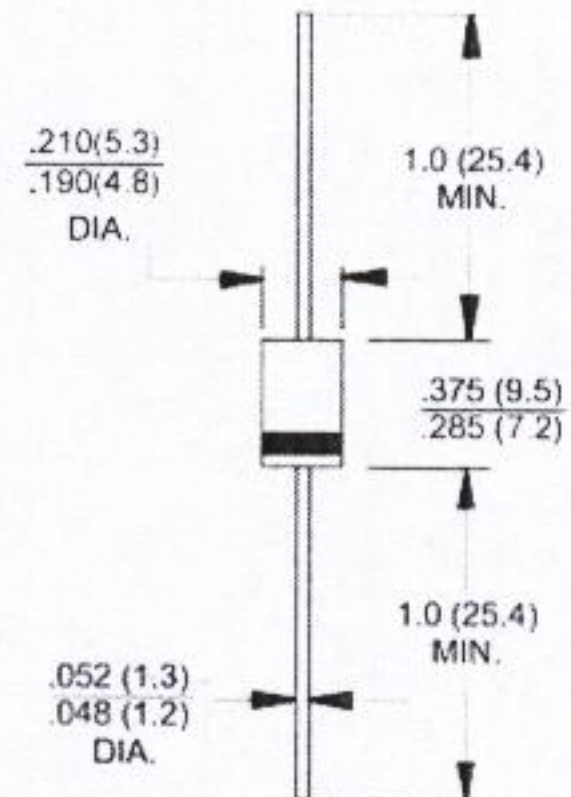

Maximum Ratings and Electrical Characteristics






($T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbols	SB520	SB530	SB540	SB550	SB560	SB590	SB580	SB5D0	Units	
Maximum repetitive peak reverse voltage	V_{RRM}	20	30	40	50	60	90	100	200	Volts	
Maximum RMS voltage	V_{RMS}	14	21	28	35	42	63	70	140	Volts	
Maximum DC blocking voltage	V_{DC}	20	30	40	50	60	90	100	200	Volts	
Maximum average forward rectified current 0.375" (9.5mm) lead length (See Fig.1)	I_{FOA}	5.0								Amps	
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) at rated T_A	I_{FSM}	200.0								150.0	Amps
Max. instantaneous forward voltage at 5.0A (Note 1)	V_f	0.55			0.67		0.85			Volts	
Maximum instantaneous reverse current at rated DC blocking voltage (Note 1)	I_R	0.5					0.2		0.01		mA
		50		25		10		10			
Typical thermal resistance (Note 2)	$R_{\theta JH}$ $R_{\theta JL}$	35					10		2		$^\circ\text{C/W}$
		2		2		2		2			
Operating junction temperature range	T_J	-55 to +150								$^\circ\text{C}$	
Storage temperature range	T_{STG}	-55 to +150								$^\circ\text{C}$	

- Notes:**
1. Pulse test: 300us pulse width, 1% duty cycle
 2. Thermal resistance junction to lead vertical P.C.B. mounted, 0.375" (9.5mm) lead length

RATINGS AND CHARACTERISTIC CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

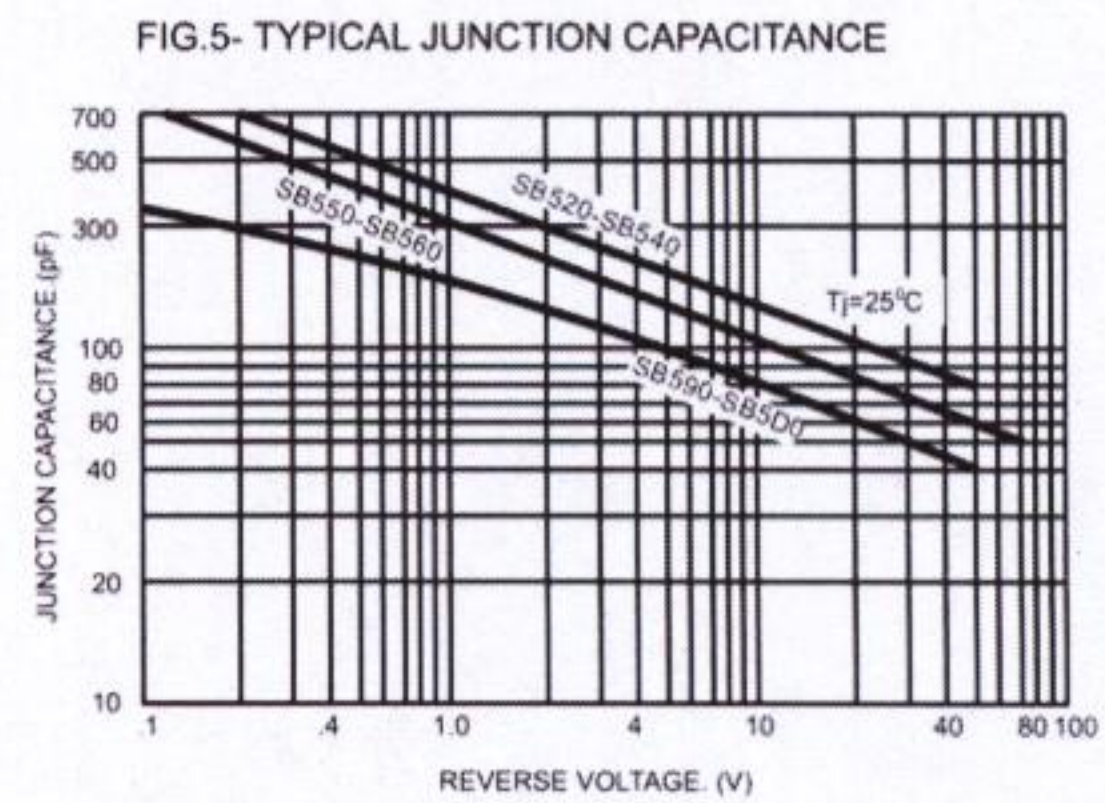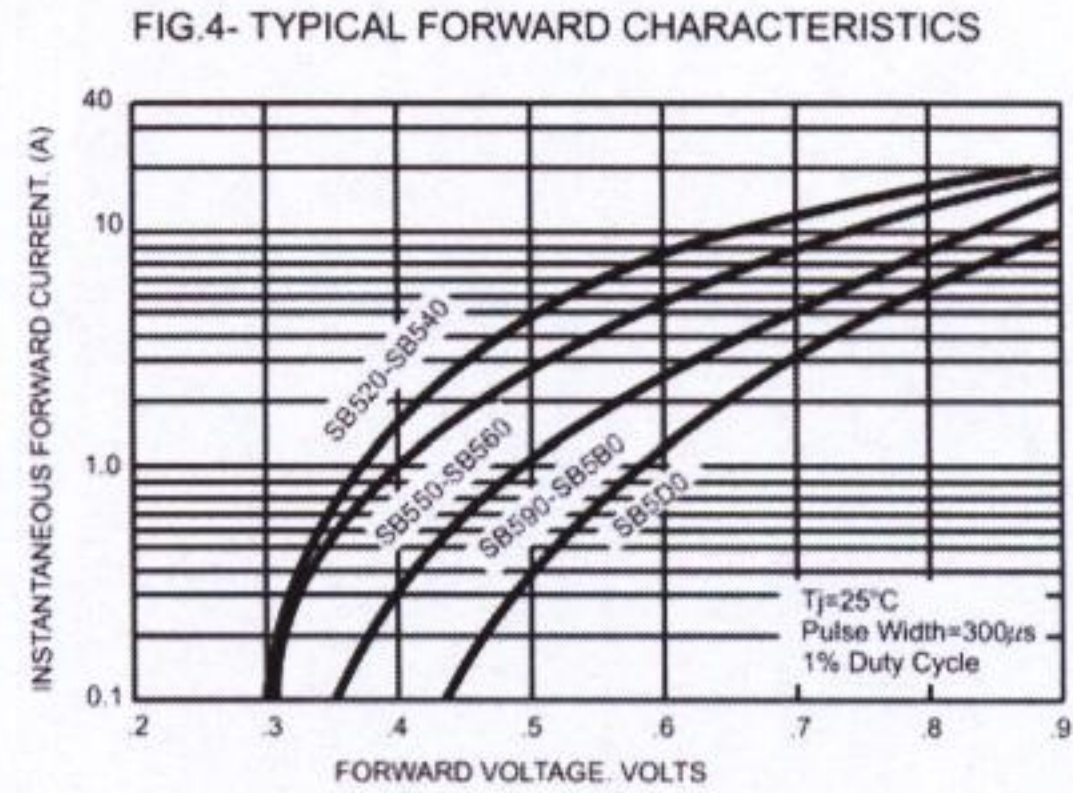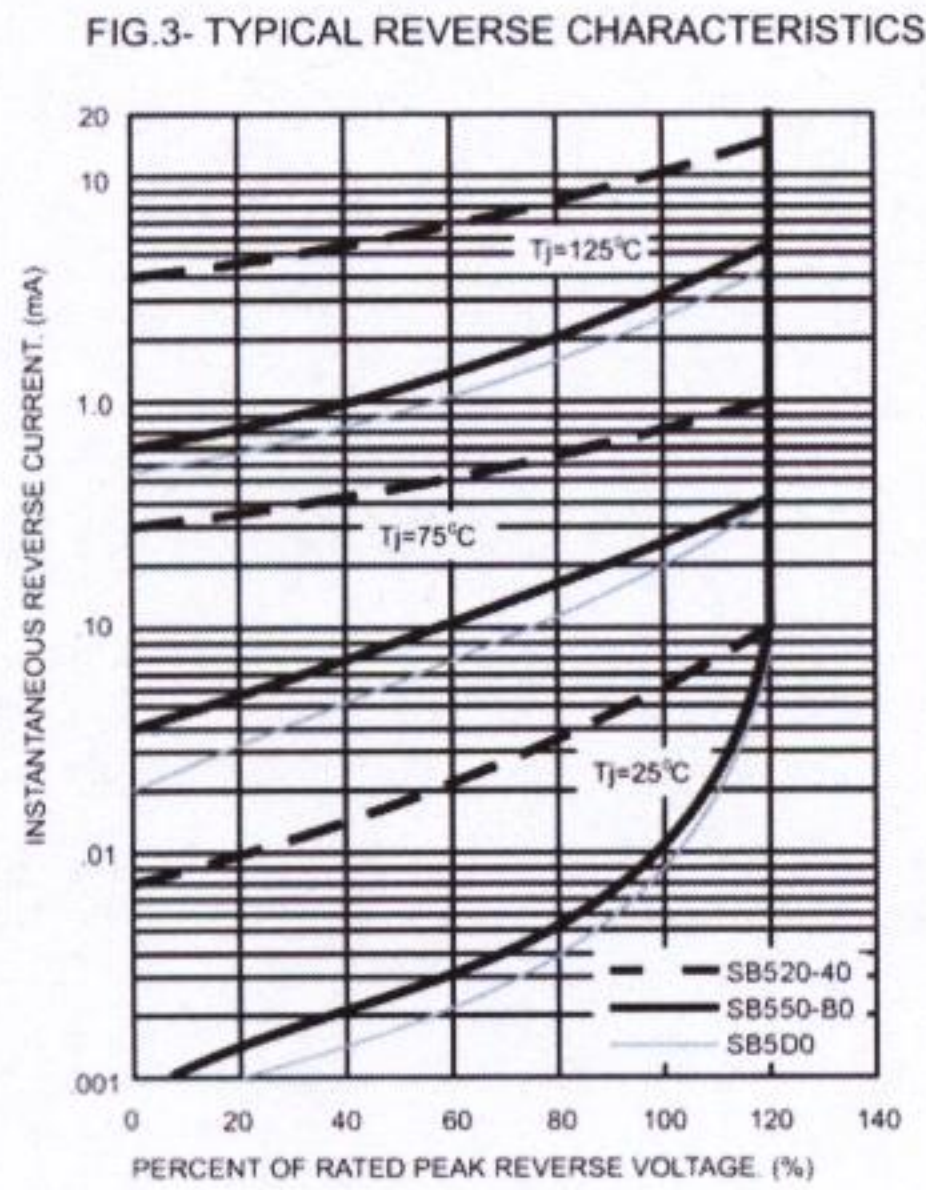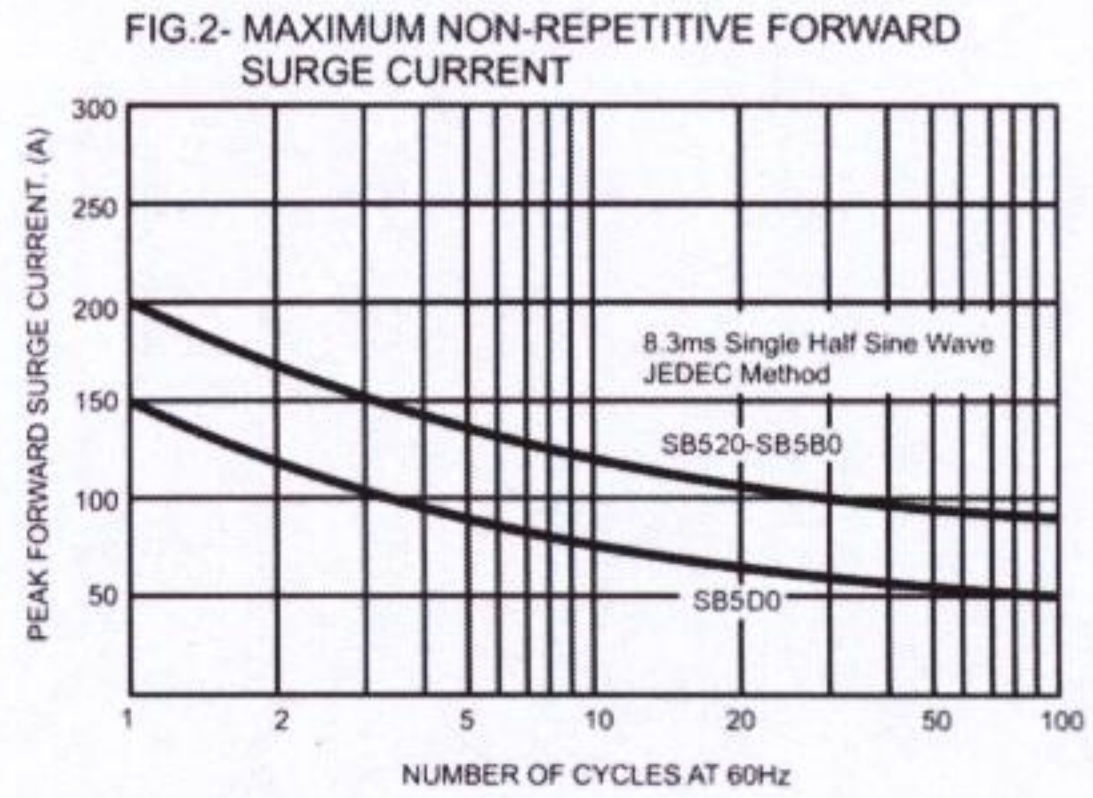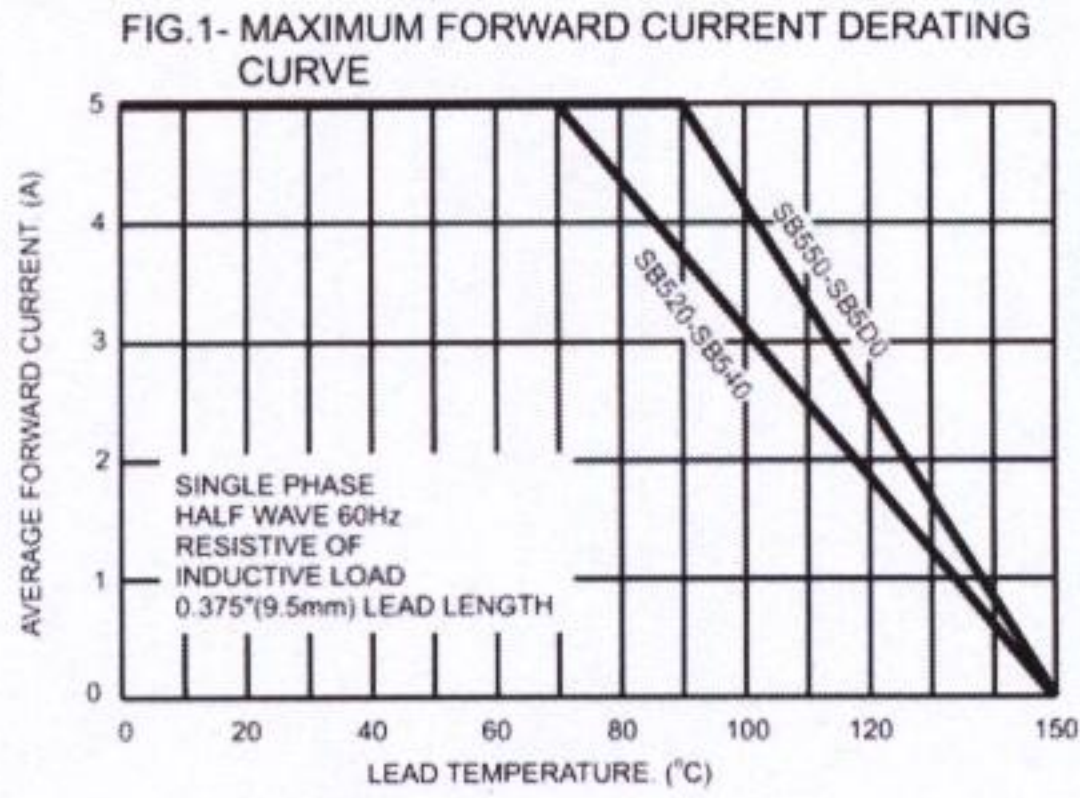

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Schottky Diodes & Rectifiers](#) category:

Click to view products by [Good-Ark](#) manufacturer:

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [GS1JE-TP](#) [RB160M-50TR](#) [BAS 3010S-02LRH E6327](#)
[BAT 54-02LRH E6327](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SBS818-TL-E](#) [SK310-T](#)
[SK33A-TP](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#) [MA4E2501L-1290](#) [MBRB30H30CT-1G](#)
[DMJ3940-000](#) [SB007-03C-TB-E](#) [SK32A-TP](#) [SK33B-TP](#) [SK35A-TP](#) [SK38B-LTP](#) [SK38B-TP](#) [NRVBM120LT1G](#) [NTE505](#)
[NTSB30U100CT-1G](#) [SS0503SH-TL-E](#) [VS-6CWQ10FNHM3](#) [CRG04\(T5L,TEMQ\)](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA2100-HF](#)
[ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [ACDBA260LR-HF](#) [ACDBA1100-HF](#) [MA4E2502L-1246](#) [10BQ060-M3/5BT](#)
[NRVB130LSFT1G](#) [CRS08TE85LQM](#) [PMAD1108-LF](#)