


FEATURE


- High density cell design for low $R_{DS(ON)}$
- Voltage controlled small signal switch
- Rugged and reliable
- High saturation current capability

SOT-23

1. GATE
2. SOURCE
3. DRAIN




Equivalent Circuit



Marking

Type number	Marking code
2N7002K	7002

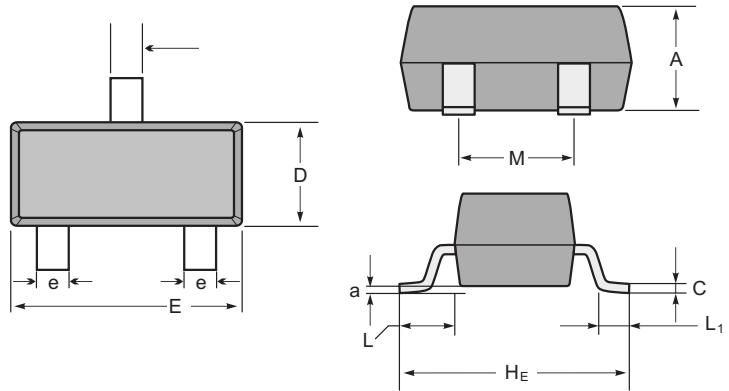

SOT-23 mechanical data

UNIT	A	C	D	E	H _E	e	M	L	L ₁	a	
mm	max	1.1	0.15	1.4	3.0	2.6	0.5	1.95	0.55 (ref)	0.36 (ref)	0.0
	min	0.9	0.08	1.2	2.8	2.2	0.3	1.7			0.15
mil	max	43	6	55	118	102	20	77	22 (ref)	14 (ref)	0.0
	min	35	3	47	110	87	12	67			6

MOSFET MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$ unless otherwise noted)






Symbol	Parameter	Value	Units
V_{DS}	Drain-Source voltage	60	V
V_{GS}	Gate-Source voltage	20	V
I_D	Drain Current	340	mA
P_D	Power Dissipation	0.35	W
T_J	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature	-55-150	$^\circ\text{C}$
$R_{\theta JA}$	Thermal Resistance from Junction to Ambient	357	$^\circ\text{C} / \text{W}$

2N7002K

MOSFET ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min	Typ	Max	Units
Static Characteristics						
Drain-Source Breakdown Voltage	V _{DS}	V _{GS} = 0V, I _D =250μA	60			V
Gate Threshold Voltage*	V _{GS(th)}	V _{DS} =V _{GS} , I _D =1mA	1		2.5	V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =48V, V _{GS} = 0V			1	μA
Gate –Source leakage current	I _{GSS1}	V _{GS} =±20V, V _{DS} = 0V			±10	μA
	I _{GSS2}	V _{GS} =±10V, V _{DS} = 0V			±200	nA
	I _{GSS3}	V _{GS} =±5V, V _{DS} = 0V			±100	nA
Drain-Source On-Resistance*	R _{DS(on)}	V _{GS} = 4.5V, I _D =200mA		1.7	5.3	Ω
		V _{GS} =10V, I _D =500mA			5	Ω
Diode Forward Voltage	V _{SD}	V _{GS} =0V, I _S =300mA			1.5	V
Recovered charge	Q _r	V _{GS} =0V, I _S =300mA, V _R =25V, dI _S /dt=-100A/μS		30		nC
Dynamic Characteristics**						
Input Capacitance	C _{iSS}	V _{DS} =10V, V _{GS} =0V, f =1MHz			40	pF
Output Capacitance	C _{oSS}				30	pF
Reverse Transfer Capacitance	C _{rSS}				10	pF
Switching Characteristics**						
Turn-On Delay Time	t _{d(on)}	V _{GS} =10V, V _{DD} =50V, R _G =50Ω, R _{GS} =50Ω, R _L =250Ω			10	ns
Turn-Off Delay Time	t _{d(off)}				15	ns
Reverse recovery Time	t _{rr}	V _{GS} =0V, I _S =300mA, V _R =25V, dI _S /dt=-100A/μS		30		ns
GATE-SOURCE ZENER DIODE						
Gate-Source Breakdown Voltage	BV _{GSO}	I _{GS} =±1mA (Open Drain)	±21.5		±30	V

RATING AND CHARACTERISTIC CURVES (2N7002K)

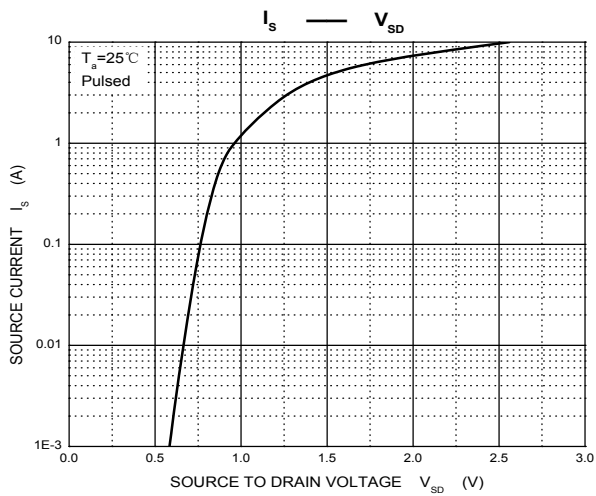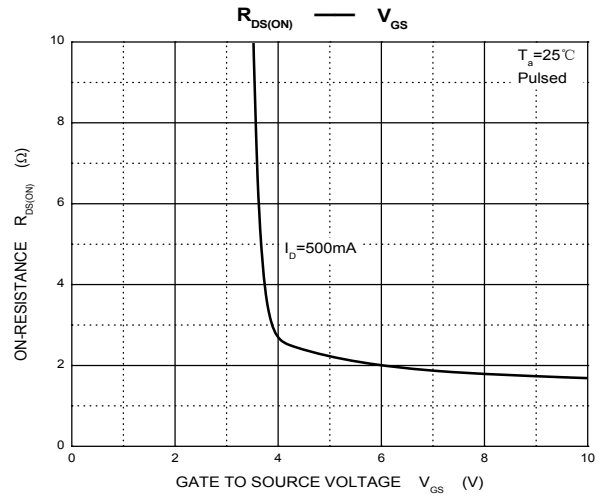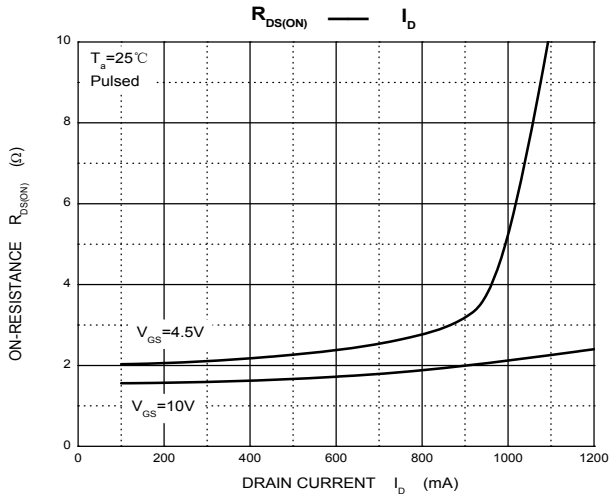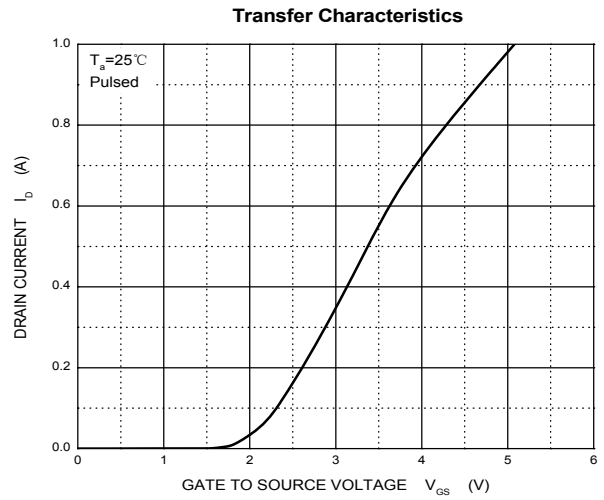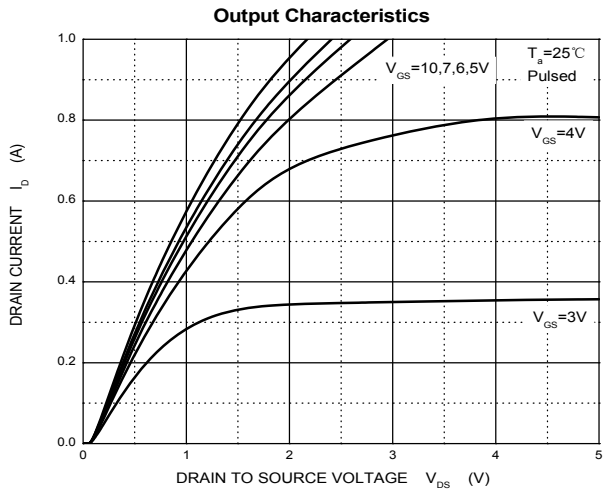

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [GOODWORK](#) manufacturer:

Other Similar products are found below :

[IRFD120](#) [JANTX2N5237](#) [2SK2267\(Q\)](#) [BUK455-60A/B](#) [TK100A10N1,S4X\(S](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#)
[IRS2092STRPBF-EL](#) [IPS70R2K0CEAKMA1](#) [TK31J60W5,S1VQ\(O](#) [TK31J60W,S1VQ\(O](#) [TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#)
[DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#) [NTE2384](#) [DMC2700UDMQ-7](#) [DMN2080UCB4-7](#)
[DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [IPS60R3K4CEAKMA1](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#)
[STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#) [DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [IPS60R360PFD7SAKMA1](#)
[DMN2990UFB-7B](#) [SSM3K35CT,L3F](#) [IPLK60R1K0PFD7ATMA1](#) [2N7002W-G](#) [MCAC30N06Y-TP](#) [IPWS65R035CFD7AXKSA1](#)
[MCQ7328-TP](#) [SSM3J143TU,LXHF](#) [DMN12M3UCA6-7](#) [PJMF280N65E1_T0_00201](#) [PJMF380N65E1_T0_00201](#)
[PJMF280N60E1_T0_00201](#) [PJMF600N65E1_T0_00201](#) [PJMF900N65E1_T0_00201](#)