

FEATURES

- * Ideal for printed circuit board
- * Low forward voltage
- * Low leakage current
- * Polarity: marked on body
- * Mounting position: Any


VOLTAGE RANGE

600 to 1000 Volts

CURRENT

6.0 Ampere

D3K

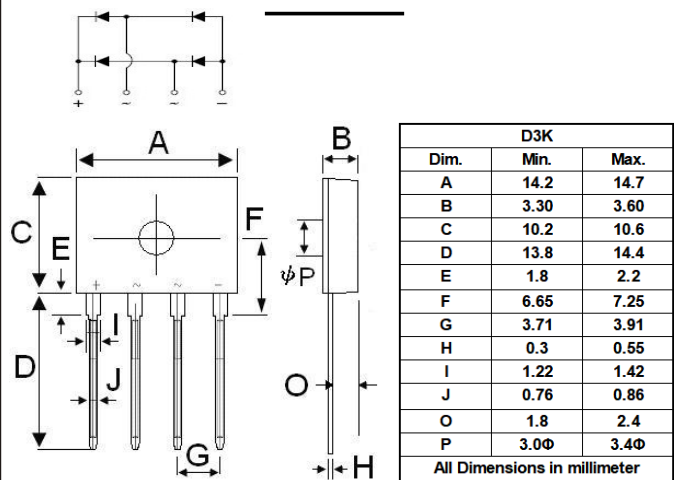

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

	Symbols	D6UB60	D6UB80	D6UB100	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	600	800	1000	Volts
Average Rectified Output Current	$I_{(AV)}$	Without heat sink @ $T_c=90^\circ C$ With heat sink @ $T_c=90^\circ C$		3.0 6.0	Amp
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I_{FSM}			150	Amp
Maximum Forward Voltage at 6.0A DC and 25°C	V_F			1.1	Volts
Maximum Reverse Current at Rated DC Blocking Voltage	I_R	at $T_A=25$ $T_A=100$		5.0 500	uAmp
Typical Junction Capacitance (Note 1)	C_J			21	pF
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$			55	/W
Typical Thermal Resistance (Note 2)	$R_{\theta JL}$			15	/W
Operating and Storage Temperature Range	T_J, T_{stg}			-55 to +150	

NOTES:

- 1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.
- 2- Thermal Resistance Junction to Ambient and form junction to lead at 0.375"(9.5mm) lead length P.C.B. Mounted.

RATING AND CHARACTERISTIC CURVES (D6UB60 THRU D6UB100)

Fig. 1 Output Current Derating Curve

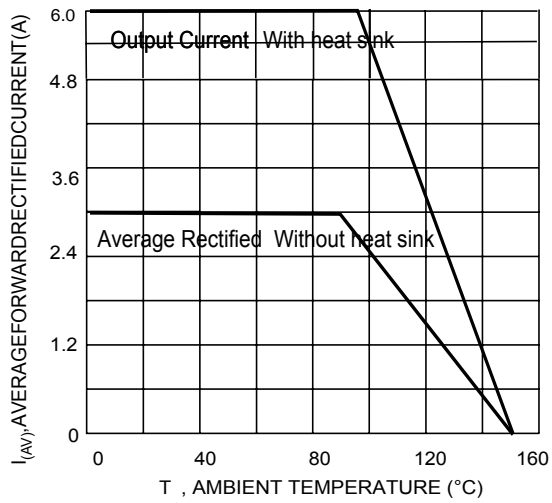


Fig. 2 Typical I Forward Characteristics (per leg)

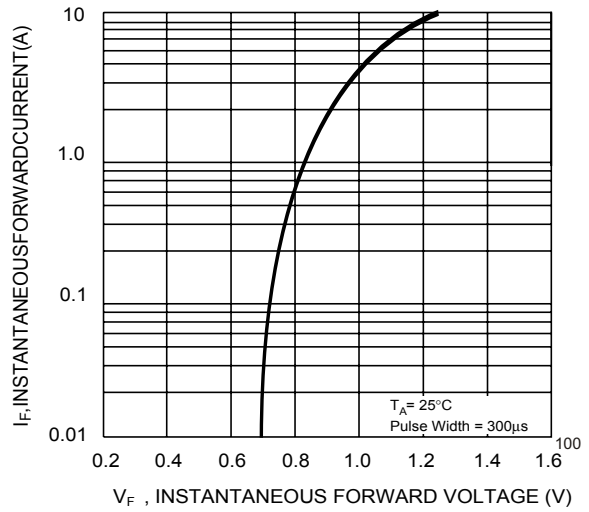


Fig. 3 Maximum Peak Forward Surge Current (per leg)

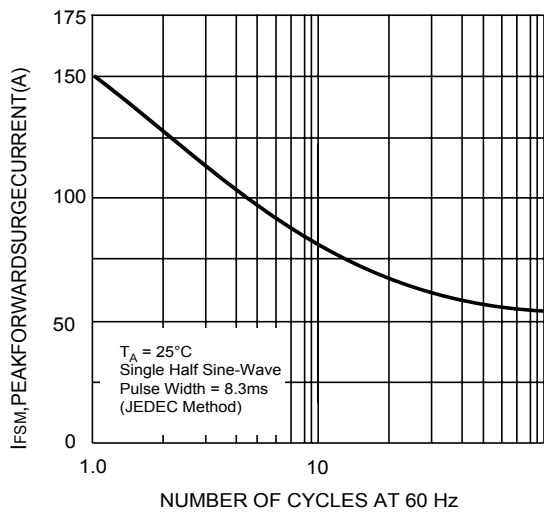


Fig. 4 Typical Junction Capacitance Per Diode


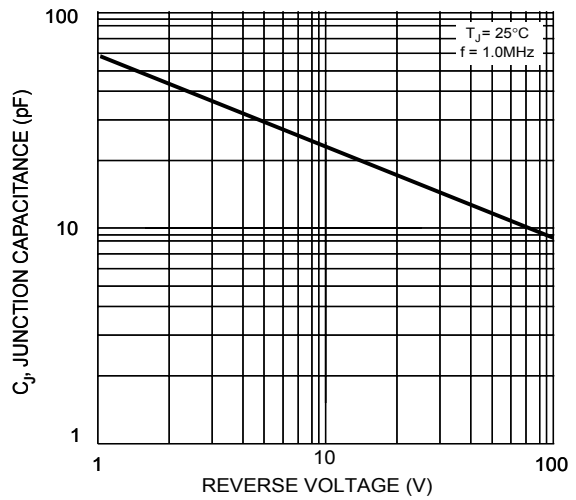


Fig. 5 T typical Reverse Characteristics (per element)

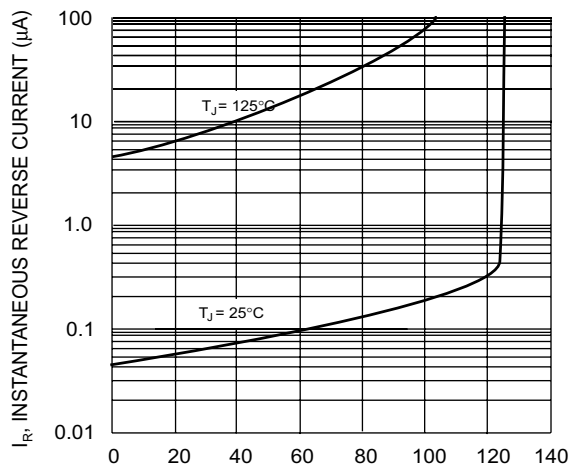

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bridge Rectifiers](#) category:

Click to view products by [GOODWORK](#) manufacturer:

Other Similar products are found below :

[MB2510](#) [MB252](#) [MB356G](#) [MB358G](#) [MP358-BP](#) [90MT160KPBF](#) [GBJ1504-BP](#) [GBU10B-BP](#) [GBU15J-BP](#) [GBU15K-BP](#) [GBU4A-BP](#)
[GBU4D-BP](#) [GSIB680-E3/45](#) [DB101-BP](#) [DF01](#) [DF10SA-E345](#) [BU1508-E3/45](#) [BU1510-E3/45](#) [KBPC50-10S](#) [RS405GL-BP](#) [26MT120](#)
[G5SBA60-E3/51](#) [GBJ1502-BP](#) [GBU10J-BP](#) [GBU4J-BP](#) [GBU6M](#) [GBU8D-BP](#) [GBU8J-BP](#) [GSIB1520-E3/45](#) [TB102M](#) [MB1510](#) [MB6M-G](#)
[MB86](#) [TL401G](#) [MDA920A2](#) [TU602](#) [TU810](#) [MP501W-BP](#) [MP502-BP](#) [BR1005-BP](#) [BR101-BP](#) [BR84DTP204](#) [BU1010A-E3/51](#) [BU1508-](#)
[E3/51](#) [BU2006-E3/45](#) [BU2008-E3/51](#) [US15KB80R-7000](#) [KBPC25-02](#) [VS-60MT120KPBF](#) [DB105-BP](#)