

# MBRS2045 THRU MBRS20200

## 20 AMP SCHOTTKY BARRIER RECTIFIERS

### FEATURES

- \* Low forward voltage drop
- \* High current capability
- \* High reliability
- \* High surge current capability
- \* Epitaxial construction

### MECHANICAL DATA

- \* Case: Molded plastic
- \* Epoxy: UL 94V-0 rate flame retardant
- \* Lead: Lead solderable per MIL-STD-202, method 208 guaranteed
- \* Polarity: As Marked
- \* Mounting position: Any
- \* Weight: 2.24 grams


### VOLTAGE RANGE

45 to 100 Volts

### CURRENT

20 Ampere

### TO-263 / D<sup>2</sup>PAK

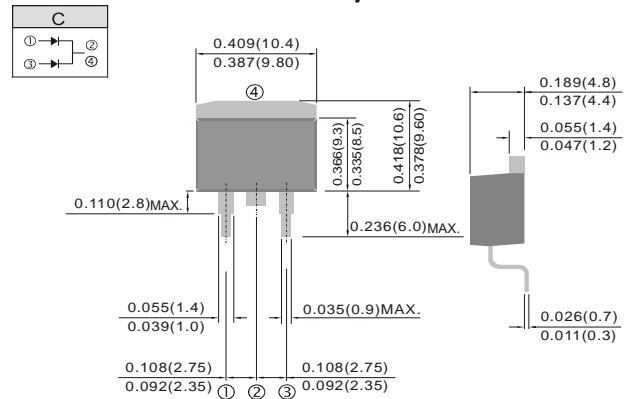

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.  
Single phase half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

| TYPE NUMBER   | MBRS<br>2045 | MBRS<br>2060 | MBRS<br>20100 | MBRS<br>20150 | MBRS<br>20200 | UNITS |
|---|--------------|--------------|---------------|---------------|---------------|-------|
| Maximum Recurrent Peak Reverse Voltage  | 45           | 60           | 100           | 150           | 200           | V     |
| Maximum RMS Voltage   | 32           | 42           | 70            | 105           | 140           | V     |
| Maximum DC Blocking Voltage   | 45           | 60           | 100           | 150           | 200           | V     |
| Maximum Average Forward Rectified Current<br>.375"(9.5mm) Lead Length at Tc=100°C                     | 20           |              |               |               |               | A     |
| Peak Forward Surge Current, 8.3 ms single half sine-wave<br>superimposed on rated load (JEDEC method) | 175          |              |               |               |               | A     |
| Maximum Instantaneous Forward Voltage at 20A  | 0.55         | 0.75         | 0.85          | 0.92          |               | V     |
| Maximum DC Reverse Current<br>at Rated DC Blocking Voltage  | 0.1          |              | 0.02          |               |               | mA    |
|   | 5            |              | 2             |               |               |       |
| Typical Junction Capacitance (Note1)  | 900          |              |               |               |               | pF    |
| Typical Thermal Resistance R <sub>JA</sub> (Note 2)   | 3.5          |              |               |               |               | °C/W  |
| Operating Temperature Range T <sub>J</sub>  | -55 — +150   |              |               |               |               | °C    |
| Storage Temperature Range T <sub>STG</sub>  | -55 — +150   |              |               |               |               | °C    |

#### NOTES:

1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2. Thermal Resistance Junction to Ambient Vertical PC Board Mounting 0.5"(12.7mm) Lead Length.

## RATING AND CHARACTERISTIC CURVES (MBRS2045 THRU MBRS20200)

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

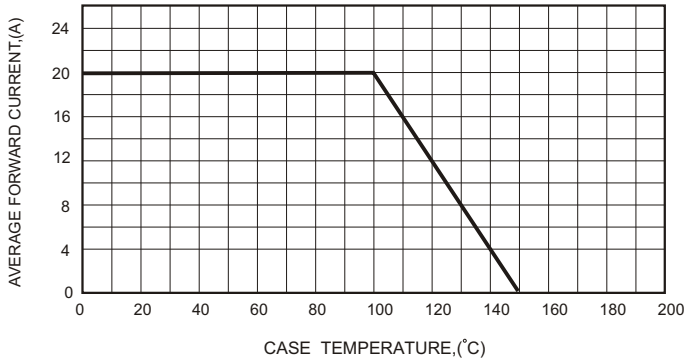


FIG.2-TYPICAL FORWARD CHARACTERISTICS

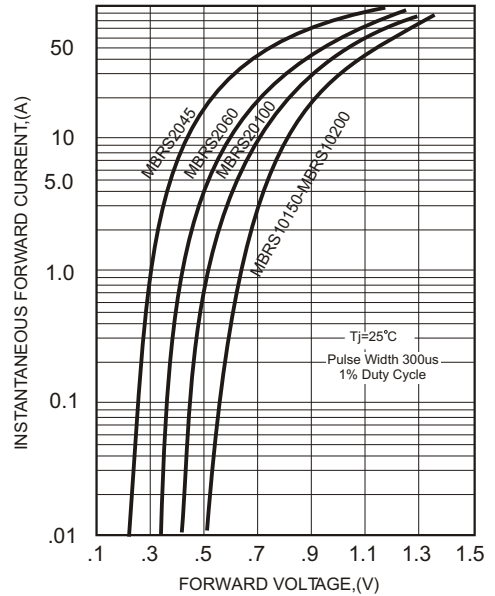


FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

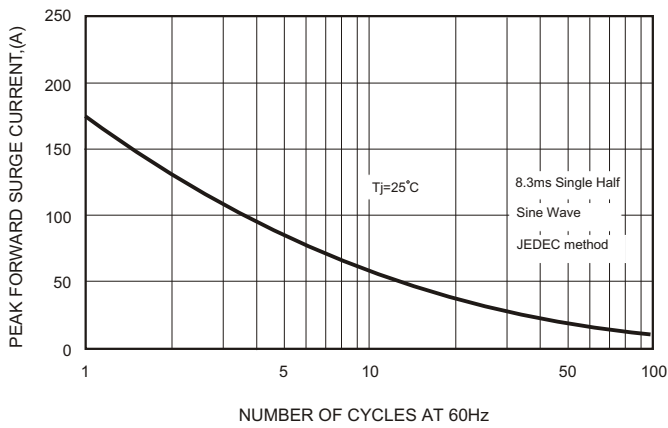


FIG.5 - TYPICAL REVERSE CHARACTERISTICS


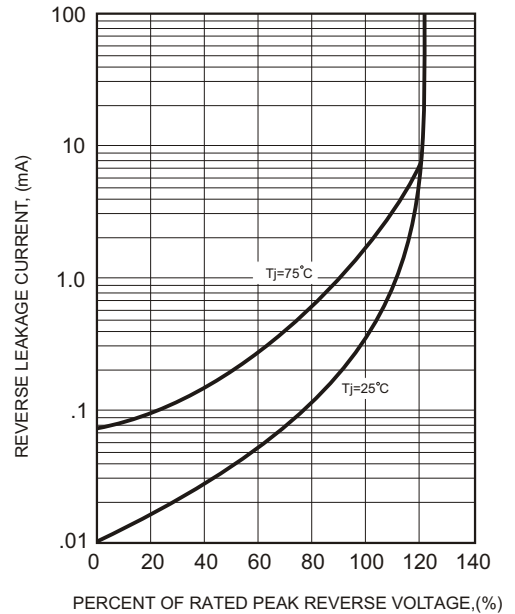


FIG.4-TYPICAL JUNCTION CAPACITANCE

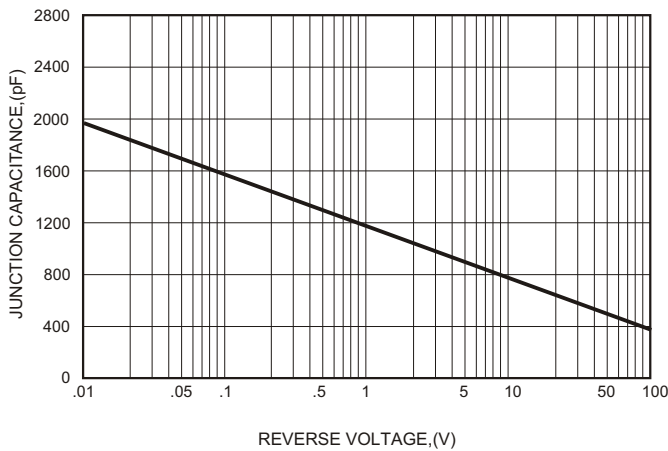

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Schottky Diodes & Rectifiers](#) category:*

*Click to view products by [GOODWORK](#) manufacturer:*

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR1545CT](#) [MMBD301M3T5G](#) [RB160M-50TR](#) [D83C](#) [BAS16E6433HTMA1](#) [BAT 54-02LRH E6327](#)  
[NRVBAF360T3G](#) [NSR05F40QNXT5G](#) [NTE555](#) [JANS1N6640](#) [SK310-T](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [GA01SHT18](#)  
[CRS10I30A\(TE85L,QM](#) [MA4E2501L-1290](#) [MBRA140TRPBF](#) [MBRB30H30CT-1G](#) [BAT 15-04R E6152](#) [JANTX1N5712-1](#) [DMJ3940-000](#)  
[SB007-03C-TB-E](#) [SK33B-TP](#) [NRVBB20100CTT4G](#) [NRVBM120LT1G](#) [NTSB30U100CT-1G](#) [VS-6CWQ10FNHM3](#) [CRG04\(T5L,TEMQ\)](#)  
[ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [CDBQC0240LR-HF](#) [ACDBA260LR-HF](#)  
[ACDBA1100-HF](#) [MA4E2502L-1246](#) [10BQ015-M3/5BT](#) [NRVBM120ET1G](#) [CRS08TE85LQM](#) [PMAD1108-LF](#) [B120Q-13-F](#) [1N5819T-G](#)  
[B0530WSQ-7-F](#) [PDS1040Q-13](#) [B160BQ-13-F](#) [SDM05U20CSP-7](#) [B140S1F-7](#)