

### FEATURES

- Total power dissipation: Max. 300mW.
- Wide zener reverse voltage range 2.0V to 75V.
- Small plastic package suitable for surface mounted design.
- Tolerance approximately  $\pm 2\%$


### MECHANICAL DATA

- Case: SOD-323
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 5.48mg / 0.00019oz

## VOLTAGE RANGE

2.0 to 75 Volts

300mW

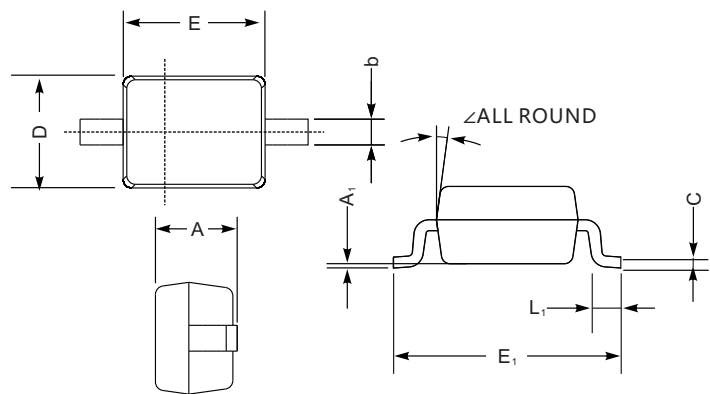

SOD-323 mechanical data

UNIT		A	C	D	E	E <sub>1</sub>	b	L <sub>1</sub>	A <sub>1</sub>	Z
mm	max	1.1	0.15	1.4	1.8	2.75	0.4	0.45	0.2	9°
	min	0.8	0.08	1.2	1.4	2.55	0.25	0.2	—	
mil	max	43	5.9	55	70	108	16	16	8	
	min	32	3.1	47	63	100	9.8	7.9	—	

### Absolute Maximum Ratings And Characteristics ( Ta = 25 °C )

Parameter	Symbol	Value	Unit
Power Dissipation	P <sub>tot</sub>	300	mW
Forward Voltage at I <sub>F</sub> = 10 mA	V <sub>F</sub>	0.9	V
Typical thermal resistance junction to ambient <sup>(1)</sup>	R <sub>θJA</sub>	417	°C/W
Operating and Storage Temperature Range	T <sub>j</sub> , T <sub>stg</sub>	-55 ~ +150	°C

(1) Thermal resistance from junction to ambient at P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper areas pads.

# MM3Z2V0B THRU MM3Z75B

Fig.1 Maximum Continuous Power Derating


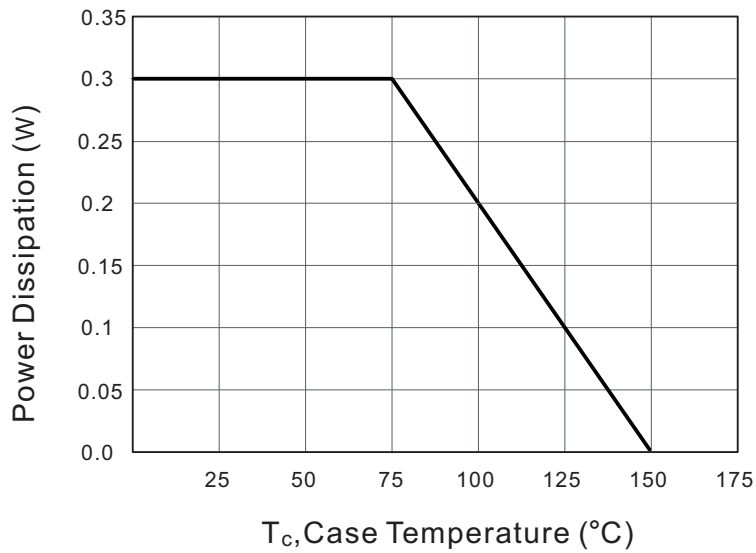


Fig.2 Typical Transient Thermal Impedance

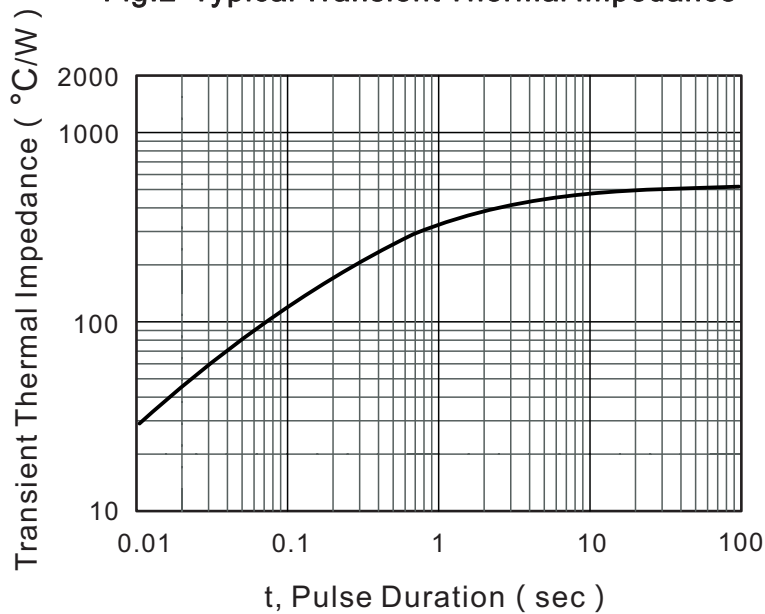

# MM3Z2V0B THRU MM3Z75B

Characteristics at Ta = 25°C

Type	Marking	Zener Voltage Range <sup>(1)</sup>			I <sub>ZT</sub>	Dynamic Impedance	Reverse Current	
		V <sub>ZT</sub> ( at I <sub>ZT</sub> )				Z <sub>ZT</sub> ( at I <sub>ZT</sub> )	I <sub>R</sub>	at V <sub>R</sub>
		Min ( V )	Nom ( V )	Max ( V )	(mA)	Max (Ω)	Max ( μA )	( V )
MM3Z2V0B	0B	1.96	2.0	2.04	5	100	120	0.5
MM3Z2V2B	0C	2.16	2.2	2.24	5	100	120	0.7
MM3Z2V4B	C1	2.35	2.4	2.45	5	100	120	1
MM3Z2V7B	D1	2.65	2.7	2.75	5	110	120	1
MM3Z3V0B	E1	2.94	3.0	3.06	5	120	50	1
MM3Z3V3B	F1	3.23	3.3	3.37	5	130	20	1
MM3Z3V6B	H1	3.53	3.6	3.67	5	130	10	1
MM3Z3V9B	J1	3.82	3.9	3.98	5	130	5	1
MM3Z4V3B	K1	4.21	4.3	4.39	5	130	5	1
MM3Z4V7B	M1	4.61	4.7	4.79	5	130	2	1
MM3Z5V1B	N1	5	5.1	5.2	5	130	2	1.5
MM3Z5V6B	P1	5.49	5.6	5.71	5	80	1	2.5
MM3Z6V2B	R1	6.08	6.2	6.32	5	50	1	3
MM3Z6V8B	X1	6.66	6.8	6.94	5	30	0.5	3.5
MM3Z7V5B	Y1	7.35	7.5	7.65	5	30	0.5	4
MM3Z8V2B	Z1	8.04	8.2	8.36	5	30	0.5	5
MM3Z9V1B	A2	8.92	9.1	9.28	5	30	0.5	6
MM3Z10B	B2	9.8	10	10.2	5	30	0.1	7
MM3Z11B	C2	10.78	11	11.22	5	30	0.1	8
MM3Z12B	D2	11.76	12	12.24	5	35	0.1	9
MM3Z13B	E2	12.74	13	13.26	5	35	0.1	10
MM3Z15B	F2	14.7	15	15.3	5	40	0.1	11
MM3Z16B	H2	15.68	16	16.32	5	40	0.1	12
MM3Z18B	J2	17.64	18	18.36	5	45	0.1	13
MM3Z20B	K2	19.6	20	20.4	5	50	0.1	15
MM3Z22B	M2	21.56	22	22.44	5	55	0.1	17
MM3Z24B	N2	23.52	24	24.48	5	60	0.1	19
MM3Z27B	P2	26.46	27	27.54	2	70	0.1	21
MM3Z30B	R2	29.4	30	30.60	2	80	0.1	23
MM3Z33B	X2	32.34	33	33.66	2	80	0.1	25
MM3Z36B	Y2	35.28	36	36.72	2	90	0.1	27
MM3Z39B	Z2	38.22	39	39.78	2	100	0.1	30
MM3Z43B	A3	42.14	43	43.86	2	130	0.1	33
MM3Z47B	B3	46.06	47	47.94	2	150	0.1	36
MM3Z51B	C3	49.98	51	52.02	2	180	0.1	39
MM3Z56B	D3	54.88	56	57.12	2	200	0.1	43
MM3Z62B	E3	60.76	62	63.24	2	215	0.1	47
MM3Z68B	F3	66.64	68	69.36	2	240	0.1	52
MM3Z75B	H3	73.5	75	76.5	2	265	0.1	56

( 1 ) V<sub>ZT</sub> is tested with pulses (20 ms)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Zener Diodes](#) category:*

*Click to view products by [GOODWORK](#) manufacturer:*

Other Similar products are found below :

[RKZ13B2KG#P1](#) [DL5234B](#) [EDZTE6113B](#) [1N4682](#) [1N4693](#) [1N4732A](#) [1N4736A](#) [1N4750A](#) [1N4759ARL](#) [1N5241B](#) [1N5365B](#) [1N5369B](#)  
[1N747A](#) [1N964B](#) [1N966B](#) [1N968B](#) [1N972B](#) [JANS1N4974US](#) [JANTX1N5907](#) [1N4692](#) [1N4700](#) [1N4702](#) [1N4704](#) [1N4711](#) [1N4714](#)  
[1N4745ARL](#) [1N4752ARL](#) [1N4760ARL](#) [1N5221B](#) [1N5242BTR](#) [1N5350B](#) [1N5352B](#) [1N961BRR1](#) [1N964BRL](#) [RKZ5.1BKU#P6](#)  
[3SMAJ5946B-TP](#) [3SMAJ5950B-TP](#) [3SMBJ5925B-TP](#) [MMSZ5230BQ-13-F](#) [MMSZ5232BQ-13-F](#) [BZX84C7V5](#) [3SMAJ5945B-TP](#)  
[3SMAJ5947B-TP](#) [3SMBJ5941B-TP](#) [DL4732A-T3](#) [DZ2S240M0L](#) [SMAZ27-TP](#) [ZMM5224B-7](#) [RD16UM-T1-A](#) [RD39S-T1-A](#)