



GORE® SMT EMI Gaskets and Grounding Pads

Excellent electrical performance with SMT convenience


GORE® SMT EMI Gaskets and Grounding Pads combine unsurpassed conductivity with the convenience of SMT-compatible format. These conformable components are engineered to maintain consistent contact and low DC resistance. Unlike the traditional designs of pogo pins and universal clips that can easily break, the robust design of GORE® SMT EMI Gaskets and Grounding Pads increase durability with large contact surfaces rather than single-point contacts. The unique construction of GORE® SMT EMI Gaskets and Grounding Pads ensures that the device maintains signal integrity and reliable electrical performance in harsh environments.

Because of their compatibility with SMT equipment for printed circuit board production, GORE® SMT EMI Gaskets and Grounding Pads reduces total costs. Using these off-the-shelf components eliminates the need for custom designs that can increase engineering costs. Also, no secondary processing is required, which reduces equipment and labor costs during production. Using precise SMT equipment to incorporate GORE® SMT EMI Gaskets and Grounding Pads improves the consistency and repeatability of PCB assembly, thus decreasing waste.

GORE® SMT EMI Gaskets and Grounding Pads offer a full spectrum of working ranges, making them ideal for use as grounding pads, EMI gaskets, and antenna contacts. The highly compressible SMT Supersoft Series delivers consistent electrical performance with minimal force required for initial conductivity. The SMT GS5200 Series offers the highest conductivity under compression in Gore's EMI shielding product line. In addition to these high-performance characteristics, GORE® SMT EMI Gaskets and Grounding Pads have been tested against a variety of environmental standards (Table 1).

TYPICAL APPLICATIONS

- Portable electronic devices such as smartphones and tablets
- GPS and handheld scanners/readers
- Gaming devices
- Personal computers and laptops
- Telecommunication infrastructure

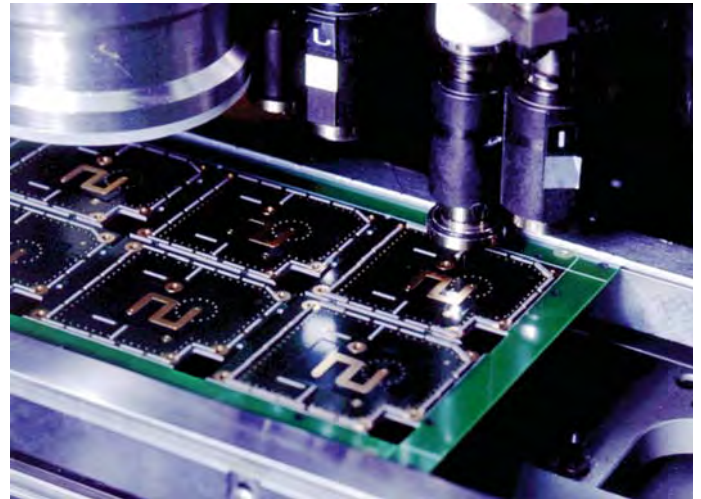

Benefits of GORE® SMT EMI Gaskets and Grounding Pads

- Excellent shielding effectiveness and low DC resistance with conformable construction
- Reliable electrical performance achieved through consistent contact over time
- Reduced total costs versus custom options due to standard sizes and compatibility with SMT technology
- Increased design flexibility with easily integrated standard parts
- Consistent and repeatable assembly with parts that need no secondary processing
- Enhanced durability due to conformable material that maintains contact over time without compromising the integrity of the mating surface
- Faster production times because of standard solder process that requires no cure time

GORE® SMT EMI Gaskets and Grounding Pads are covered by patent No. US 6,255,581 B1 and US 6,210,789 B1. Corresponding foreign patents issued.

GORE® SMT EMI Gaskets and Grounding Pads - SMT Supersoft Series is covered by patent No. US 6,255,581 B1 and US 7,129,421 B2. Corresponding foreign patents issued.



GORE® SMT EMI Gaskets and Grounding Pads

TABLE 1: ENVIRONMENTAL PROPERTIES

| Property | Value |
|---|----------------|
| Operating temperatures | -55°C to 125°C |
| RoHS Status* (lead, cadmium, hexavalent chromium, mercury, bromine) | Pass |
| Flammability in accordance with UL horizontal burn method | Pass |

*W. L. Gore & Associates declares that we do not intentionally add substances listed in EU Directive 2011/65/EU to GORE® SMT EMI Gaskets and Grounding Pads. Independent lab tests have been performed and results are available upon request.

SELECTION GUIDELINES

GORE® SMT EMI Gaskets and Grounding Pads are engineered to survive multiple reflow processes. These gaskets and grounding pads maintain conductivity in a wide range of service heights (gap distances). The closure force requirements and broad range of tolerance take-up in these materials results in multiple product options for some gap distances. Selecting the most suitable product for a given application depends on the following:

- Gap distance of interfacing surfaces
- Required compression force to achieve the specified gap distance
- Necessary DC resistance for grounding applications or shielding effectiveness for shielding applications at a specific gap distance

The recommended service height for the various products in GORE® SMT EMI Gaskets and Grounding Pads differs because of their unique constructions (Figures 1 & 2).

FIGURE 1: RECOMMENDED COMPRESSED PART HEIGHTS FOR SMT SUPERSOFT SERIES


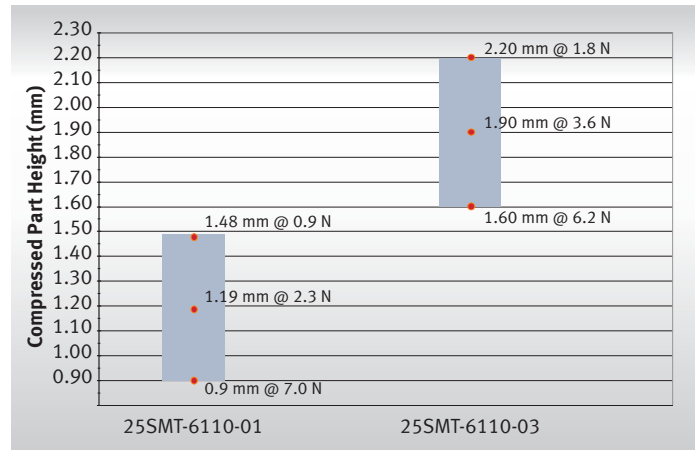


FIGURE 2: RECOMMENDED SERVICE HEIGHTS FOR SMT GS5200 SERIES

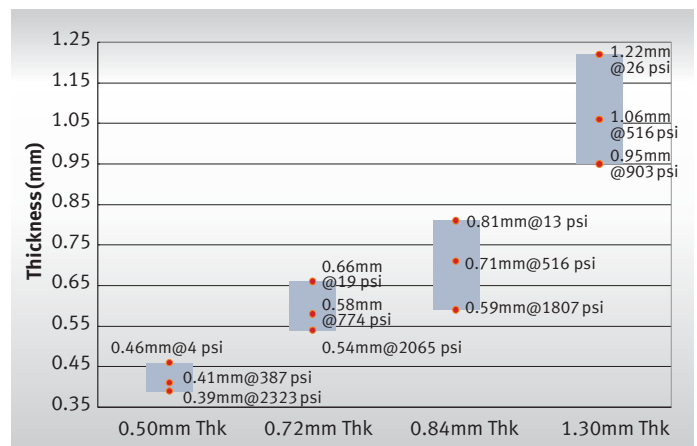

GORE® SMT EMI Gaskets and Grounding Pads — SMT Supersoft Series

The SMT Supersoft Series is highly compressible to ensure consistent electrical performance. These components are conductive on contact and resilient after compression (Table 2). This combination of highly compressible construction and minimal force requirements makes them an excellent choice for use with metallized plastic housings and a variety of components, including LCDs, flexible circuits, antennas, and cameras. In addition, the SMT Supersoft Series protects against harsh conditions like shock and vibration encountered in applications such as handheld scanners. The highly compressible construction also provides consistent contact in housings that have surface variations like those in magnesium as-cast enclosures.

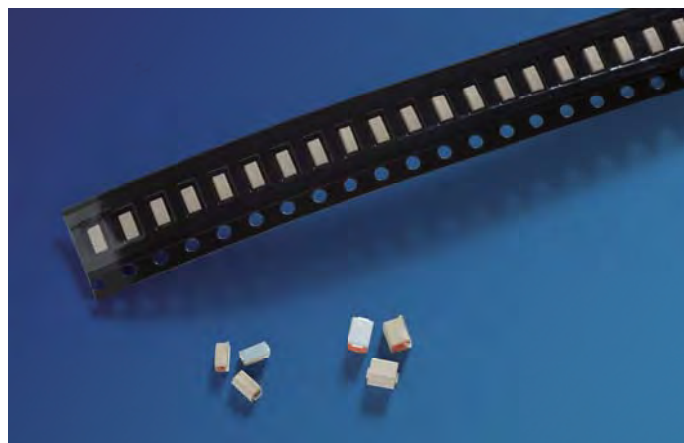


TABLE 2: SMT SUPERSOFT SERIES TYPICAL PERFORMANCE¹

| Gore Part Number | Thickness (mm) | Length (mm) | Width (mm) | Weight (g) | Low Compression | | | Recommended Compression | | | High Compression | | |
|------------------|----------------|-------------|------------|------------|-----------------------------|----------------------|----------------------------------|-----------------------------|----------------------|----------------------------------|-----------------------------|----------------------|----------------------------------|
| | | | | | Compressed Part Height (mm) | DC Resistance (ohms) | Force to Achieve Compression (N) | Compressed Part Height (mm) | DC Resistance (ohms) | Force to Achieve Compression (N) | Compressed Part Height (mm) | DC Resistance (ohms) | Force to Achieve Compression (N) |
| 25SMT-6110-01 | 1.66 | 3.56 | 1.79 | 0.020 | 1.48 | 0.008 | 0.9 | 1.19 | 0.006 | 2.3 | 0.90 | 0.009 | 7.0 |
| 25SMT-6110-03 | 2.42 | 3.58 | 2.57 | 0.037 | 2.20 | 0.012 | 1.8 | 1.90 | 0.011 | 3.6 | 1.60 | 0.011 | 6.2 |

¹Values are for reference only and are not intended for specification purposes.

ACCELERATED LIFE TESTING FOR SMT SUPERSOFT SERIES

A crucial factor in assessing the acceptability of gaskets or grounding pads is their performance over time — performance that can be evaluated only through accelerated life testing. To evaluate durability of the SMT Supersoft Series, industry testing was performed at various conditions (Table 3) with parts soldered to a test board. Figure 3 shows the changes in DC resistance following exposure to the outlined conditions. The minimal amount of change in DC resistance for the SMT Supersoft Series demonstrates consistent and reliable performance in demanding environments.

TABLE 3: IEC TEST STANDARDS FOR ACCELERATED LIFE TESTING (ALT) CONDITIONS

| | International Electromechanical Commission (IEC) Test Standard | IEC Standard No. | Test Conditions |
|---|--|------------------|--|
| 1 | Cold | 60068-2-1 | -65°C, 96 hours |
| 2 | Dry Heat | 60068-2-2 | +85°C, 96 hours |
| 3 | Vibration | 60068-2-6 | Sinusoidal 5 Hz to 100 Hz, 5g max. acceleration, 90 min. on each of the 3 axes |
| 4 | Salt Mist | 60068-2-11 | +35°C, 5 parts by weight NaCl and 95 parts by weight H ₂ O, 24 hours |
| 5 | Change of Temperature | 60068-2-14 | -40°C to +125°C, 30 min. @ extremes, 15 min. @ 25°C, 90 min. per cycle, 25 cycles |
| 6 | Mixed Flowing Gas | 60068-2-60 | Hydrogen sulfide (H ₂ S) @ 100 PPB, sulfur dioxide (SO ₂) @ 500 PPB, 96 hours |
| 7 | Damp Heat | 60068-2-78 | +65°C, 100% humidity, 96 hours |



GORE® SMT EMI Gaskets and Grounding Pads

FIGURE 3: DC RESISTANCE THROUGH ALT FOR 25SMT-6110-01


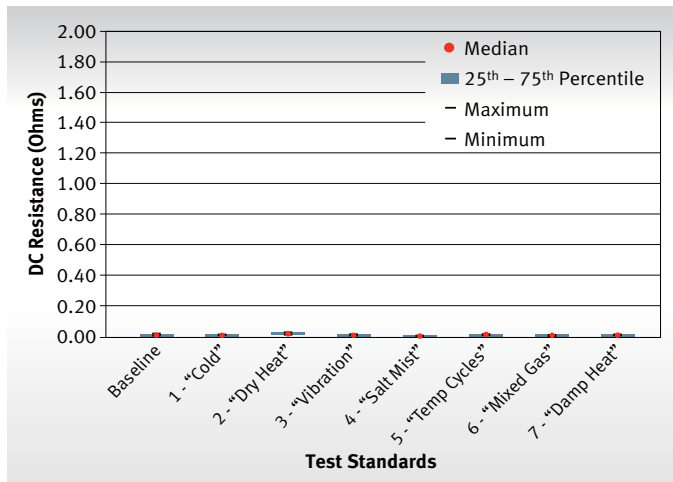



FIGURE 5: FORCE DISPLACEMENT RESISTANCE FOR 25SMT-6110-03

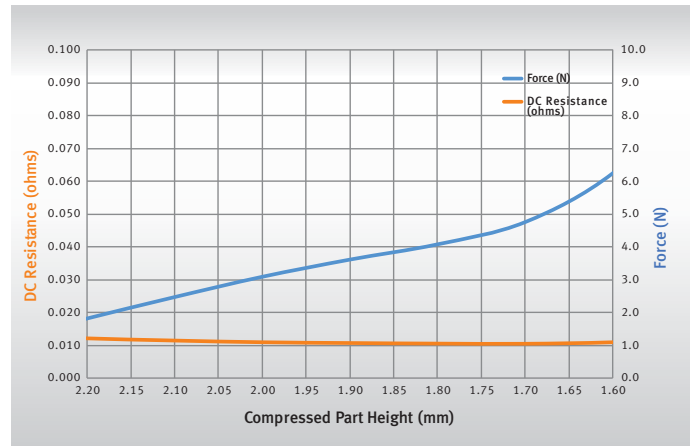

FORCE DISPLACEMENT RESISTANCE OF SMT SUPERSOFT SERIES

The SMT Supersoft Series provides conductivity on contact; however, the amount of force and DC resistance differs for each variant as seen in Table 2 and Figures 4-5.

FIGURE 4: FORCE DISPLACEMENT RESISTANCE FOR 25SMT-6110-01

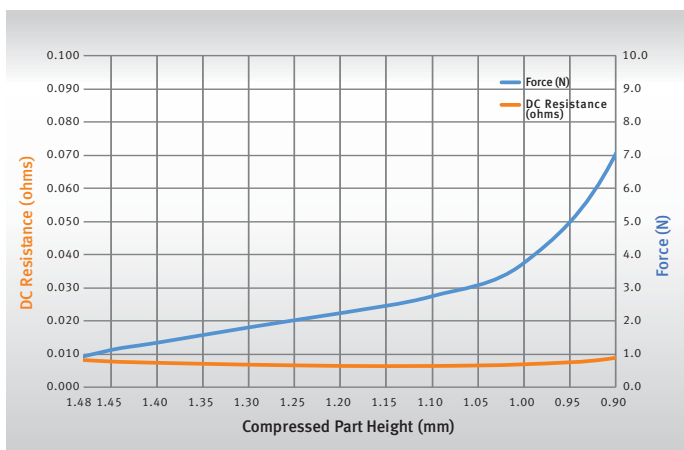

RECOVERABILITY

Recoverability is the inverse of compression set. If a device will be opened for modifications during initial production, hardware upgrades, or field repairs, the shielding materials must be able to rebound and create a consistent connection. Recoverability measures the gasket's ability to maintain some level of gap-filling following a release of a compression load. Using ASTM D395 B, Standard Test Methods for Rubber Property, Test Method B: Compression Set under Constant Deflection in Air, the SMT Supersoft Series has demonstrated recoverability between 96 and 97 percent (Table 4). This high level of recoverability ensures that the electrical path is maintained when compression is removed and then reestablished.

TABLE 4: RECOVERABILITY OF SMT SUPERSOFT SERIES

| Gore Part Number | Recoverability After 22 Hours of Compression | Recoverability After 70 Hours of Compression |
|------------------|--|--|
| 25SMT-6110-01 | 96% | 96% |
| 25SMT-6110-03 | 97% | 97% |

GORE® SMT EMI Gaskets and Grounding Pads — SMT GS5200 Series

The SMT GS5200 Series offers the highest conductivity under compression in Gore's EMI Shielding product line (Table 5). The durability of these components extends their service life in challenging environments such as ruggedized scanners/readers, gaming devices, and wireless infrastructure. These highly conductive components recover easily after compression. Ideal for small footprint applications and for metal housings, the SMT GS5200 Series provides high performance and excellent reliability.

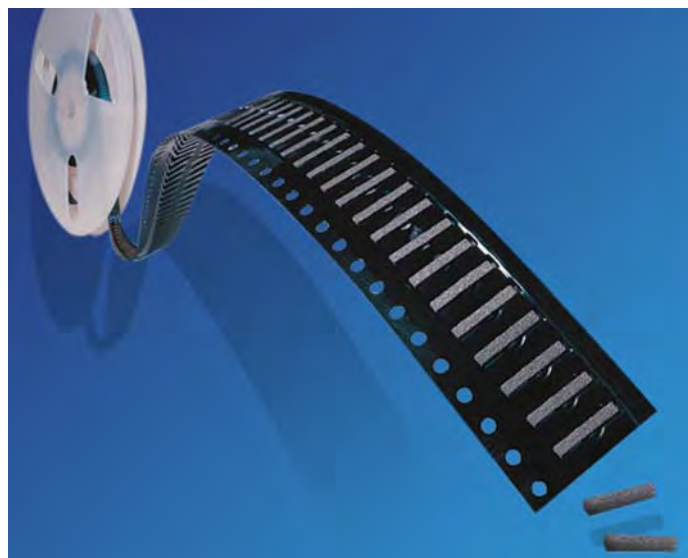


TABLE 5: SMT GS5200 SERIES TYPICAL PERFORMANCE¹

| Gore Part Number | Thickness (mm) | Length (mm) | Width (mm) | Weight (g) | Low Compression | | | Recommended Compression | | | High Compression | | |
|------------------|----------------|-------------|------------|------------|------------------|----------------------|---------------------------------------|-------------------------|----------------------|---------------------------------------|------------------|----------------------|---------------------------------------|
| | | | | | Stop Height (mm) | DC Resistance (ohms) | Pressure to Achieve Compression (psi) | Stop Height (mm) | DC Resistance (ohms) | Pressure to Achieve Compression (psi) | Stop Height (mm) | DC Resistance (ohms) | Pressure to Achieve Compression (psi) |
| 25SMT-3645-21 | 0.50 | 5.50 | 1.10 | 0.0115 | 0.46 | 1.952 | 3.9 | 0.41 | 0.014 | 387.1 | 0.39 | 0.001 | 2,322.5 |
| 25SMT-3645-22 | 0.50 | 8.00 | 1.10 | 0.0160 | 0.46 | 1.952 | 3.9 | 0.41 | 0.014 | 387.1 | 0.39 | 0.001 | 2,322.5 |
| 25SMT-3645-34 | 0.50 | 5.50 | 0.90 | 0.0088 | 0.46 | 1.952 | 3.9 | 0.41 | 0.014 | 387.1 | 0.39 | 0.001 | 2,322.5 |
| 25SMT-3645-9 | 0.72 | 5.50 | 1.25 | 0.0158 | 0.66 | 0.492 | 19.3 | 0.58 | 0.003 | 774.2 | 0.54 | 0.001 | 2,064.5 |
| 25SMT-3645-10 | 0.72 | 8.00 | 1.25 | 0.0230 | 0.66 | 0.492 | 19.3 | 0.58 | 0.003 | 774.2 | 0.54 | 0.001 | 2,064.5 |
| 25SMT-3645-11 | 0.72 | 12.00 | 1.25 | 0.0339 | 0.66 | 0.492 | 19.3 | 0.58 | 0.003 | 774.2 | 0.54 | 0.001 | 2,064.5 |
| 25SMT-3645-17 | 0.72 | 5.50 | 1.10 | 0.0142 | 0.66 | 0.492 | 19.3 | 0.58 | 0.003 | 774.2 | 0.54 | 0.001 | 2,064.5 |
| 25SMT-3645-25 | 0.72 | 12.00 | 2.00 | 0.0500 | 0.66 | 0.492 | 19.3 | 0.58 | 0.003 | 774.2 | 0.54 | 0.001 | 2,064.5 |
| 25SMT-3645-26 | 0.72 | 8.00 | 2.00 | 0.0400 | 0.66 | 0.492 | 19.3 | 0.58 | 0.003 | 774.2 | 0.54 | 0.001 | 2,064.5 |
| 25SMT-3645-27 | 0.72 | 5.50 | 2.00 | 0.0240 | 0.66 | 0.492 | 19.3 | 0.58 | 0.003 | 774.2 | 0.54 | 0.001 | 2,064.5 |
| 25SMT-3645-33 | 0.72 | 3.20 | 1.10 | 0.0078 | 0.66 | 0.492 | 19.3 | 0.58 | 0.003 | 774.2 | 0.54 | 0.001 | 2,064.5 |
| 25SMT-3645-40 | 0.84 | 5.50 | 1.25 | 0.0110 | 0.81 | 1.939 | 12.9 | 0.71 | 0.028 | 516.1 | 0.59 | 0.001 | 1,806.5 |
| 25SMT-3645-41 | 0.84 | 3.20 | 1.25 | 0.0100 | 0.81 | 1.939 | 12.9 | 0.71 | 0.028 | 516.1 | 0.59 | 0.001 | 1,806.5 |
| 25SMT-3645-43 | 1.30 | 3.20 | 3.20 | 0.0370 | 1.22 | 0.322 | 25.8 | 1.06 | 0.003 | 516.1 | 0.95 | 0.001 | 903.2 |
| 25SMT-3645-44 | 1.30 | 8.00 | 2.00 | 0.0580 | 1.22 | 0.322 | 25.8 | 1.06 | 0.003 | 516.1 | 0.95 | 0.001 | 903.2 |

¹ Values are for reference only and are not intended for specification purposes.



GORE® SMT EMI Gaskets and Grounding Pads

ACCELERATED LIFE TESTING FOR SMT GS5200 SERIES

A crucial factor in assessing the acceptability of gaskets or grounding pads is their performance over time — performance that can be evaluated only through accelerated life testing. To evaluate durability of the SMT GS5200 Series, industry testing was performed at various conditions (Table 6) with parts soldered to a test board. Figures 6-9 show the changes in DC resistance following exposure to the outlined conditions. The minimal amount of change in DC resistance for the SMT GS5200 Series demonstrates consistent and reliable performance in demanding environments.

TABLE 6: IEC TEST STANDARDS FOR ACCELERATED LIFE TESTING (ALT) CONDITIONS

| | International Electromechanical Commission (IEC) Test Standard | IEC Standard No. | Test Conditions |
|---|--|------------------|--|
| 1 | Cold | 60068-2-1 | -65°C, 96 hours |
| 2 | Dry Heat | 60068-2-2 | +85°C, 96 hours |
| 3 | Vibration | 60068-2-6 | Sinusoidal 5 Hz to 100 Hz, 5g max. acceleration, 90 min. on each of the 3 axes |
| 4 | Salt Mist | 60068-2-11 | +35°C, 5 parts by weight NaCl and 95 parts by weight H ₂ O, 24 hours |
| 5 | Change of Temperature | 60068-2-14 | -40°C to +125°C, 30 min. @ extremes, 15 min. @ 25°C, 90 min. per cycle, 25 cycles |
| 6 | Mixed Flowing Gas | 60068-2-60 | Hydrogen sulfide (H ₂ S) @ 100 PPB, sulfur dioxide (SO ₂) @ 500 PPB, 96 hours |
| 7 | Damp Heat | 60068-2-78 | +65°C, 100% humidity, 96 hours |

FIGURE 6: DC RESISTANCE THROUGH ALT FOR 0.50 MM SMT GS5200 SERIES PARTS

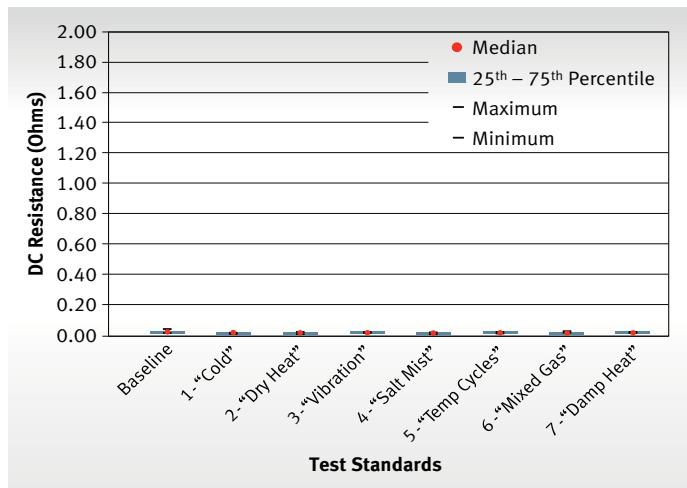


FIGURE 7: DC RESISTANCE THROUGH ALT FOR 0.72 MM SMT GS5200 SERIES PARTS

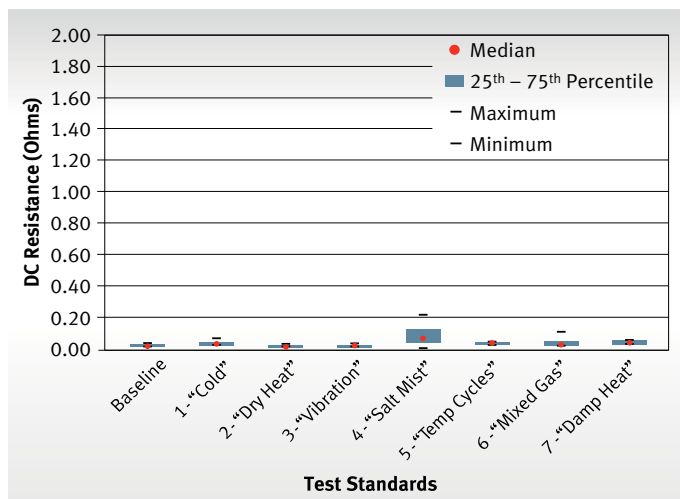


FIGURE 8: DC RESISTANCE THROUGH ALT FOR 0.84 MM SMT GS5200 SERIES PARTS


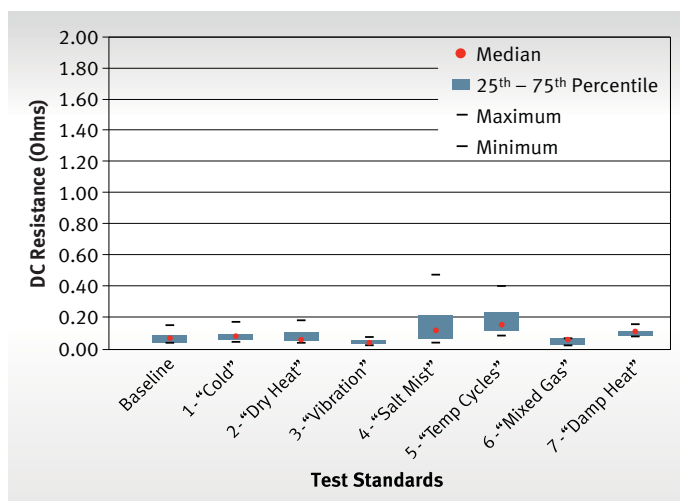


FIGURE 9: DC RESISTANCE THROUGH ALT FOR 1.30 MM SMT GS5200 SERIES PARTS

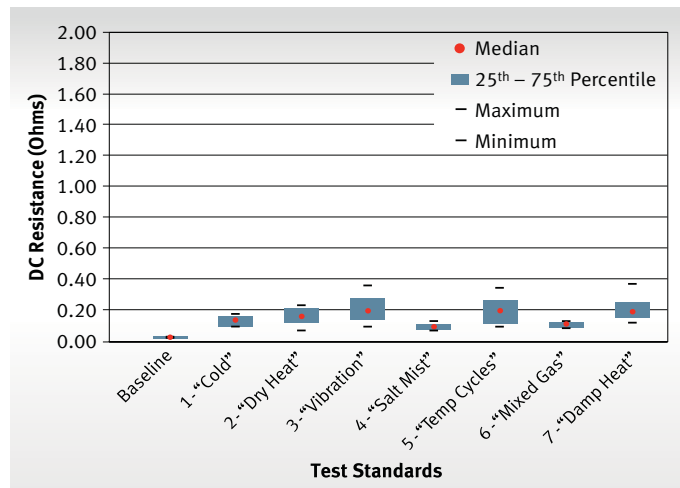

FORCE DISPLACEMENT RESISTANCE OF SMT GS5200 SERIES

The SMT GS5200 Series provides conductivity when compressed approximately ten percent of the initial height; however, the amount of force and DC resistance differs for each variant as seen in Table 7 and Figures 10-13.

FIGURE 10: FORCE DISPLACEMENT RESISTANCE FOR 0.50 MM SMT GS5200 SERIES PARTS

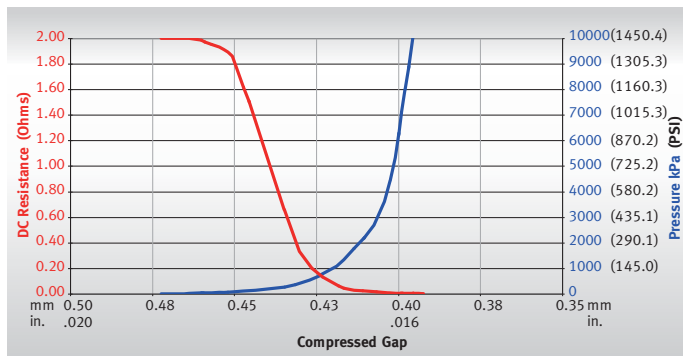


FIGURE 11: FORCE DISPLACEMENT RESISTANCE FOR 0.72 MM SMT GS5200 SERIES PARTS

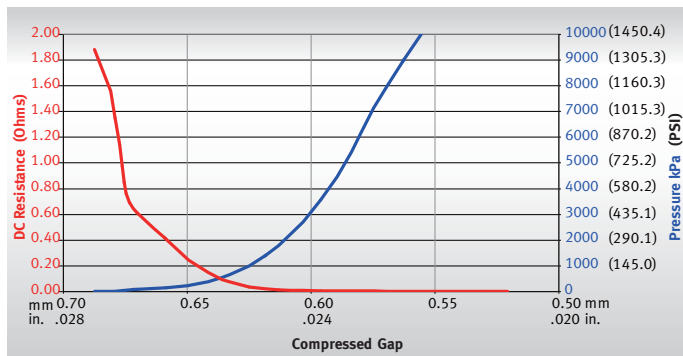


FIGURE 12: FORCE DISPLACEMENT RESISTANCE FOR 0.84 MM SMT GS5200 SERIES PARTS


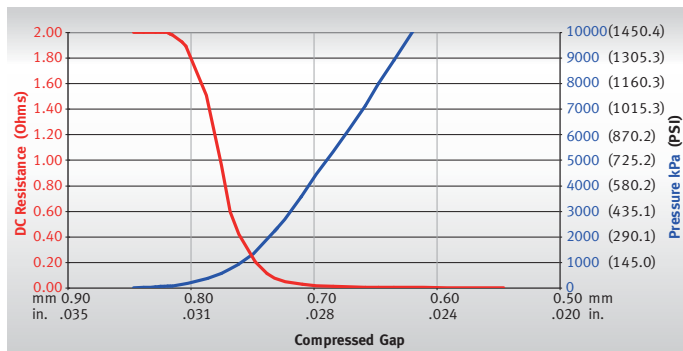


FIGURE 13: FORCE DISPLACEMENT RESISTANCE FOR 1.30 MM SMT GS5200 SERIES PARTS

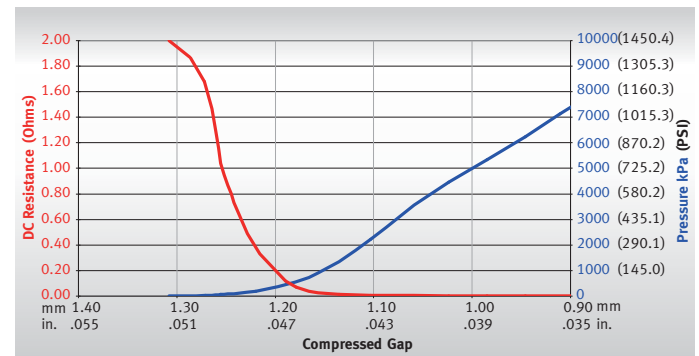

RECOVERABILITY

Recoverability is the inverse of compression set. If a device will be opened for modifications during initial production, hardware upgrades, or field repairs, the shielding materials must be able to rebound and create a consistent connection. Recoverability measures the gasket's ability to maintain some level of gap-filling following a release of a compression load. Using ASTM D395 B, Standard Test Methods for Rubber Property, Test Method B: Compression Set under Constant Deflection in Air, the SMT GS5200 Series has demonstrated recoverability between 84 and 92 percent (Table 7). This high level of recoverability ensures that the electrical path is maintained when compression is removed and then reestablished.

TABLE 7: RECOVERABILITY OF SMT GS5200 SERIES

| Gore Part Thickness (mm) | Recoverability After 22 Hours of Compression | Recoverability After 70 Hours of Compression |
|--------------------------|--|--|
| 0.50 | 88.4% | 88.5% |
| 0.72 | 91.0% | 92.2% |
| 0.84 | 91.9% | 87.8% |
| 1.30 | 84.2% | 86.0% |



GORE® SMT EMI Gaskets and Grounding Pads

ORDERING INFORMATION FOR GORE® SMT EMI GASKETS AND GROUNDING PADS

GORE® SMT EMI Gaskets and Grounding Pads are available in standard sizes of lengths, widths, and thickness. For assistance in selecting the right components for your application, please contact Gore sales.

GORE® SMT EMI Gaskets and Grounding Pads are covered by patent No. US 6,255,581 B1 and US 6,210,789 B1. Corresponding foreign patents issued.

GORE® SMT EMI Gaskets and Grounding Pads - SMT Supersoft Series is covered by patent No. US 6,255,581 B1 and US 7,129,421 B2. Corresponding foreign patents issued.

NOTICE — USE RESTRICTIONS APPLY
Not for use in food, drug, cosmetic or medical device manufacturing, processing, or packaging operations.

W. L. Gore & Associates, Inc.

gore.com/emi

GORE and designs are trademarks of W. L. Gore & Associates ©2016 W. L. Gore & Associates, Inc. MAT-0257-R6-DAT-US-SEP16



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [EMI Gaskets, Sheets, Absorbers & Shielding](#) *category:*

Click to view products by [Gore](#) *manufacturer:*

Other Similar products are found below :

[8101010140](#) [8563-0090-89](#) [1194-7.7X10](#) [1245-34"X18YD](#) [1267](#) [1345-3/8x18yrd](#) [1554907-1](#) [2320002000](#) [2320014700](#) [SG293037DS](#)
[ST005PCN50](#) [55005107](#) [38M4040AA0606](#) [46J5N02020.NN00](#) [1125-8X10](#) [1126X1"](#) [1170-3/4X18YDS](#) [1170-7.7x10](#) [1183-12"X18YD](#) [6-](#)
[34T-BD-0.315](#) [SG125187D-24](#) [SG125250R-24](#) [SG187375R-24](#) [SG284050DS](#) [8402010540](#) [KIT TECH CLIP](#) [10-40450-28S](#) [1245](#) [1267-](#)
[1/2"x18yd](#) [46J8501020.NN00](#) [1170-1/4"x18yd](#) [AL-36FR-1x54.5](#) [3013310A](#) [1194X1"](#) [3020604](#) [3021302](#) [3031313](#) [260709](#) [3021310](#) [6-](#)
[34UT-070-BD-16](#) [303076048](#) [46J5N03020.NN00](#) [30206025](#) [30395641](#) [3030403](#) [3690103020](#) [HNY-LT15CU4241](#) [46X7503020.NN00](#)
[46W5E02520.NN00](#) [302095032](#)