

# GP Batteries

## DATA SHEET



### NO MERCURY ADDED

|                                  |   |
|----------------------------------|---|
| <b>Description</b>               | Mercury & Cadmium Free Alkaline Manganese Battery, 9V   |
| <b>Chemical System</b>           | Alkaline Manganese  |
| <b>Nominal Voltage</b>           | 9.0 Volts   |
| <b>Nominal Dimensions</b>        | Refer to drawing  |
| <b>Terminals</b>                 | Protruded positive (+) and flat negative (-) contacts   |
| <b>Jacket</b>                    | Foil jacket   |
| <b>Applications</b>              | All electronic devices, e.g. transistor radios, cassette recorders, toys, alarm clocks, lighting & torches, portable fans |
| <b>Ambient Temperature Range</b> | Operation: -18°C ~ 50°C<br>Recommended: 10°C ~ 25°C<br>Storage: Not exceed 30°C   |
| <b>Shelf Life</b>                | 5 years   |
| <b>Approx. Weight</b>            | 47g   |

### Cross References:

| GP     | JIS               | IEC               | Eveready | Duracell |
|--------|-------------------|-------------------|----------|----------|
| 1604AU | 6LP3146/<br>6LR61 | 6LP3146/<br>6LR61 | 522      | MN1604   |

### Discharge curve:

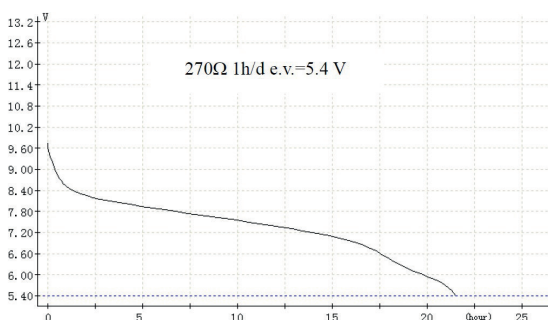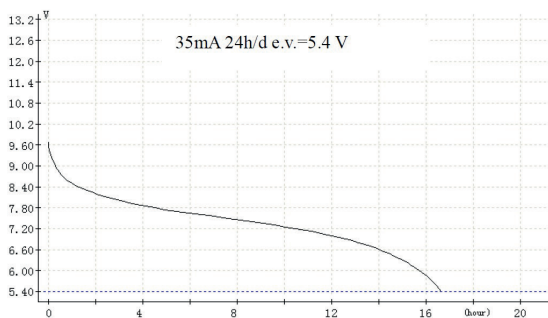


#### Remarks

- 1) Store period before test shall be under 20±2°C, RH 55±20% within 30 days of manufacture.
- 2) Batteries shall not leak during the service life test before the end voltage reached.



Model No.: GP1604AU

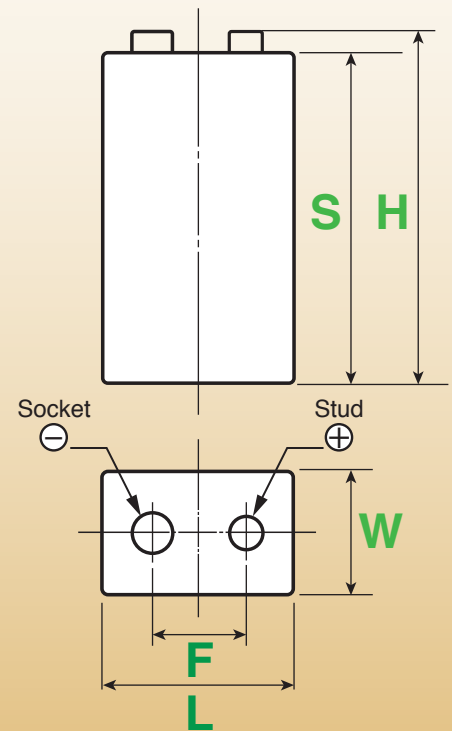

| / | min   | max   |
|---|-------|-------|
| H | 46.5  | 48.5  |
| S | 43.7  | 44.7  |
| F | 12.45 | 12.95 |
| L | 25.3  | 26.1  |
| W | 16.3  | 17.1  |

Dimension : mm

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.

[www.gpbatteries.com](http://www.gpbatteries.com)

Manufacturer reserves the right to alter or amend the design, model and specification without prior notice.  
Copyright© GPI International Ltd. - All rights reserved

Member  
Gold Peak Technology Group

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Cylindrical Battery Contacts, Clips, Holders & Springs](#) category:*

*Click to view products by [GP Batteries](#) manufacturer:*

Other Similar products are found below :

[12BH36A-GR](#) [200](#) [161](#) [183](#) [270](#) [QX3506](#) [5220](#) [5230](#) [1055](#) [1088](#) [5250](#) [KT0008](#) [1119](#) [5207](#) [246](#) [BWCD-L4.5W2.0H2.3](#) [BWCD-L6.0W2.0H2.0](#) [BW0041BG-L2.5W1.0H1.5](#) [BW0031AG-L3.5W1.0H3.0](#) [BWCD-L5.0W2.0H2.5](#) [BW0019CG-L3.5W1.5H4.3](#) [BW0036AG-L3.5W1.0H1.4](#) [BW0034AG-L3.5W0.9H1.5](#) [BW0033BG-L3.4W0.9H2.0](#) [BW0041CG-L2.5W1.0H1.8](#) [BW0028AG-L3.5W1.5H2.05](#) [BW0098DG-L4.0W1.5H2.0](#) [BW0019BG-L3.5W1.5H3.8](#) [BWCD-L6.5W2.0H2.0](#) [BWCD-L4.0W2.0H1.0](#) [BWCD-L5.5W2.0H3.0](#) [BW0019AG-L3.5W1.5H3.5](#) [BWCD-L3W2.0H1.0](#) [ECT818002831](#) [ECT81800A081](#) [ECT818003141](#) [ECT81800B009](#) [ECT818002399](#) [F9-7-6-0.4Z](#) [F8-10-0.4-1.3](#) [F10-10-6-0.4-1.3](#) [F8-8-5-0.4Z](#) [F10-12-0.4-1.3](#) [F10-10-6.5-0.4P](#) [F10-10-6.5-0.4 Z](#) [GP SUPER 14A \(LR14\) SHRINK 2 LR20 INDUSTRIAL INTENSE](#) [CW332](#) [HC4](#) [PCL5A](#)