


GP Batteries

Data Sheet


Model No.: GP392

Description : Silver Oxide High Drain Button Cell
 Nominal Voltage : 1.55 Volts
 Nominal Dimensions : Ø7.90 X 3.60mm
 Applications : Watch (with alarm and lamp),
 calculator, hearing aid,
 melody card etc.
 Average Weight : 0.7g
 Shelf Life : Not less than 90% of the
 service capacity, following
 1st year storage at 20°C.
 Date Code : Unless otherwise specified,
 each cell will carry a numeric
 year code and an alphabetical
 month code.
 Nominal Service Life : 550 hrs (at 20kΩ Load)
 (to 1.2V at 20°C) 115 days (at 100kΩ Load)

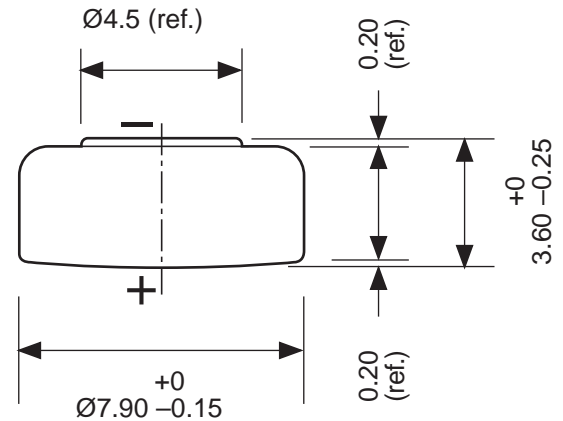

Unit : mm

Typical Discharge Characteristics at 20°C

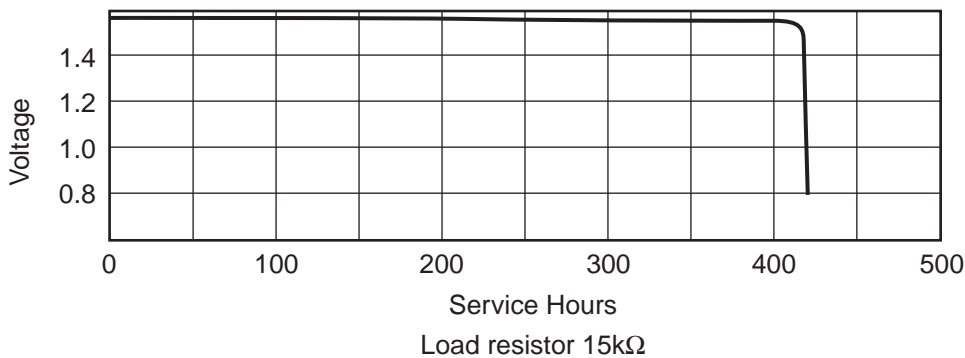

Average Service Capacity:
 42 mAh (rated capacity at 15kΩ load,
 cut off voltage 1.2V at 20°C)

Close circuit voltage:
 1.30 Volts (min.) (load resistor 100Ω at
 20°C for 1 to 2 seconds)

Cross Reference:

IEC	JIS	EVEREADY	VARTA	DURACELL	PANASONIC	SONY
SR41	SR41	392	V392	D392	SP392	SR41SW

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Cylindrical Battery Contacts, Clips, Holders & Springs](#) category:

Click to view products by [GP Batteries](#) manufacturer:

Other Similar products are found below :

[753-00001](#) [12BH36A-GR](#) [200](#) [183](#) [270](#) [QX3506](#) [5220](#) [5230](#) [1055](#) [1088](#) [5250](#) [166](#) [591](#) [1044](#) [KT0008](#) [1119](#) [254TR](#) [5207](#) [1121](#) [246](#)
[4027003022001-PK](#) [12BHC186P2-GR](#) [9V \(6LR61\)](#) [PX1604](#) [GP24E](#) [OKY3399-1](#) [PCM-F04S40 DALY](#) [5000394132023](#) [PCM-F04S30](#)
[DALY](#) [PCM-F08S40 DALY](#) [PCM-F08S60 DALY](#) [PCM-L13S20 DALY](#) [1012](#) [1020](#) [1023](#) [1024](#) [1075](#) [1077](#) [1080](#) [1090](#) [1095](#) [1096](#) [1097](#)
[1098](#) [1109](#) [1126](#) [1127](#) [1128](#) [1162](#) [1173](#) [147](#)