

GP Batteries

Data Sheet


Model No.: GP476A

Description : Alkaline High Voltage Battery
 Chemical System : Alkaline Manganese Dioxide
 Nominal Voltage : 6 Volts
 Nominal Dimensions : $\text{Ø}13.0 \text{ mm} \times 25.2 \text{ mm}$
 Terminal : Nickel plated flat contacts - protruded
 red (+); protruded black (-)
 Jacket : Metal jacket
 Internal Connection : Pressure
 Applications : Electronic toy, photo
 Nominal Weight : 10g
 Nominal Capacity : 105 mAh (to 3.6 Volts), rated at 6k Ω
 load, at 20°C
 Date Code : Every inner cell will carry a numeric
 year code and an alphabetical month code
 Shelf Life : Not less than 90% of the service life,
 for 1 year storage at 20°C.
 Insulation Resistance: 5 M Ω min.
 Close Circuit Voltage: 5.2 Volts (min.) (load resistor 400 Ω at
 20°C for 1 to 2 seconds)

Average Service Life :


Discharge Resistance	Discharge Condition	End Point Voltage	Service Life
6k Ω	24 Hrs/ Day	3.6 V	125 Hrs

Typical Discharge Characteristics at 20°C :

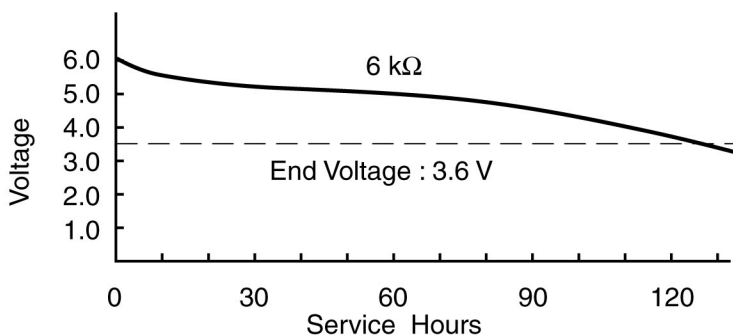

Cross References:

GP	Duracell	Eveready	IEC	JIS	Varta
476A	PX28A	A544	4LR44	4LR44	V4034PX

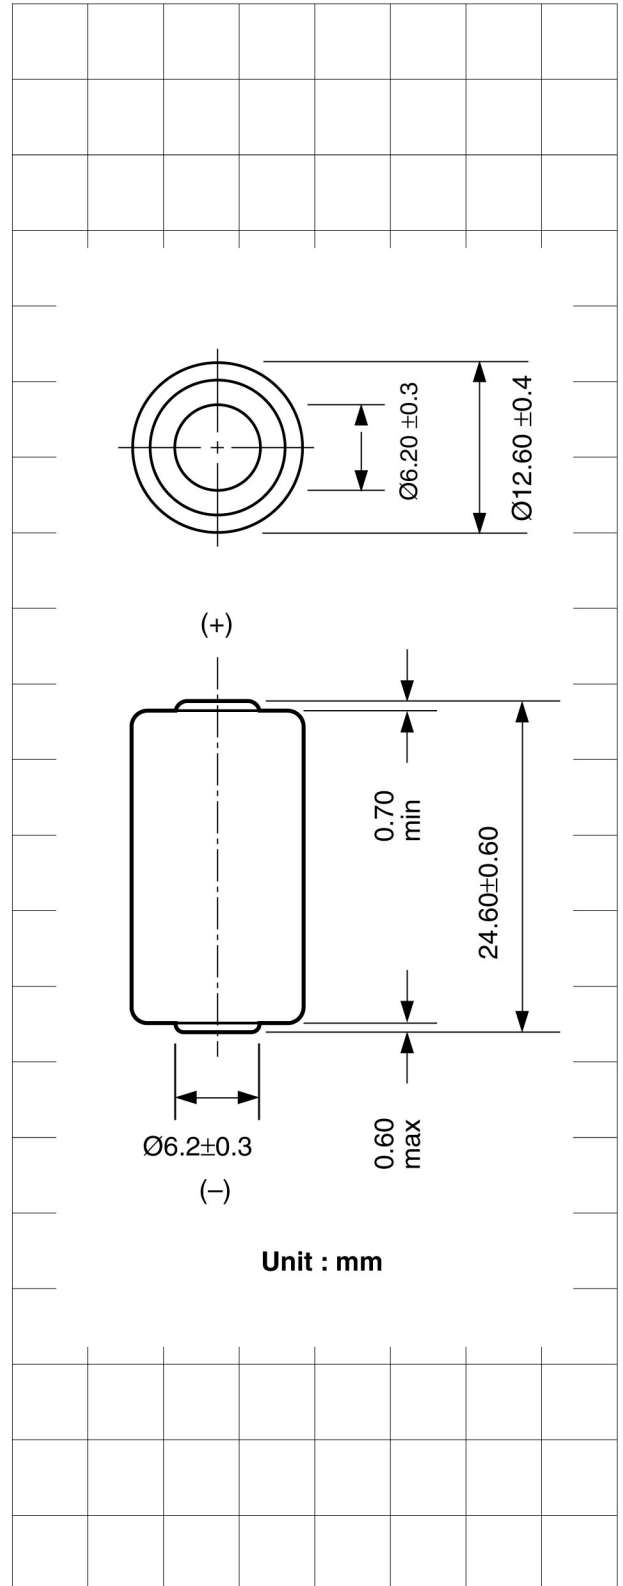

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Control Switches](#) category:

Click to view products by [GP Batteries](#) manufacturer:

Other Similar products are found below :

[80887-99](#) [80932-99](#) [86855-00](#) [88814-30](#) [1424293-1](#) [HW4S-2TC10](#) [89721-12](#) [89804-08](#) [SSN](#) [RL01801](#) [ASD2L20N-LVO](#) [50051857-17](#)
[50099156-001-05](#) [51.155R-15200](#) [50058920-26](#) [CP-FA51](#) [CP-FA49](#) [ACCU-SC/L-3000](#) [PP9M](#) [PP87G](#) [PP86GA](#) [PP71G](#) [PP70G](#) [PP6G](#)
[PP62G](#) [PP58BL](#) [PP56G](#) [PP86GB](#) [PP77GA](#) [PP76G](#) [PP4M](#) [PP47G](#) [PP46G](#) [PP41M](#) [PP40G](#) [PP32G](#) [RD-20](#) [PP23M](#) [PP12G](#) [PORTAPRO](#)
[POM-2708](#) [PNB-2005](#) [3057.0012](#) [CV-075](#) [CV-140SB](#) [CV-150](#) [CV-150S](#) [214X20XK](#) [CV-180](#) [CV-200MB](#)