
GP Batteries

Data Sheet

Description	: Silver Oxide Low Drain Button Cell					
Nominal Voltage	: 1.55Volts					
Nominal Dimensions	: Ø6.80mm×2.60mm					
Application	:Analog watch					
Average Weight	: 0.40g					
Date Code	: Unless otherwise specified, each cell					
	Will carry a numeric year code and an					
	alphabetical month code.					
Shelf Life	: Not less than 90% of the service					
	capacity within first year. , not less					
	than 85% of the service capacity with					
	third year storage at 22 \pm 3 $^{\circ}$ C					
	40-80 %RH.					
Close Circuit Voltage	: 1.25 Volts (min.)(load resistor 200Ω					
	at 22 \pm 3 °C for 0.1 to 2 seconds)					
Nominal Service Life	: 800hrs (at 50kΩ load)					
(to 1.2V at 22 ± 3 °C)	200days (at 300kΩ load)					
Average Service Capacity : 25mAh(at 50kΩ load)						
(to 1.2V at 22 ± 3 °C)						


Typical Discharge characteristics at 22 ± 3°C



Cross References:

IEC	JIS	Eveready Varta Duracell	Panasonic	Sony	
-----	-----	-------------------------	-----------	------	--

SR66	SR626W	377	V377	D377	SP377	SR626SW

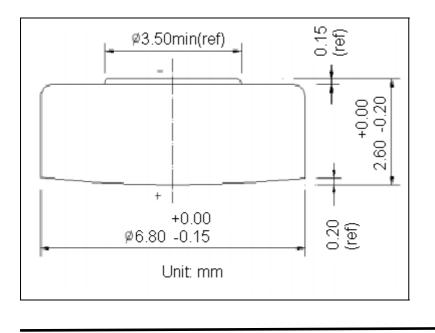

* The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Control Switches category:

Click to view products by GP Batteries manufacturer:

Other Similar products are found below :

80887-99 80932-99 86855-00 88814-30 1424293-1 HW4S-2TC10 89721-12 89804-08 SSN RL01801 ASD2L20N-LVO 50051857-17 50099156-001-05 51.155R-15200 50058920-26 CP-FA51 CP-FA49 ACCU-SC/L-3000 PP9M PP87G PP86GA PP71G PP70G PP6G PP62G PP58BL PP56G PP86GB PP77GA PP76G PP4M PP47G PP46G PP41M PP40G PP32G RD-20 PP23M PP12G PORTAPRO POM-2708 PNB-2005 3057.0012 CV-075 CV-140SB CV-150 CV-150S 214X20XK CV-180 CV-200MB