


**I2C-TRN™ Dual Bidirectional I²C Voltage-Level Translator
User Manual**

GRAVITECH.US

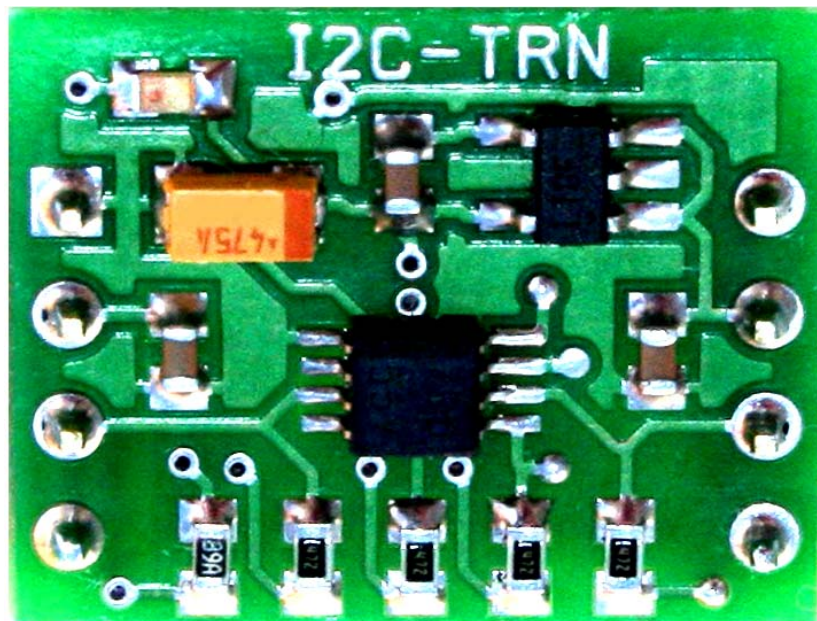

uResearch

GRAVITECH GROUP

Copyright © 2007 MicroResearch
GRAVITECH GROUP WWW.GRAVITECH.US

I2C-TRN™ Dual Bidirectional I²C Voltage-Level Translator User Manual

Description

The I2C-TRN board is an 8-pin CMOS device that translates voltage level. It allows bidirectional voltage translation between 1.2V and 5V, without the use of a direction pin. The low ON-state resistance of the switch allows connections to be made with minimal propagation delay. There are no external components required. This makes it perfect for embedded systems that require voltage translation between the master and slave.

This I2C-TRN designed ready for 5V to 3.3V translator. It allows 5V system to communicate to 3.3V device without having external 3.3V supply.

This board features innovations that set it apart from other voltage-level translator module. Innovations feature like on-board pull-up resistors, power LED and 3.3 V regulator, which make it ready for 5V to 3.3V translator. **It can also use to power up external devices for up to 90mA.** The module can be quickly connected directly on to the breadboard. The board is small and compact in size 0.70 x 0.57 inches.

The I2C-TRN is designed base on PCA9306 IC. This dual bidirectional I²C voltage-level translator, with an enable (EN) input, is operational from 1.2-V to 3.3-V V_{REF1} and 1.8-V to 5.5-V V_{REF2} . When EN is high, the translator switch is ON, and the SCL1 and SDA1 I/O are connected to the SCL2 and SDA2 I/O, respectively, allowing bidirectional data flow between ports. When EN is low, the translator switch is off, and a high-impedance state exists between ports.

Features

- Stand alone module, no external components required
- On-board 3.3 voltage regulator, pull-up resistors and power LED
- 2-Bit bidirectional translator for SDA and SCL lines in mixed-mode I²C applications
- Less than 4.5-ns maximum propagation delay to accommodate standard-mode and fast-mode I²C devices
- Allows voltage-level translator between
 - ✓ 1.2V V_{REF1} and 1.8V, 2.5V, 3.3V, or 5V V_{REF2}
 - ✓ 1.8V V_{REF1} and 2.5V, 3.3V, or 5V V_{REF2}
 - ✓ 2.5V V_{REF1} and 3.3V, or 5V V_{REF2}
 - ✓ 3.3V V_{REF1} and 5V V_{REF2}
- Provide bidirectional voltage translation with no direction pin
- Open-drain I²C I/O ports provides less signal distortion
- Design easy for breadboard
- High quality double sided PCB
- Small and compact in size 0.70 x 0.57 inches
- Dual row 0.6" width, 0.1" pitch header pins


Applications

- Voltage-level translation for I²C bus

* I²C is a trademark of Philips Semiconductors Corporation.

I2C-TRN™ Dual Bidirectional I²C Voltage-Level Translator User Manual

Pin Configuration

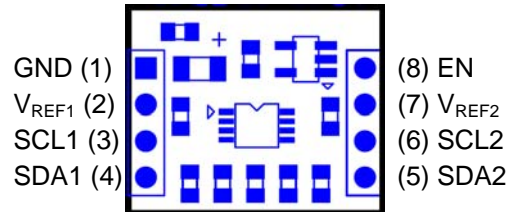

Pin No.	Name	Type	Description
1	GND	PWR	Supply ground
2	V_{REF1}	PWR	Low-voltage-side reference supply voltage for SCL1 and SDA1
3	SCL1	I/O	Serial clock line, low-voltage side
4	SDA1	I/O	Serial data line, low-voltage side
5	SDA2	I/O	Serial data line, high-voltage side
6	SCL2	I/O	Serial clock line, high-voltage side
7	V_{REF2}	PWR	High-voltage-side reference supply voltage for SCL1 and SDA1
8	EN	Input	Switch enable input

Interfaces

Power:

For 5.0V to 3.3V translation:

- Power the I2C-TRN board with 5V supply on V_{REF2} pin.
- Solder a bridge on “3V3” at the bottom of the module (default from manufacture).



- 3.3V is available on V_{REF2} pin. It can be use to power external devices up to 90mA.

For other level translation:


- Remove solder bridge “3V3” at the bottom of the module.
- Apply high-voltage-side reference supply to V_{REF2} and low-voltage-side reference to V_{REF1}

I2C-TRN™ Dual Bidirectional I²C Voltage-Level Translator User Manual

Module Configuration

I²C pull-up resistors:

I²C bus specification required to have pull-up resistors on SDA and SCL pin. I2C-TRN comes with these two pull-up resistors on both sides (total of 4 resistors) enabled from the manufacture. It can be disabling when connect to I²C bus that already have pull-up resistors by remove the solder bridge on the “PU1” for low-side, and “PU2” for high-side at the bottom of the module.

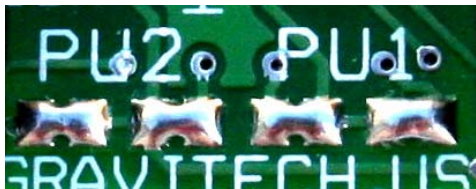

EN pin:

When EN is high, the translator switch is ON, and the SCL1 and SDA1 I/O are connected to the SCL2 and SDA2 I/O, respectively, allowing bidirectional data flow between ports. When EN is low, the translator switch is off, and a high-impedance state exists between ports.

To always enable the translation, solder a bridge on “EN” at the bottom of the module (default from manufacture). To use external signal to control enable line simply remove the solder bridge and connect enable signal to EN pin8.




Power-on LED:

The green LED on the module is illuminating when the power applied. The power-on LED is enabled from the manufacture. It can be disabling for light sensitive or low current requirement application by remove the solder bridge on “PW” at the bottom of the module.



Below is the default setting from the manufacture.

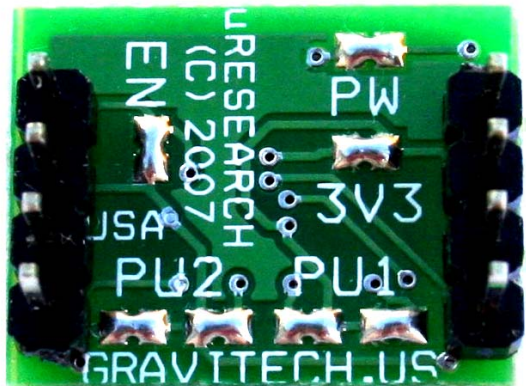

I2C-TRN™ Dual Bidirectional I²C Voltage-Level Translator User Manual



uResearch

© 2007 Copyright, All Rights Reserved



uResearch

© 2007 Copyright, All Rights Reserved



uResearch

© 2007 Copyright, All Rights Reserved

Copyright © 2007 MicroResearch
GRAVITECH GROUP WWW.GRAVITECH.US

I2C-TRN™ Dual Bidirectional I²C Voltage-Level Translator User Manual

Notes

Contact Us

We maintain a website where you can get information on our products, obtain literature and download support files. Visit us online at:

WWW.GRAVITECH.US

Use our online Forum or e-mail your technical support questions to support@gravitech.us. We try to respond to your questions the same day.

For sales questions or to place and order, direct your e-mails to sales@gravitech.us. Refer to our website for product pricing, shipping rates, payment instructions, and for other info we need to complete your order.

Disclaimer: MicroResearch reserves the right to modify its products or literature, or to discontinue any product at any time without prior notice. The customer is responsible for determining the suitability of any device for any application developed using MicroResearch components.

Copyright © 2007 MicroResearch
GRAVITECH GROUP WWW.GRAVITECH.US

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Daughter Cards & OEM Boards](#) category:

Click to view products by [Gravitech](#) manufacturer:

Other Similar products are found below :

[ADZS-21262-1-EZEXT](#) [27911](#) [MPC5777C-416DS](#) [KITMPC5744DBEVM](#) [SPC56ELADPT144S](#) [TMDXRM46CNCD](#) [DM160216](#) [EV-ADUCM350GPIOTHZ](#) [EV-ADUCM350-BIO3Z](#) [ATSTK521](#) [1130](#) [MA160015](#) [MA240013](#) [MA240026](#) [MA320014](#) [MA330014](#) [MA330017](#) [TMDSCNCD28054MISO](#) [MIKROE-2152](#) [MIKROE-2154](#) [MIKROE-2381](#) [TSSOP20EV](#) [MIKROE-1108](#) [MIKROE-1516](#) [SPS-READER-GEVK](#) [AC244049](#) [AC244050](#) [AC320004-3](#) [2077](#) [ATSMARTCARD-XPRO](#) [EIC - Q600 -230](#) [ATZB-212B-XPRO](#) [SPC560PADPT100S](#) [SPC560BADPT64S](#) [MA180018](#) [EIC - Q600 -220](#) [AC164134-1](#) [BOB-12035](#) [BB-BONE-BATT-01](#) [STM8/128-D/RAIS](#) [AC164127-6](#) [AC164127-4](#) [AC164134-3](#) [AC164156](#) [MA320021](#) [MA320024](#) [DFR0285](#) [DFR0312](#) [DFR0356](#) [MA320023](#)