<u>Grayhill</u>


SERIES 23 SPST, 1/4 Amp

FEATURES

- Momentary Contact
- 100,000 Cycles of Operation



DIMENSIONS in inches (and millimeters)

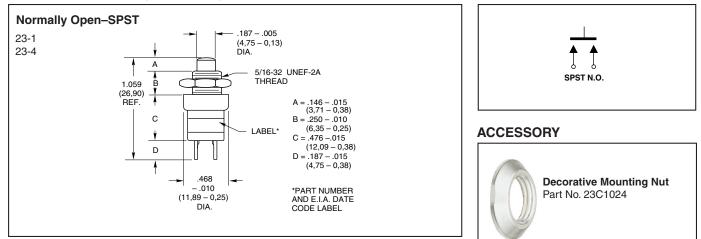

SPECIFICATIONS Rating Criteria

Rated: To-Make-and-Break: 1/4 Amp at 115 Vac, or 1/8 Amp at 220 Vac resistive. Contact Resistance: 25 milliohms maximum on a new switch.

Voltage Breakdown: 1,000 Vac between mutually insulated parts. Insulation Resistance: 1,000 megohms

minimum.

Materials and Finishes

Mounting Nut and Cover Bushing: Brass, tin zinc Base: Phenolic per MIL-M-14, Type CFG. Button: Polycarbonate Terminals: Brass, silver-plated. Spring: Tinned music wire Shorting Bar: Phosphor bronze, silver-plated. Operating Temperature: -40° to +85°C

Operating Features

Total Button Travel: $.095 \pm .010 (2,41 \pm 0,25)$ Overtravel: .005 (0,13) minimum Actuating Force: 16 ± 4 ounces Mounting Hole: $21/64^{"}$ (8,33)

ORDERING INFORMATION

CIRCUITRY

Description & Button Color	Part No.
SPST, N.O., Red	23-1
SPST, N.O., Black	23-4
Accessory Nut	23C1024-1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Pushbutton Switches category:

Click to view products by Grayhill manufacturer:

Other Similar products are found below :

 8940K2012
 LW1L-M1C10V-A
 LW1L-M1C70-A
 LW2L-A1C20M-GD
 LW2L-M1C20M-A
 60324L
 M22-D-R-GB0/K11
 M7E-HRN2

 67021K512
 67081K512X
 701PB580
 7199K101
 810K12910
 810KSV30B
 MML21EA2ADK
 MML21KA3ABK
 MML23KA3AC05K-001

 MML23KW3AA01W
 8418K2
 8442K3
 8450K1
 860K11911T01A
 861901
 861K11911T01A07
 861K13810T00A14
 861K13911

 8646AB6X718UL
 8646ABUL
 9001KXRK
 907AYY100
 PMHD155A1
 9533CD4+U574+U4922
 95-414.000
 99-450.837
 99-453.837

 PV3H2B0NN-341
 1203MRA
 A22NZBGANGA
 A22NZBNANGA
 A22NZMPATRA
 A2PMA1X03EC56
 A3A-5123-02
 A3A-7140
 A3A-7340

 7310
 A3A-7340
 A3U-TMW-A2C-5M
 A595
 12037A2ULCSA
 ABD122N-B
 1211390004