


SERIES 23
SPST, 1/4 Amp

FEATURES


- Momentary Contact
- 100,000 Cycles of Operation



DIMENSIONS in inches (and millimeters)

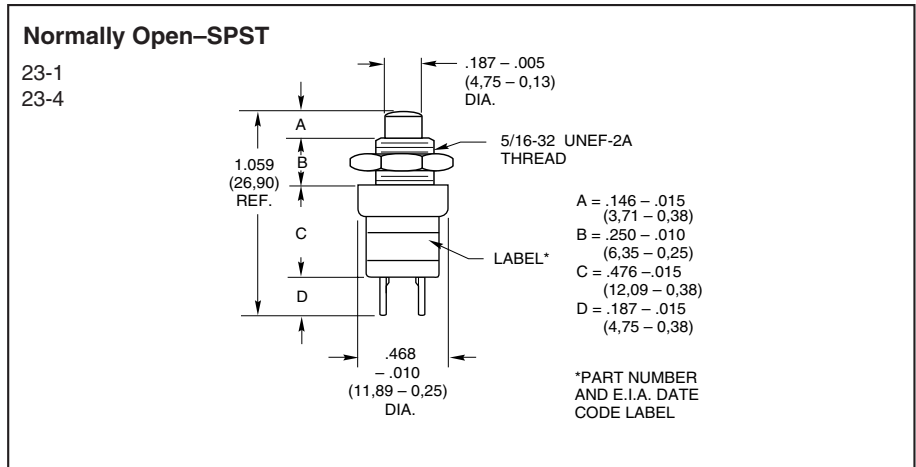

CIRCUITRY

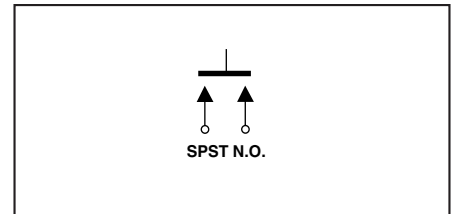

ACCESSORY



SPECIFICATIONS

Rating Criteria

Rated: To-Make-and-Break: 1/4 Amp at 115 Vac, or 1/8 Amp at 220 Vac resistive.

Contact Resistance: 25 milliohms maximum on a new switch.

Voltage Breakdown: 1,000 Vac between mutually insulated parts.

Insulation Resistance: 1,000 megohms minimum.

Materials and Finishes

Mounting Nut and Cover Bushing: Brass, tin zinc

Base: Phenolic per MIL-M-14, Type CFG.

Button: Polycarbonate

Terminals: Brass, silver-plated.

Spring: Tinned music wire

Shorting Bar: Phosphor bronze, silver-plated.

Operating Temperature: -40° to +85°C

Operating Features

Total Button Travel: .095 ± .010 (2,41 ± 0,25)

Overtravel: .005 (0,13) minimum

Actuating Force: 16 ± 4 ounces

Mounting Hole: 21/64" (8,33)

ORDERING INFORMATION

Description & Button Color	Part No.
SPST, N.O., Red	23-1
SPST, N.O., Black	23-4
Accessory Nut	23C1024-1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Switch Fixings](#) category:

Click to view products by [Grayhill](#) manufacturer:

Other Similar products are found below :

[893102000](#) [00-5150](#) [LZZ1A](#) [0098.9234](#) [61-9451.0](#) [M2PA-5011](#) [630155](#) [635401](#) [6PA113](#) [6PA147-E6](#) [6PA148-E6](#) [6PA32](#) [6PA9](#) [700109](#)
[700303A56](#) [700C1GRY](#) [700C2GRN](#) [704-6001](#) [704.960.4](#) [704.960.9](#) [704.965.2](#) [704.965.6](#) [704.966.0](#) [7089-3](#) [710082-B11](#) [71M1048](#)
[757200264](#) [764300000](#) [MHU35](#) [MHU37](#) [807039-1](#) [825.003.011](#) [825.005.011](#) [825.053.011](#) [825.055.011](#) [826.000.071](#) [827.020.011](#)
[827.400.021](#) [835.900.023](#) [MML52C10C](#) [MML52E10C](#) [MML92HGH](#) [MML93K](#) [84211M02CNNS](#) [84212M02CNNS](#) [84217A8.0LNOS](#)
[842.500.011](#) [843.000.011](#) [843187-000](#) [843487-000](#)