

## SERIES 67A Hall Effect Joystick

### FEATURES



- Proportional output
- Shaft and panel seal to IP67
- Compact: 1-inch square flange
- Long operational life
- RoHS compliant

### APPLICATIONS

- Medical
- Military vehicles and devices
- Mobile electronics for outdoor use



### DIMENSIONS in inches (and millimeters)

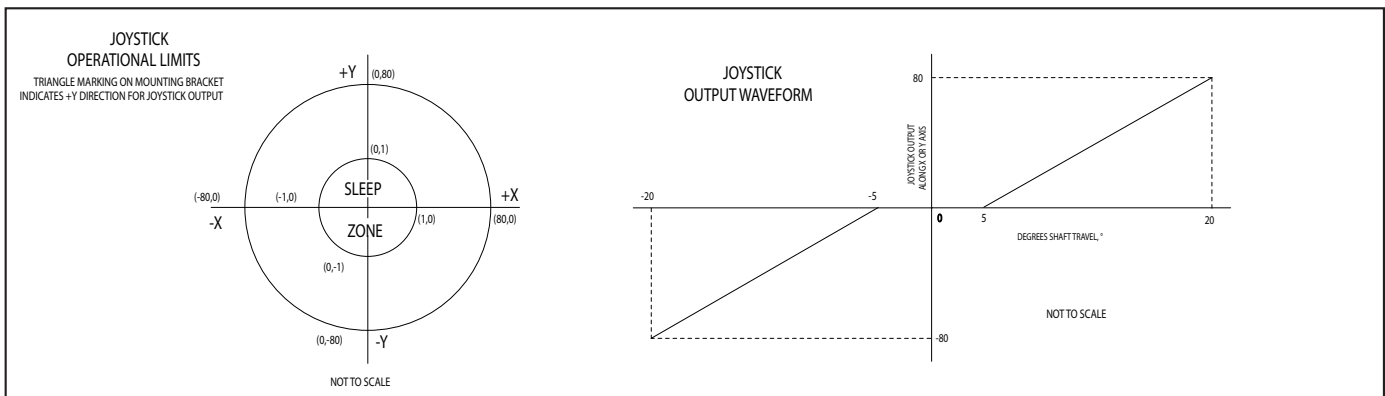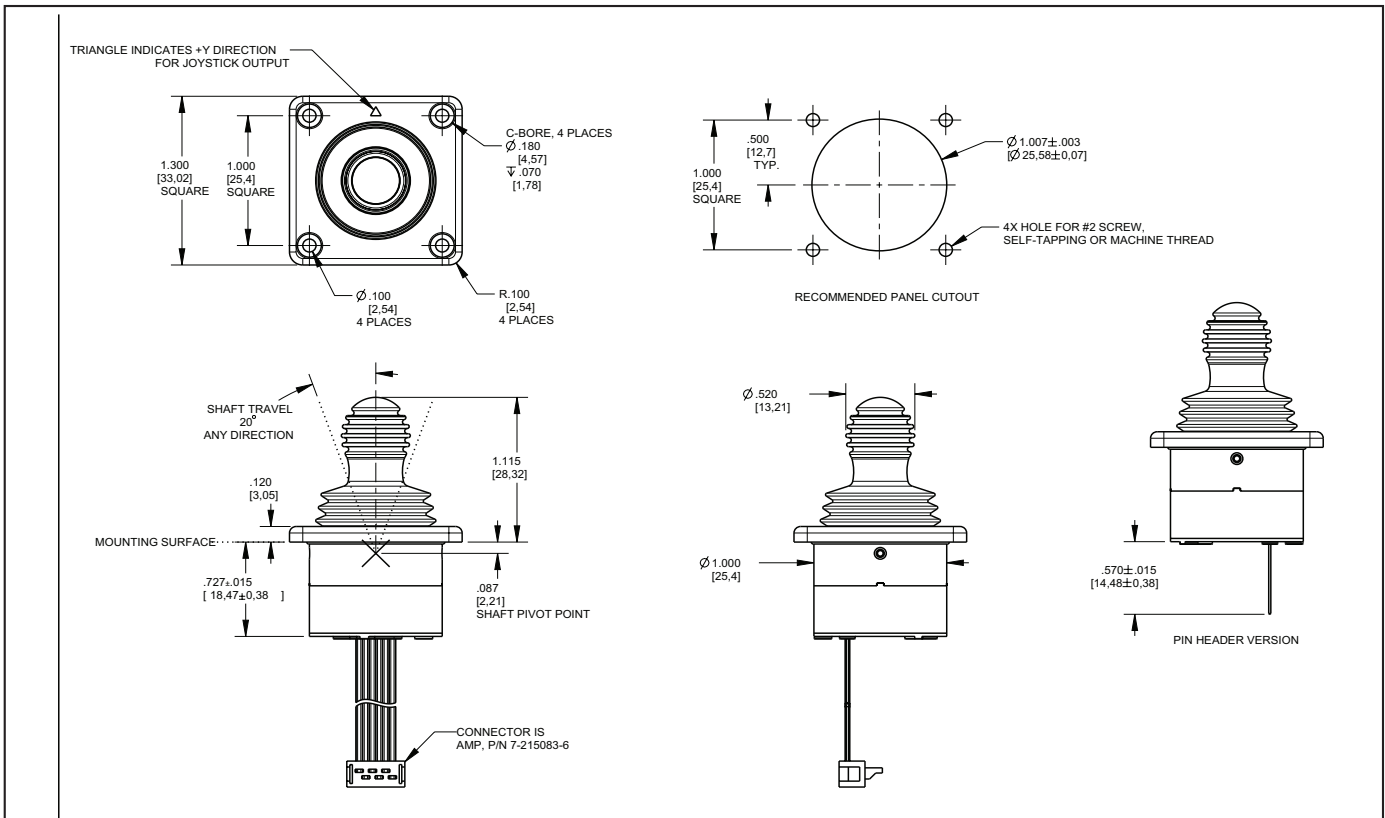

Joysticks

**SPECIFICATIONS**

**Electrical Ratings**

**Supply Voltage (VVD):** 3.3V ± 0.3V  
**High Level Input Voltage (VIH, Min):** 0.7\*VDD on SCL & SDA / 0.25\*VDD+0.8 on AIn  
**Low Level Input Voltage (VIL, Max):** 0.3\*VDD on SCL & SDA / 0.15\*VDD on AIn  
**Current Draw In Active Mode (IDD1):** 3mA Maximum @ VDD = 3.3V  
**Current Draw In Sleep Mode (IDD2):** 100uA Maximum @ VDD = 3.3V  
**Maximum Current Sunk By Any I/O Pin:** 25mA  
**Leakage Current:** ±5 nA Typ., ±125 nA Max  
**Low Level Output Voltage (VOL):** 0.6V On INTn & SDA @ IOL = 6mA, @ VDD = 3.3V  
**Measurement Frequency (Active Mode):** 50 Samples/Sec  
**Response Time, Active Mode (T1):** 20ms\*  
**Response Time, Sleep Mode (T2):** 80ms\*  
**Output @ Maximum Joystick Deflection (XMax, YMax):** 80 Units  
**Output With Joystick Shaft Released (Center Position):** (0,0)  
**Nominal Startup Time (TP, W):** 300ms, Max

**Physical & Mechanical Ratings**

**Vibration:** Random, Tested per MIL-STD-810G, Method 514.6, Procedure I  
**Mechanical Shock:** Tested per MIL-STD 202, Method 213B Test Condition A  
**Transit Drop:** Tested per MIL-ST-810G, Method 516.6, Procedure II  
**Terminal Strength:** 10 lbs. Minimum, Tested per MIL-STD-202, Method 211A  
**Push-Out Force:** 60 lbs. Minimum  
**Pull-Out Force:** 60 lbs. Minimum  
**Shaft Impact:** 0.5 lbs. Weight dropped 20x from height of 1m  
**Shaft Side-Load:** 45 lbs. Minimum  
**Mounting Torque:** 3-5 in-lbs recommended, 8 in-lbs. Maximum  
**Joystick Life:** 1 million cycles minimum\*\*

**Environmental Ratings**

**Seal:** IP67, Tested per IEC 60529  
**Altitude:** Tested per MIL-STD 202, Method 105C  
**Thermal Shock:** Tested per MIL-STD 202, Method 107G  
**Operating High Temperature:** +85°C, Tested per IEC 68-2-14, Test Na  
**Operating Low Temperature:** -40°C, Tested per IEC 68-2-14, Test Na

**Storage High Temperature:** +100°C, Tested per IEC 68-2-2, Method Ba

**Storage Low Temperature:** -55°C, Tested per IEC 68-2-1, Method Aa

**Humidity:** Tested per MIL-STD 202, Method 103B

**Humidity, 85/85:** Tested per MIL-STD 202, Method 103B, 500 hours

**Solar Radiation:** Tested per MIL-STD 810G, Method 505.5, Procedure II

**Chemical Resistance:** Tested per ISO 16750-5

**Dielectric:** Tested per MIL-STD 202G, Method 301

**Insulation Resistance:** Tested per MIL-STD 202G, Method 302

**EMC Ratings**

**Radiated Immunity:** Tested per IEC 61000-4-3

**Conducted Immunity:** Tested per IEC 61000-4-6

**Radiated Emissions:** Tested per ANSI C63.4


**Conducted Emissions:** Tested per EN 55022

**Electrostatic Discharge:** Tested per IEC 61000-4-2

**Power Frequency Magnetic Field:** Tested per IEC 61000-4-8




**Block Diagram**

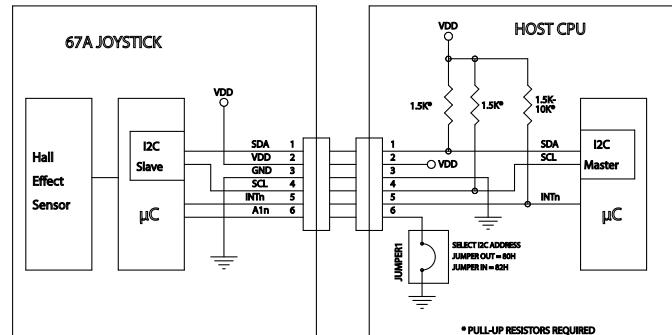

\*Response time is the time from joystick movement to when new X,Y position data is available.

\*\*One cycle is defined as a complete revolution of the shaft around the fixed perimeter, or one actuation in each of the 4 main directions, with return to center between each actuation.

**ORDERING INFORMATION**

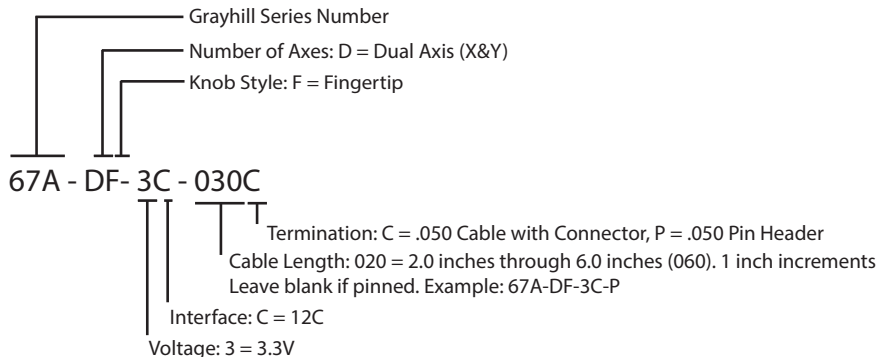

For prices and custom configurations, contact a local sales office, an authorized distributor, or Grayhill's sales department.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Joysticks](#) category:*

*Click to view products by [Grayhill](#) manufacturer:*

Other Similar products are found below :

[M11L0A1](#) [C10O0C1P](#) [JOY-THUMB](#) [S10L0A1M](#) [G3-A1AM151NNNN](#) [TH500P00D4](#) [C10O0C1PMJ0](#) [S10L061J](#) [60C22-M7-4-020S](#) [67A-DF-3C-060C](#) [60A00-8-050C](#) [60A00-4-050C](#) [60C22-M7-4-040S](#) [G3-0425](#) [S30L081F50](#) [3440SAT6476](#) [60A18-4-090C](#) [S30L081J](#)  
[M11L001C](#) [M11L0X1P](#) [USBM31Q081RMJ4S](#) [USBC20O051JMJS](#) [TW08BLK12](#) [HRS202B1](#) [S30L0M1CSJBLK](#) [HF11R11](#) [HG-44MIS000-2654](#) [HG-44MIS000-U-2655](#) [4P182F1E55475](#) [TS4A1S00A](#) [BD140D01GR0000](#) [BD150SD4BL1200](#) [3140SAL6475](#) [TW01BLK11](#)  
[TW01GRY1](#) [ZD4PA203](#) [HF44S10UMJ0](#) [TS3N2S00A](#) [TS1R1U00A](#) [TS1R1S09A](#) [TS1D2S00A](#) [TS1D1U02A](#) [HFX45S02](#) [HFX10S00](#)  
[HF11P11](#) [4R28-2S1E-55-00](#) [BD150A01RE0000](#) [ZD4PA24](#) [ZD4PA22](#) [ZD4PA12](#)