


**SERIES 78C**  
Right Angle Option

**FEATURES**


- Easy Access
- SPST Circuitry
- 2-10 and 12 positions available
- Sealed versions available

**APPLICATIONS**

Telecommunications, computers and peripherals, instruments and controls.



**Series 78C DIMENSIONS** In inches (and millimeters)

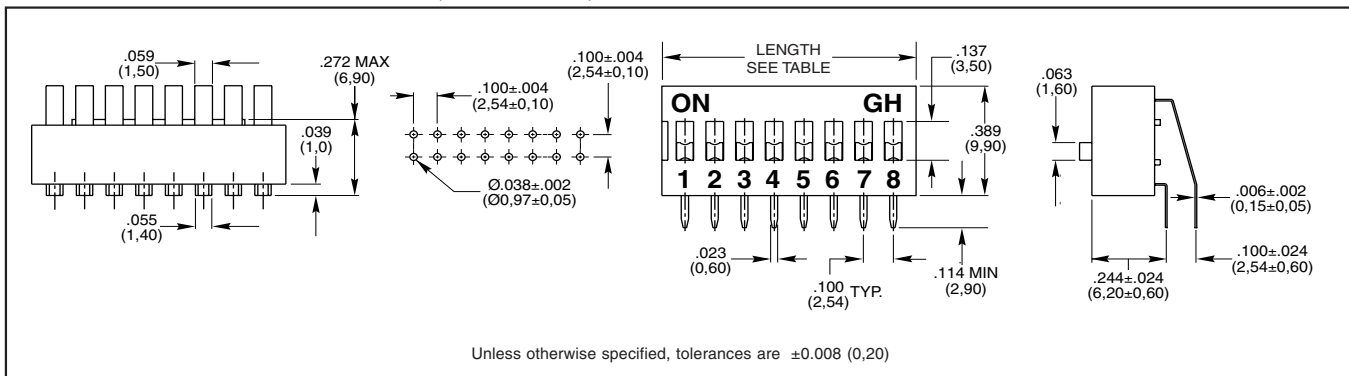

DIP Switches

**SPECIFICATIONS**

**Mechanical**

- Mechanical Life:** 2000 operations per switch.
- Operation Force:** 1000gf max.
- Stroke:** 2.0mm
- Operation Temp:** -20°C to 70°C
- Storage Temp:** -40°C to 85°C
- Vibration Test:** MIL-STD-202F METHOD 201A.
- Frequency: 10-55-10Hz/1 min.
- Directions: X,Y,Z, three mutually perpendicular directions.
- Time: 2 hours each direction.
- High reliability.
- Shock Test:** MIL-STD-202F METHOD 213 B. CONDITION A.
- Gravity: 50G (peak value), 11 msec.
- Direction and times: 6 sides and 3 Times in each direction.
- High reliability.


**Electrical**

- Electrical Life:** 2000 operations per switch
- 24VDC, 25mA.
- Non-Switching Rating:** 100mA, 50VDC.
- Switching rating:** 25mA, 24VDC.
- Contact Resistance:** 50mΩ max. at initial.
- Insulation Resistance:** (at 500VDC) 100mΩ min.
- Dielectric Strength:** 500VAC/1 minute.
- Capacitance:** 5pF max.
- Circuit: Single pole single throw.

**Soldering and Cleaning Process**

- For best results follow these recommendations: Keep switch contacts in "OFF" position for all operations.
- Wave Soldering:** Recommended solder temperature: 500°F (260°C) max 5 seconds.
- Hand Soldering:** Use a soldering iron of 30 Watts or less, controlled at 608°F (320°C) approximately 2 seconds while applying solder.
- Cleaning:** Tape sealed versions withstand cleaning processes.


**CIRCUITRY**

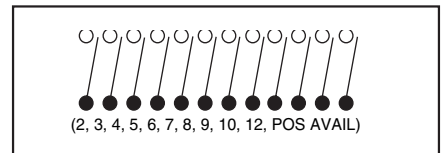

**Materials**

- Base Contact:** Phospher bronze with gold plating over nickel
- Terminals:** Brass with gold plating over nickel
- Nonconductive Parts:** Plastic UL94V-0
- Potting Material:** Epoxy
- Tape Seal:** Polyester film.

**ORDERING INFORMATION**

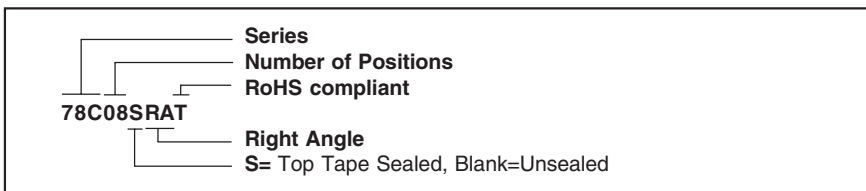

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [grayhill](#) manufacturer:*

Other Similar products are found below :

[44MY29243](#) [46-01-05-500-07](#) [61SY2027](#) [56A30-01-1-04N](#) [56A36-01-1-06N](#) [56P30-01-4-03N](#) [57M22-04-1-13N](#) [57M22-09A16N](#) [60A18-4-040C](#) [60A18-4-040S](#) [60AR18-8-060C](#) [61A16-060](#) [61A16-100](#) [61RS256](#) [M3786/13-0034](#) [M3786/20-026](#) [M3786/35-024](#) [M3786/36-0562](#) [M3786/4-0005](#) [M3786/4-0353](#) [M3786/4-0652](#) [M3786/4-3003](#) [M3786/4-3042](#) [M3786/4-3267](#) [M3786/4-5338](#) [M3786/4-5386](#) [M3786/4-5877](#) [M3786/4-6145](#) [62A11-02-020C](#) [62A15-02-040C](#) [62A22-01-040S](#) [62C1111-01-060S](#) [62C2211-01-060C](#) [62C2211-02-060C](#) [62H2222-H9-P](#) [62HS22-H9-040S](#) [62HS22-H9-050S](#) [62HS22-H9-P](#) [62M15-M2-040CH](#) [62S22-H9-030C](#) [62S22-M9-030C](#) [62T22-L0-040C](#) [62T22-L7-040C](#) [63KS100](#) [63R100](#) [70G-OAC5-L](#) [70G-ODC5MA](#) [70L-OAC-L](#) [70LRCK16-48WP](#) [71AD30-03-1-AJN](#)