
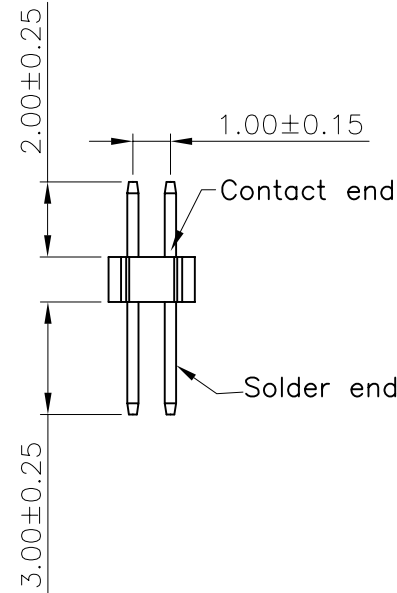
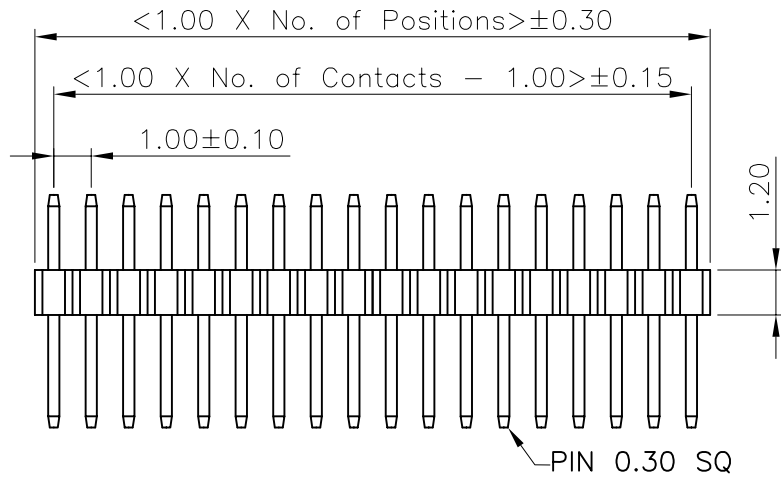


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	INITIAL RELEASE.	2010.06.15	馮代勇
02	△	變更新料號	2010.11.30	黃明霞




Specifications

Current Rating: 1Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 300VAC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C


Materials

Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 LCP or Equivalent Material.
 All materials must meet Greenconn requirement for environment protection

Ordering Information

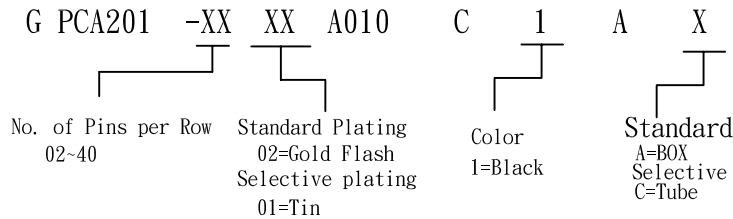

RECOMMENDED P.C.B LAYOUT (Tolerance: ±0.05)

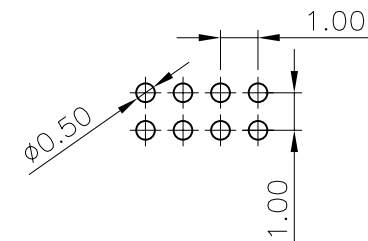

格稜股份有限公司
 Greenconn Corporation

GENERAL TOLERANCE	
X* ± 5*	X. ± 0.30
.X* ± 2*	.X ± 0.20
.XX* ± 1*	.XX ± 0.15
.XXX* ± 0.5*	.XXX ± 0.10

DESIGN: 黃明霞	DATE: 2010.11.30
CHECKED: 李新華	DATE: 2010.11.30
AUDITED: LEAR	DATE: 2010.11.30
APPROVED: LINK	DATE: 2010.11.30

DWG. NO. △ GPCA201-CA10CA
PART NO. GPCA201-XX XX A010C1AX

TITLE. 1.00 PIN HEADER DUAL ROWS DIP TYPE BASE 1.20H

REV. 02	UNIT. mm	SCALE. 1:1	PAGE. 1/1	⊕
---------	----------	------------	-----------	---

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [GREENCONN](#) manufacturer:

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [009176003701906](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#)
[65781-018](#) [65781-047](#) [65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#)
[M90C108951C](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-](#)
[3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#)
[803-43-024-10-001000](#)