
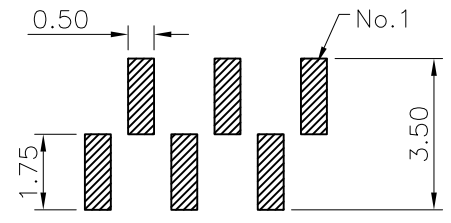




REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	INITIAL RELEASE.	2010.06.15	馮代勇
02	△	變更新圖號	2010.12.08	黃明霞

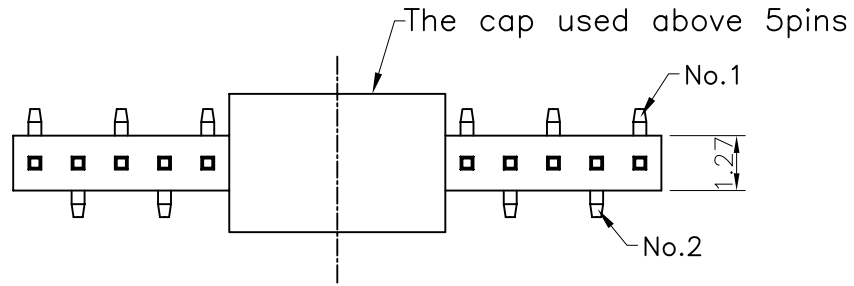

RECOMMENDED P.C.B LAYOUT
(Tolerance:±0.05)

Specifications
 Current Rating: 1.0Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 300V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester UL94V-0
 LCP Or Equivalent material
 All materials must meet Greenconn requirement for environment protection.

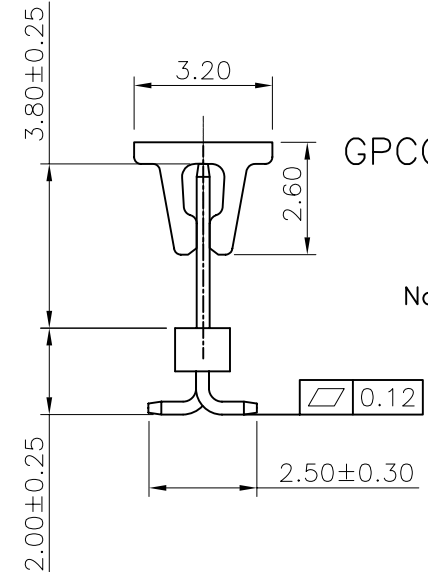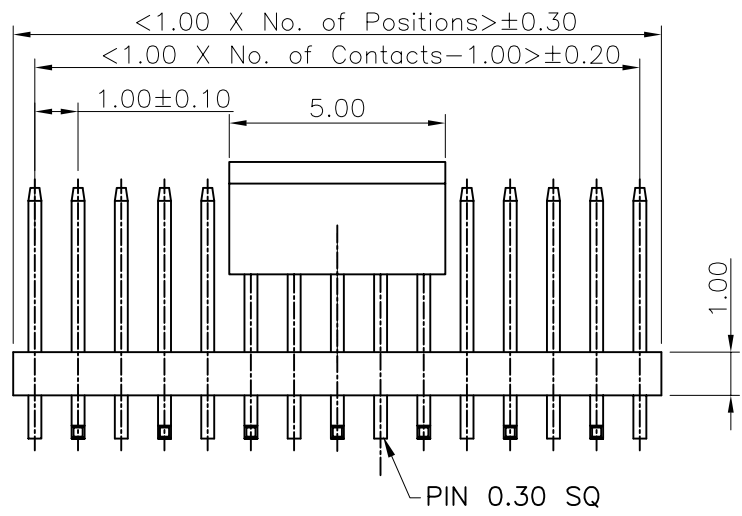

Ordering Information

GPCC101 - XX XX A005 C 1 A X

No. of Pins per Row: 02~40
 Standard Plating: 02=Gold Flash, Selective plating: 01=Tin
 Standard: A=Box, Selective: C=Tube, D=Tape & Reel

格菱股份有限公司
Greenconn Corporation

GENERAL TOLERANCE	
X. ± 5.0°	X. ± 0.30
.X ± 3.0°	.X ± 0.25
.XX ± 2.0°	.XX ± 0.15
.XXX ± 1.0°	.XXX ± 0.10

DESIGN: 黃明霞	DATE: 2010.12.08
CHECKED: 李新華	DATE: 2010.12.08
AUDITED: LEAR	DATE: 2010.12.08
APPROVED: LINK	DATE: 2010.12.08

DWG. NO. △ GPCC101-CA5CA
PART NO. GPCC101-XXXXA005C1AX

TITLE:
 1.00 PIN HEADER
 SINGLE ROW SMT TYPE
 CONNECTOR

REV.	UNIT.	SCALE.	PAGE.	⊕
02	mm	6:1	1/1	⊕

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [GREENCONN](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)