
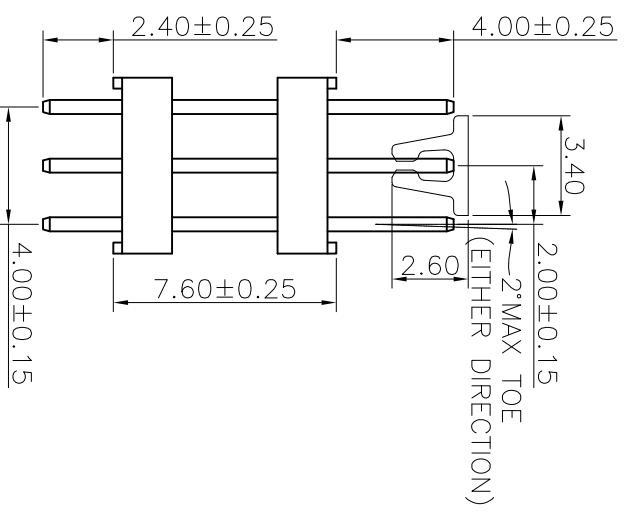
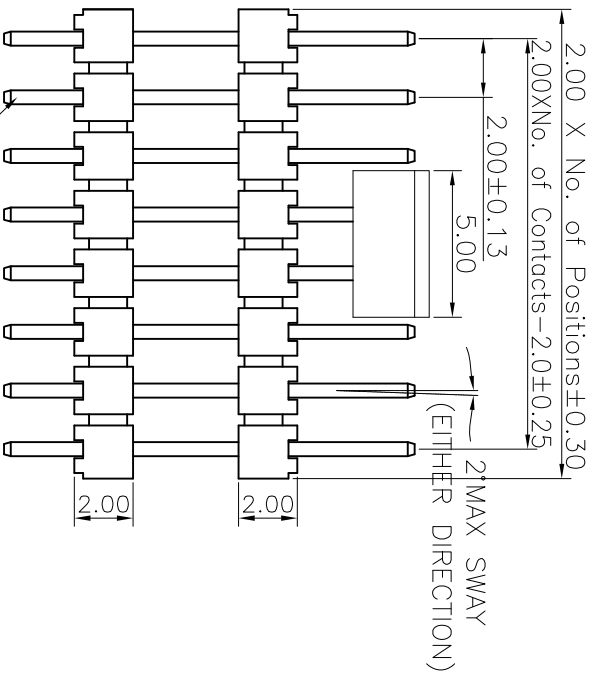


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	INITIAL RELEASE.	2011.03.28	蒙華明

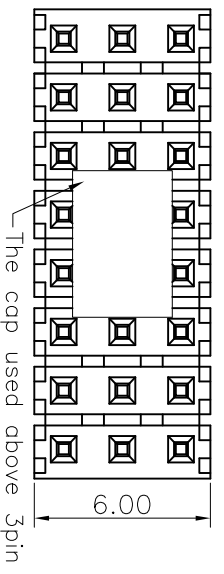

Specifications
 Current Rating: 2Amp
 Insulation Resistance: 1000MΩ/Min.
 Dielectric Withstanding Voltage: 500VAC
 Contact Resistance: 20mΩ/Max.
 Operating Temperature: -40°C to +105°C
 Materials
 Contact Material: Phosphor Bronze
 High Temperature Thermoplastic, UL 94V-0
 LCP or Equivalent Material
 All materials must meet Greconn requirement for environment protection.


Ordering Information

G PFA305 - XX XX A 001 C 1 A X


No. of Pins per Row: 02~30
 Standard Plating: 02=Gold Flash, Selective Plating: 01=Tin, 05=Gold Flash/Tin

Color: 1=Black
 Standard Packing: A=Box, Selective Packing: C=Tube, E=CAP+Tube, F=CAP+Tape&Reel

Recommended P.C.Board Layout
 (Tolerance: ±0.05)

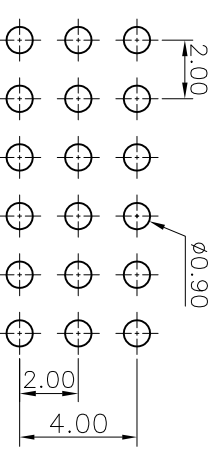

格菱股份有限公司 Greconn Corporation		GENERAL TOLERANCE X. ±5.0° X. ±3.0° .XX ±2.0° .XXX ±1.0°		DESIGN: 蒙華明 CHECKED: 劉北平 AUDITED: 李輝 APPROVED: cc_li		DWG. NO. GPFA305-CA1CA PART NO. GPFA305-XXXX A001C1AX		TITLE: 2.00 PIN HEADER THREE ROWS DIP TYPE CONNECTOR	
REV. 01	UNIT. mm	SCALE. 4:1	PAGE. 1/1						

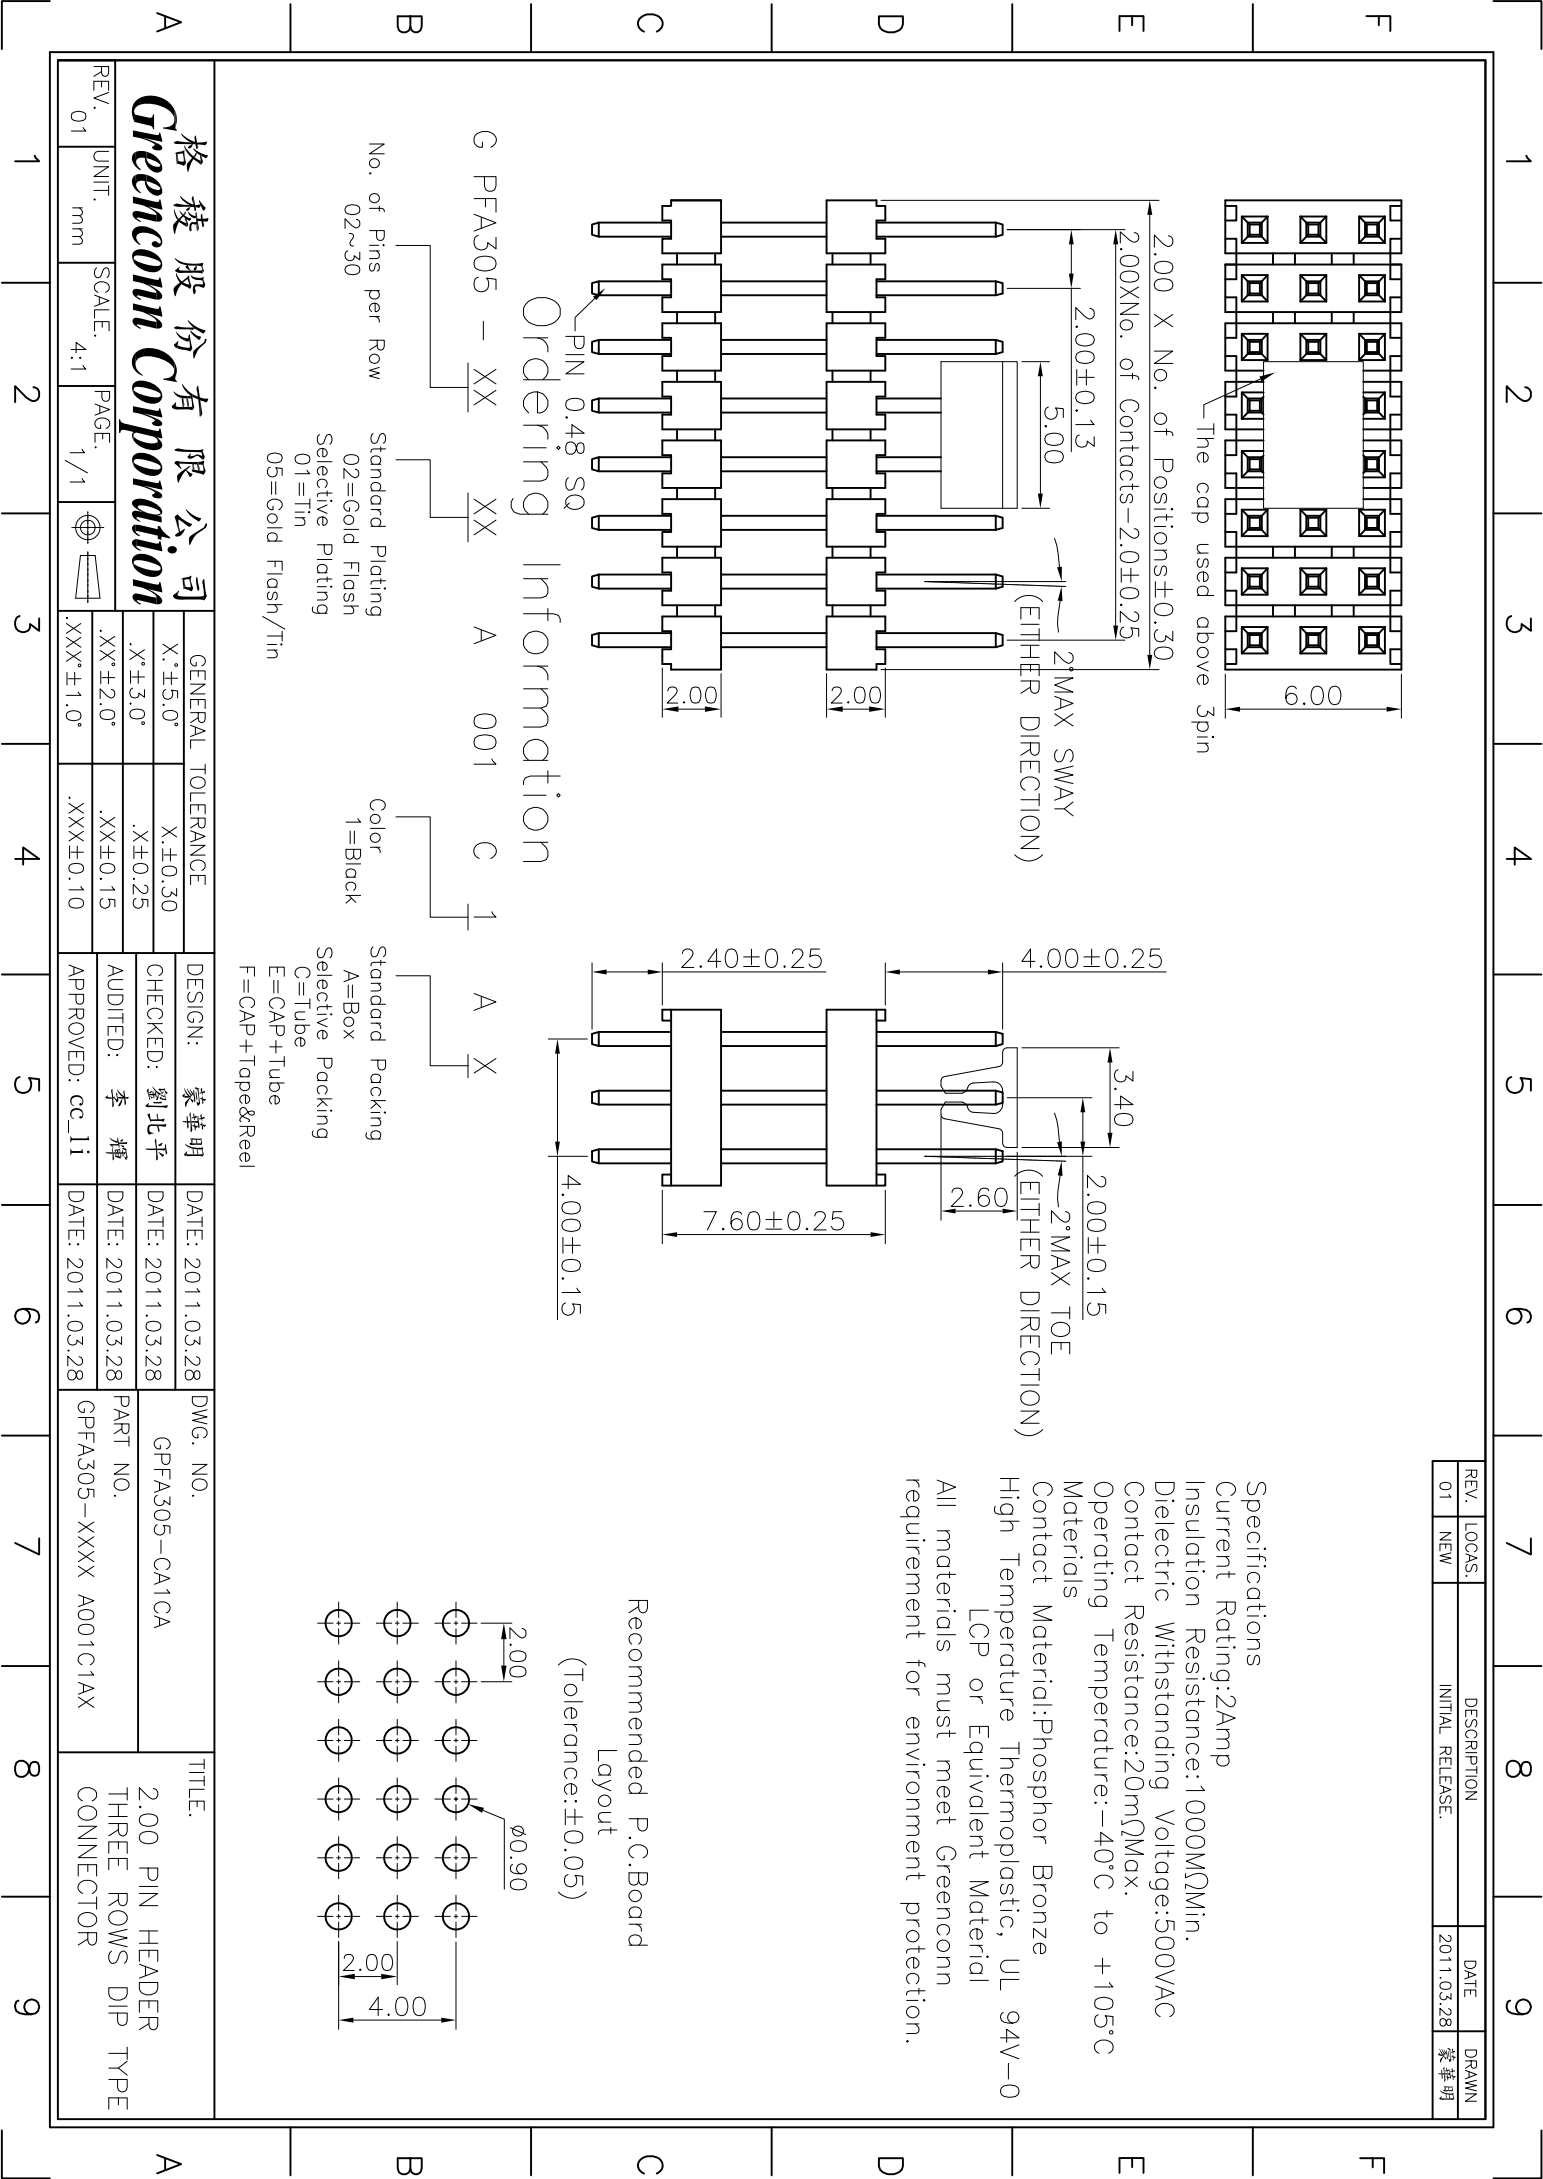

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [GREENCONN](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)