
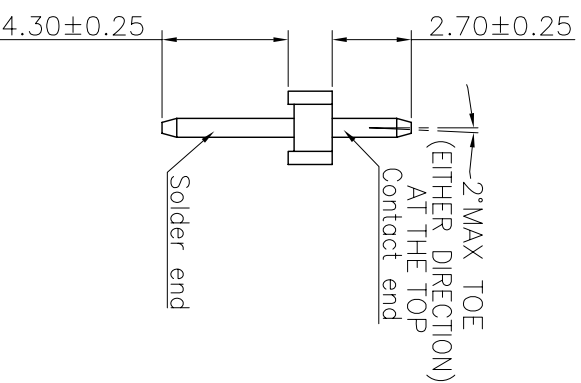
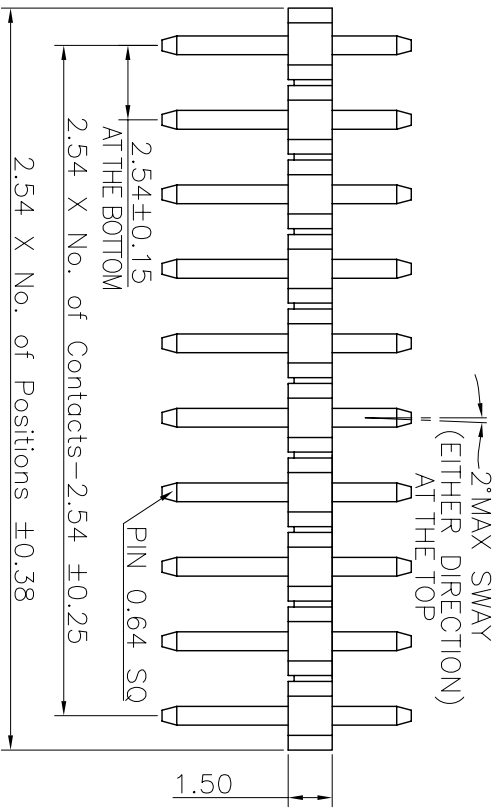


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	INITIAL RELEASE.	2013.08.08	李芳忠

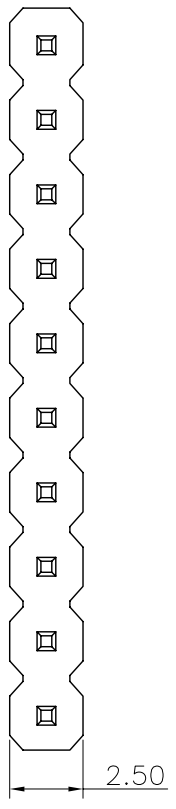


Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000MΩMin.
 Dielectric Withstanding Voltage: 600VAC
 Contact Resistance: 20mΩMax.
 Operating Temperature: -40°C to +105°C
 Materials
 Contact Material: Brass
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon 6T(Halogen Free) or the equivalent material
 All materials must meet Greenconn requirement for environment protection.

Ordering Information

G PHA109 - XX XX A 017 R 1 B X

- No. of Pins per Row: 01~40
- Standard Plating: 02=Gold Flash, 01=Tin, 05=Gold Flash/Tin
- Color: 1=Black
- Standard Packing: A=Box, C=Tube
- Selective Plating

Recommended P.C.Board Hole Layout
 (Tolerance: ±0.05)



REV. 01	UNIT. mm	SCALE. 4:1	PAGE. 1/1		GENERAL TOLERANCE		DESIGN: 李芳忠	DWG. NO. GPHA109-CA17RB	TITLE. 2.54 PIN HEADER SINGLE ROW DIP TYPE CONNECTOR
	X: ±5.0°	X: ±3.0°	X: ±0.30		CHECKED: 劉北平	DATE: 2013.08.08	PART NO. GPHA109-XXXX A017R1BX		
					.XX' ±2.0°	.XX ±0.15	AUDITED:		
					.XXX' ±1.0°	.XXX ±0.10	APPROVED:		

格 菱 股 份 有 限 公 司
Greenconn Corporation

1 2 3 4 5 6 7 8 9

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [GREENCONN](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)