

REV. LOCAS. DESCRIPTION DATE DRAWN

01 NEW BATCH PRODUCTION INITIAL RELEASE. 2017.06.13 何東華

Specifications
 Current Rating:3Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:600VAC
 Contact Resistance:20mΩMax.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material: Brass
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP
 or the equivalent material
 All materials must meet Greenconn requirement for environment protection.

Ordering Information

G PHC201 - XX XX A 002 C 1 B X


No. Of Pins Per Row
02~40

Standard Plating
02=Gold Flash
Selective Plating
01=Tin
05=Gold Flash/Tin

Color
1=Black

Standard Packing
C=Tube(04~40Pin)
Selective Packing
A=Box
E=Cap+Tube(04~40Pin)
F=Cap+Tube&Reel

Dim.D	NOTE
5.00	02Pins
6.00	03~08Pins
8.50	09~40Pins

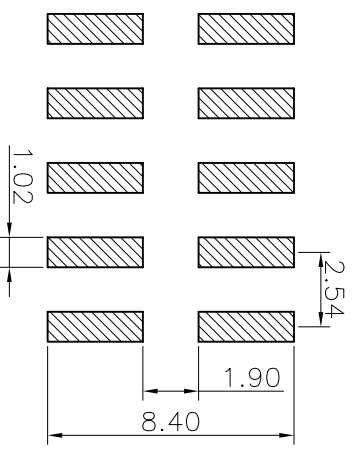

Recommended P.C.Board
Layout
(Tolerance:±0.05)

REV. 01	UNIT. mm	SCALE. 4:1	PAGE. 1/1	GENERAL TOLERANCE X:±5.0° X:±3.0° .XX:±2.0° .XXX:±1.0°	DESIGNED: 何東華	DATE: 2017.06.13	DWG. NO. GPHC201-CA2CB	TITLE. 2.54 PIN HEADER DUAL ROWS SMT TYPE CONNECTOR
	SCALE. 4:1	PAGE. 1/1	APPROVED: 劉北平		DATE: 2017.06.13	PART NO. GPHC201-XXXX A002C1BX		

格菱股份有限公司
Greenconn Corporation

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [GREENCONN](#) manufacturer:

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [009176003701906](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#)
[65781-018](#) [65781-047](#) [65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#)
[M90C108951C](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-](#)
[3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#)
[803-43-024-10-001000](#)