


1 2 3 4 5 6 7 8 9

F
E
D
C
B
A

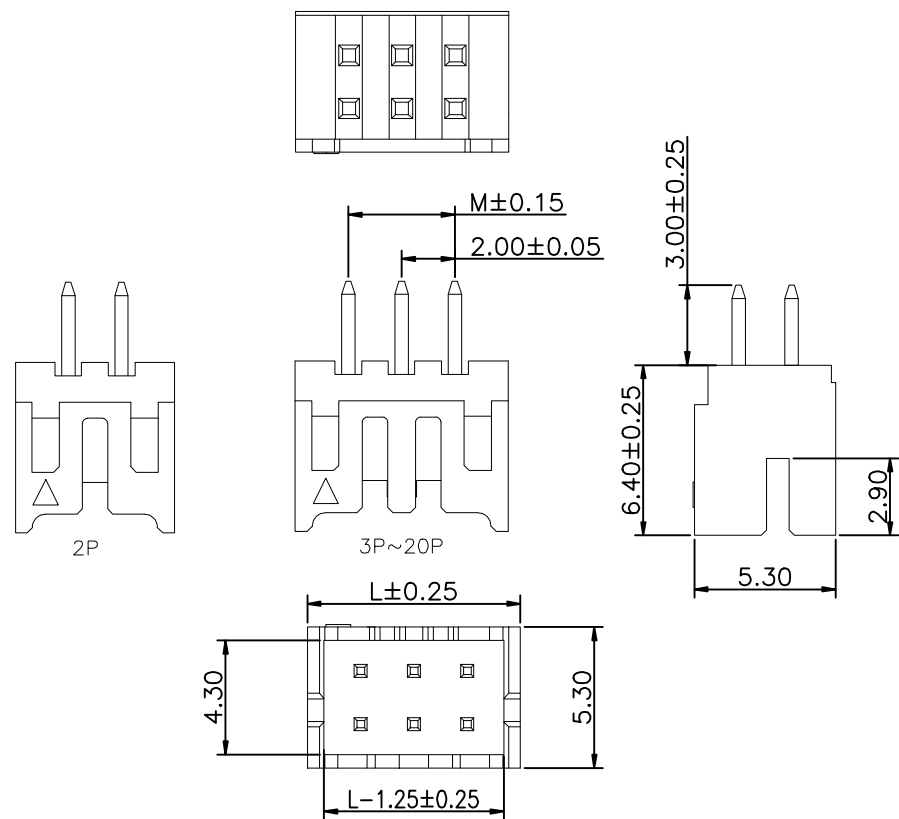


Specifications
 Voltage rating:250V AC DC
 Current Rating:3A AC,DC
 Withstanding Voltage:800VAC
 Insulation Resistance:1000MΩ Min.
 Temperature Range:-25°C to +85°C
 Contact Resistance:Initial value/10mΩ Max.after environmental testg20mΩ
 Materials
 Contact Material:Brass
 Insulator Material:NY9T UL94V-0
 All materials must meet GREENCONN hazardous substances control standards.

No. of PIN/ROW	Dimension Information	
	M	L
02	2.00	6.00
03	4.00	8.00
04	6.00	10.00
05	8.00	12.00
06	10.00	14.00
07	12.00	16.00
08	14.00	18.00
09	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00
16	30.00	34.00
17	32.00	36.00
18	34.00	38.00
19	36.00	40.00
20	38.00	42.00

Ordering Information

G WFA210 - XX XX A 001 D 2 Z X

No. of Pins per Row 02~20 Standard Plating 01=Tin
 Material D=Nylon 9T Color 2=White
 Standard Packing N=PE Bag

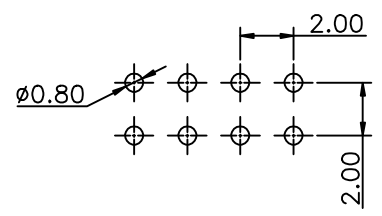

格菱股份有限公司
Greenconn Corporation

GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. GWFA210-CA1DZ
X:±5.0'	X.±0.30	CHECKED:	DATE:	
.X'±3.0'	.X±0.25	CO SIGEND:	DATE:	
.XX'±2.0'	.XX±0.15	APPROVED:	DATE:	
.XXX'±1.0'	.XXX±0.10			PART NO. GWFA210-XX01 A001D2ZN

TITLE:
 Pitch 2.0 Male Connector
 Terminal 180°

REV. 01	UNIT. mm	SCALE. 4:1	PAGE. 1/1	
---------	----------	------------	-----------	--

1 2 3 4 5 6 7 8 9

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [GREENCONN](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)