
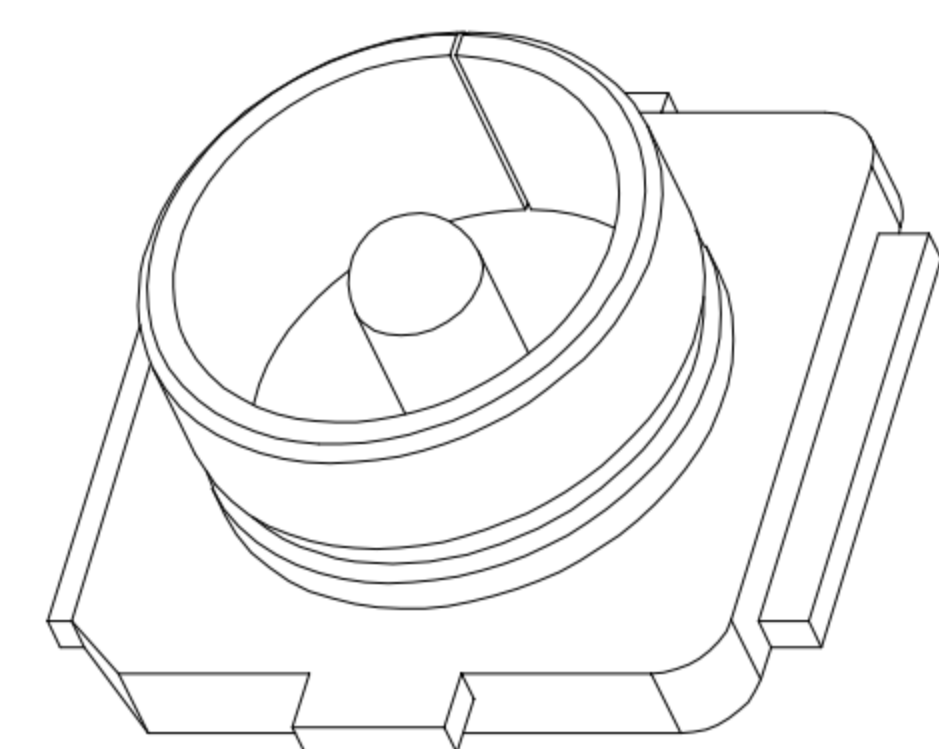


RECOMMENDED PCB LAYOUT 1  
TOLERANCE:±0.05


RECOMMENDED PCB LAYOUT 2  
TOLERANCE:±0.05

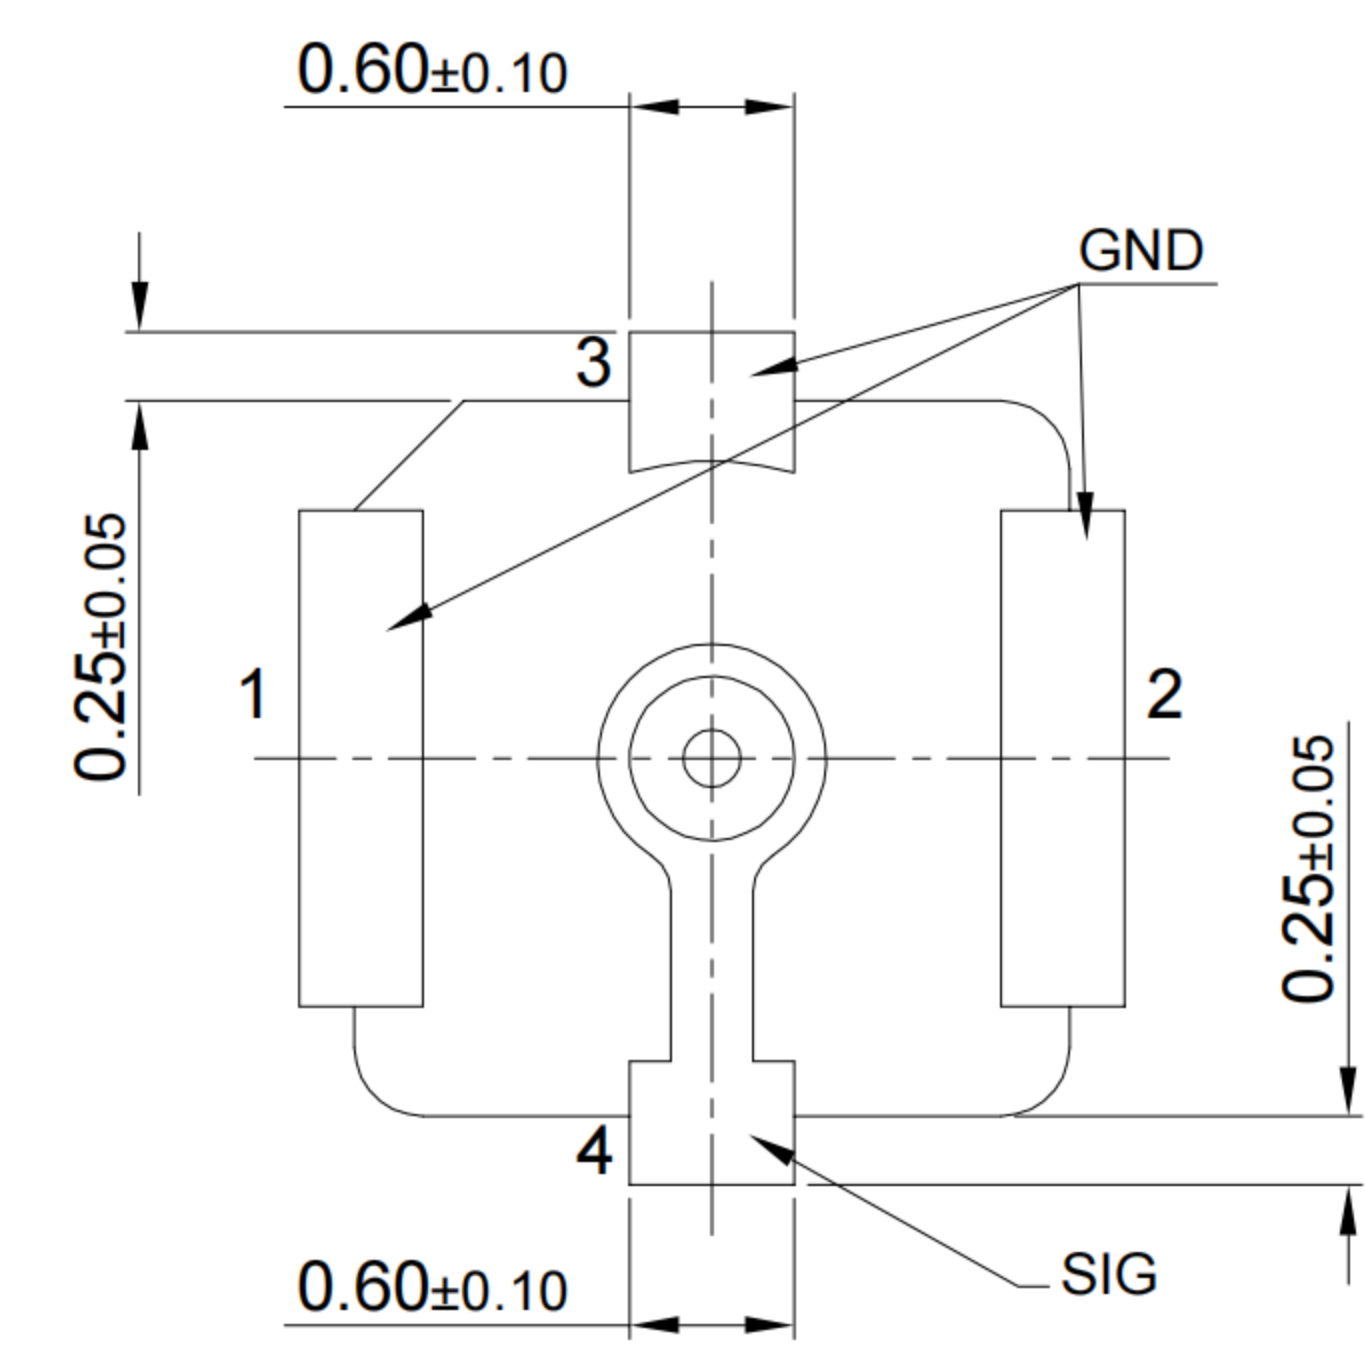

**G-Switch RF Specification:**

- 1.Contact Resistance: 20mΩ Max;
- 2.Dielectric Withstanding Voltage: 200V AC For 1 Minute;
- 3.Insulation Resistance: 1000MΩ Min;
- 4.Frequency Range: DC up to 6GHz  
Vswr:1.3 Max. at 0~3GHz;  
Vswr:1.4 Max. at 3~6GHz;
- 5.Operating Temperature: -40°C to + 90°C.
- 6.Heat sealed packaging

Item	Title	Material/Finish
1	Terminal	Copper Alloy/Gold Plated Over Ni
2	Shell	Copper Alloy/Gold Plated Over Ni
3	Housing	High Temp. Platic UL94V-0/White

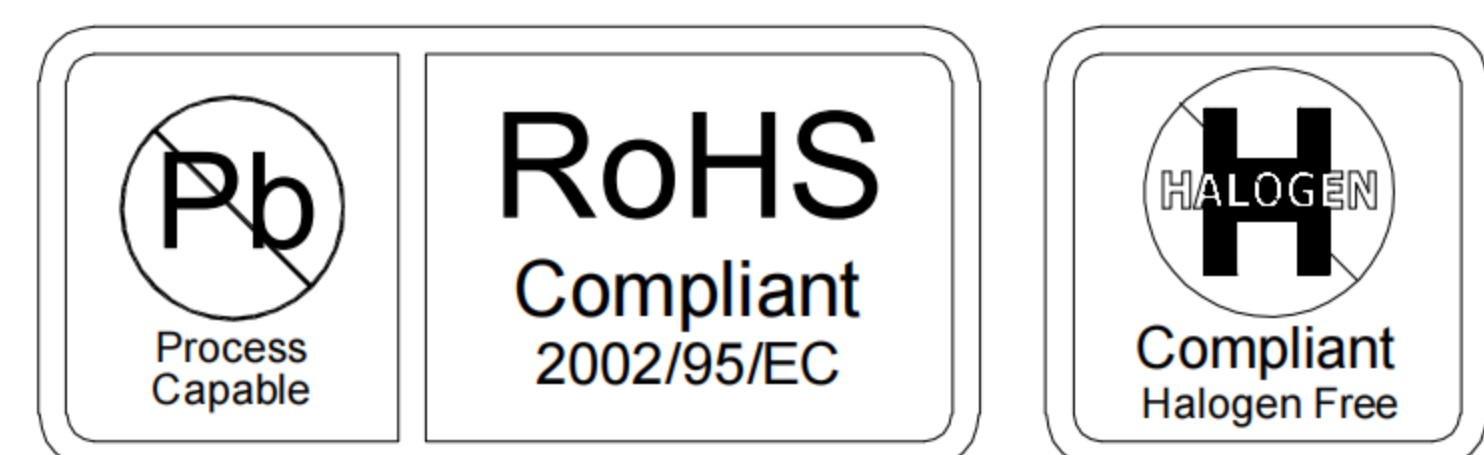

SCALE: 9:1	UNIT: mm
SIZE: A4	
Unless otherwise General Tolerance:	
X.	±0.30
X.x	±0.20
X.xx	±0.15
X.xxx	±0.10
Angles	±3°

Title: RF I Receptacle Conn SMT 2.6×2.6×H1.25mm			
Molde Code: GT-RF1125A-03G			
DRAWN	CHECKED	APPROVED	DATE
Xia	Chen	Chen	2022.11.30



REV: A0 SHEET: 1/1

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [RF Connectors / Coaxial Connectors](#) category:*

*Click to view products by [G-Switch](#) manufacturer:*

Other Similar products are found below :

[89674-0827](#) [6059674-1](#) [630059-000](#) [6501-1071-002](#) [6769](#) [7002-1541-010](#) [7002-1572-002](#) [7004-1512-000](#) [7009-1511-004](#) [7101-1541-010](#)  
[7101-1571-002](#) [7105-1521-002](#) [7145-1521-002](#) [7203-1571-003](#) [7209-1511-011](#) [7210-1511-040](#) [7242-1511-000](#) [7405-1521-005](#) [7405-1521-](#)  
[802](#) [804S01D04M040](#) [8527](#) [8547](#) [FS11V](#) [877931](#) [8808-1511-001](#) [9049-9513-000](#) [9074-9513-000](#) [PL11C-026](#) [PL40-36](#) [9408-1113-000](#)  
[980-8666-005](#) [11 SMA-50-2-6 / 111 NE](#) [11 SMA-50-3-6 / 111 NE](#) [11 SMA-50-2-6/111 NH](#) [1-201144-1](#) [120919](#) [R107003010W](#) [R112186000](#)  
[R113053000W](#) [R113082097](#) [R113236000](#) [R114083000](#) [R114670000W](#) [R123415000W](#) [R124072220W](#) [R124076320](#) [R124076450](#)  
[R124175123](#) [R124176123W](#) [R125075000W](#)