



P.C.B LAYOUT  
BOTTOM VIEW



**PS-22E05XX**



**SCHEMATIC (NON-SHORTING)**

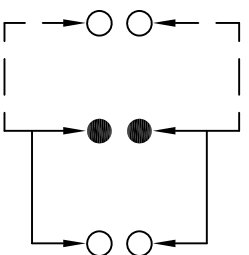

- A=黑色
- B=红色
- C=蓝色
- D=其它

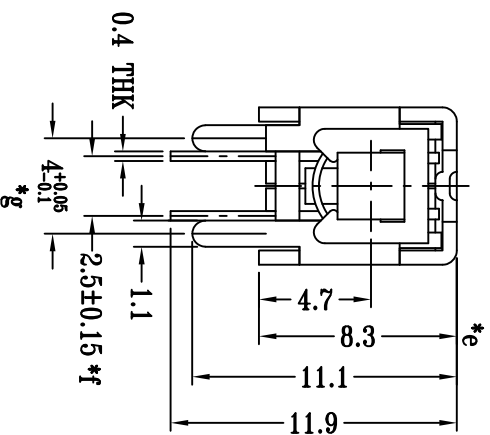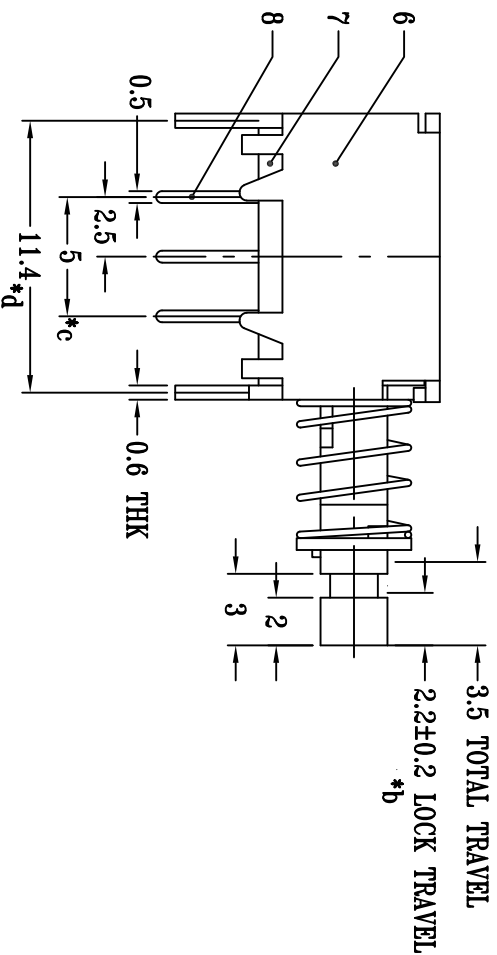

**G-Switch Specification:**  
 Electrical Specifications: 0.5A 30VDC  
 Contact Resistance:  $\leq 100m\Omega$   
 Insulation Resistance:  $\geq 100M\Omega$  DC125V  
 Withstand Voltage: AC125V 1 minute  
 Operating Temperature: -25°C~+65°C  
 Storage Humidity:  $\leq 85\%RH$   
 Electrical Life: 10 000  
 Mechanical Life: 100 000

注：“\*”表示关键尺寸(7个)



Unless otherwise specified, Tolerance:  
 X ±0.30  
 X.X ±0.20  
 X.XX ±0.15  
 X.XXX ±0.10  
 Angles ±3

G-Switch Electronic (HongKong) CO.,Ltd.

DESIGN Bright Lee DATE 2016.05.29 Mold code:

CHECKED DATE APPROVED DATE

APPROVED DATE

http://www.dg-switch.com

TEL:0769-82388879

PS-22E05

REV: X1 SCALE: 4:1 UNIT: mm

SIZE: A4 SHEET: 1/1

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pushbutton Switches](#) category:*

*Click to view products by [G-Switch](#) manufacturer:*

Other Similar products are found below :

[8971K1133](#) [LW1L-M1C10V-A](#) [LW2L-M1C20M-A](#) [M22-D-R-GB0/K11](#) [67081K512X](#) [701PB580](#) [7199K101](#) [810K12910](#) [810KSV30B](#)  
[FLT 2U EE 01A](#) [MML21EA2ADK](#) [MML21KA3ABK](#) [MML23KA3AC05K-001](#) [MML23KW3AA01W](#) [8418K2](#) [8442K3](#) [8450K1](#)  
[860K11911T01A](#) [861901](#) [861K11911T01A07](#) [861K13810T00A14](#) [861K13911](#) [8646AB6X718UL](#) [8646ABUL](#) [9533CD4+U574+U4922](#) [95-414.000](#) [99-453.837](#) [A22NZBGANGA](#) [A22NZBMMNGA](#) [A22NZBNANGA](#) [A22NZMPATRA](#) [A2PMA1X03EC56](#) [A3A-7310](#) [A3A-7340](#)  
[12037A2ULCSA](#) [1203A2UL](#) [ABGW410-R](#) [1211390004](#) [ABN400-R](#) [121382](#) [1213C3](#) [HE3B-M2](#) [1211500044](#) [1211580012](#) [121194](#)  
[1212MRA](#) [1232A6NF](#) [1241.1183.7047](#) [121489](#) [1223A2ULCSA](#)