


### PS-5824DVX-4PN



**G-Switch Specification:**  
 Operating temperature range: -40°C to +85°C  
 Rating: 0.5A, 24V DC  
 Insulation resistance: 100MΩ min., 100V DC  
 Dielectric strength: 250V AC for 1 min  
 Contact resistance: 100mΩ max.  
 Switch lifetime: 30,000 cycles

8	TERMINAL	BRASS	6	Ag PLATED
7	CASE	PPA	1	BLACK
6	LOCK PIN	SUS WIRE	1	NATURAL
5	SPRING	SUS WIRE	1	NATURAL
4	CONTACT	BRONZE	2	Ag PLATED
3	KNOB	PPA	1	WHITE
2	COVER	PPA	1	BLACK
NO.	PART NAME	MATERIAL	QTY	FINISHING

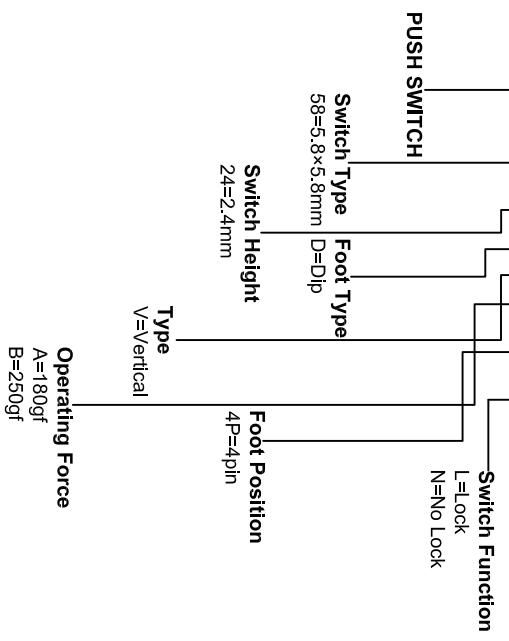

**G-Switch** 品豐科技

Unless otherwise specified, Tolerance:  
 X: ±0.30  
 X.X: ±0.20  
 X.XX: ±0.15  
 X.XXX: ±0.10  
 Angles: ±3°

**G-Switch Electronic (HongKong) CO., Ltd.**

DESIGN: Feng<sup>2</sup> DATE: 2022.08.12  
 CHECKED: DATE: \_\_\_\_\_  
 APPROVED: DATE: \_\_\_\_\_

Mold code: PS-5824DVX-4PN

REV.: X1 SCALE: 4:1 UNIT: mm  
 SIZE: A4 SHEET: 1/1

http://www.dg-switch.com  
 TEL: 0769-82388879

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pushbutton Switches](#) category:*

*Click to view products by [G-Switch](#) manufacturer:*

Other Similar products are found below :

[8971K1133](#) [LW2L-M1C20M-A](#) [M22-D-R-GB0/K11](#) [67021K512](#) [701PB580](#) [7199K101](#) [810K12910](#) [810KSV30B](#) [FLT 2U EE 01A](#)  
[MML21EA2ADK](#) [MML21KA3ABK](#) [MML23KA3AC05K-001](#) [MML23KW3AA01W](#) [8418K2](#) [8442K3](#) [8450K1](#) [860K11911T01A](#) [861901](#)  
[861K11911T01A07](#) [861K13810T00A14](#) [861K13911](#) [8646AB6X718UL](#) [9533CD4+U574+U4922](#) [99-450.837](#) [99-453.837](#)  
[A2PMA1X03EC56](#) [A3A-7310](#) [A3A-7340](#) [12037A2ULCSA](#) [1203A2UL](#) [ABGW410-R](#) [1211390004](#) [ABN400-R](#) [121382](#) [1213C3](#) [HE3B-M2](#)  
[1211500044](#) [121194](#) [1212MRA](#) [1232A6NF](#) [1241.1183.7047](#) [121489](#) [1223A2ULCSA](#) [1241.1183.8000](#) [1241.1183.8029](#) [D5P-MT4](#)  
[13435AG](#) [13445AD29GX768](#) [AG23-L2](#) [AH165-2SGLG1TE3](#)